


### Description

High-power broadband surface-mounted and embedded coupler series, realizing the power synthesis and distribution of microwave high-power amplifier system, signal acquisition and other functions. Used in active phased array radar, microwave transceiver components, microwave amplifiers, radio stations, satellite communications and other projects, to provide standardized and customized high-quality and reliable products.

The performance and reliability indexes are in line with international products, and the pin definition and package size are compatible with international products, realizing 100% in-situ replacement.

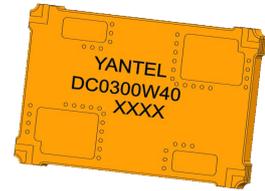

### Features:

- 100-500 MHz
- DCS & PCS
- Low Insetion Loss
- High Directivity
- Low VSWR
- Good Repeatability
- CTE compatible with FR4, G-10, RF-35, RO4350B and polyimide
- Immersion gold, prevent surface oxidation & scratch
- RoHS Compliant
- Tape & Reel Package available


### Electrical Specifications (typical)

Frequency MHz	Forward Coupled dB	Directivity dB Min	Return Loss dB Min
100-500	40±1	18.5	19
		Operating Temp. °C	
	Insertion Loss dB Max	Power Avg. CW Watts	
	0.25	300	-55 to +85

Note:


1. All above test data resulting from specify demo board.
2. Insertion loss has removed the thru board loss.

### Mechanical Outline

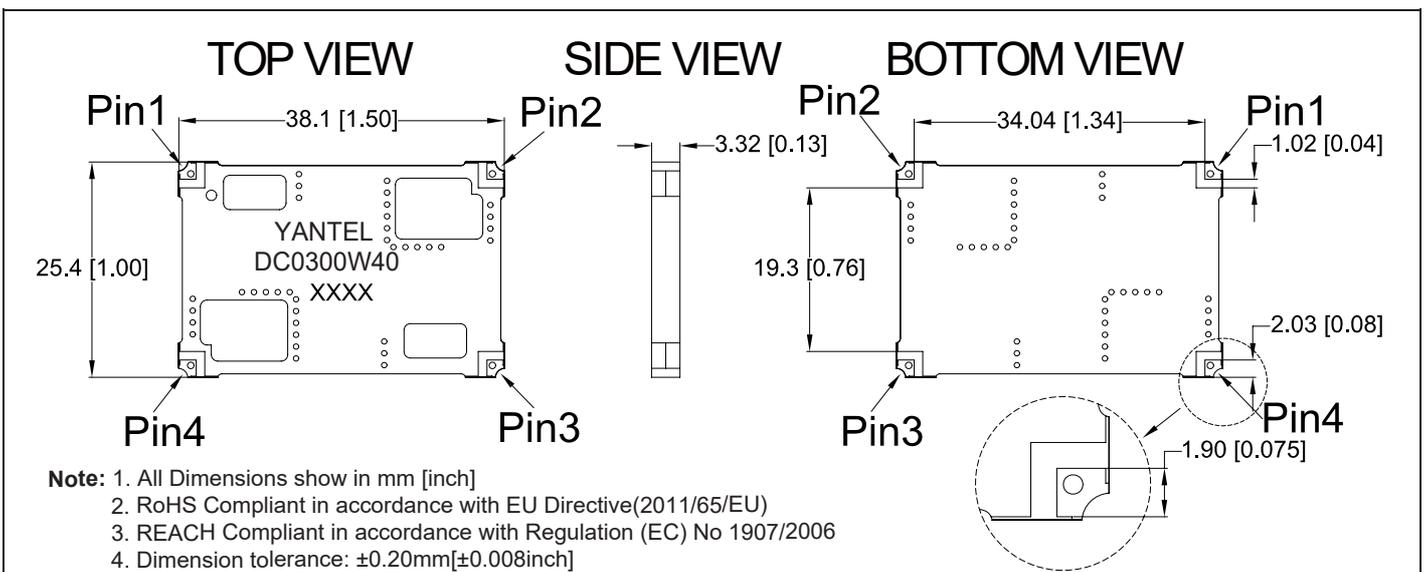

### Directional Coupler Pin Configuration

The DC0300W40 has an orientation marker to denote Pin1. Once port one has been identified the other ports are known automatically. Please see the chart below for clarification:

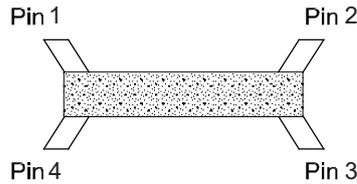


Pin 1	Pin 2	Pin 3	Pin 4
Input	Reflected Coupled	Transmission	Forward Coupled
Transmission	Forward Coupled	Input	Reflected Coupled


### Typical Performance Data (@25°C)

Frequency (MHz)	Forward Coupled (dB)	Transmission (dB)	Insertion Loss (dB)	Reflected Coupled (dB)	Return Loss(dB)	
					S11	S33
100	-39.82	-0.01	-0.01	-60.33	-35.52	-35.96
120	-39.69	-0.01	-0.01	-59.96	-32.51	-34.40
140	-39.64	-0.01	-0.01	-60.50	-32.42	-32.14
160	-39.66	-0.03	-0.03	-60.08	-32.25	-30.55
180	-39.77	-0.04	-0.04	-60.93	-30.81	-30.85
200	-39.82	-0.04	-0.04	-60.57	-29.69	-29.92
220	-39.95	-0.06	-0.06	-60.58	-29.03	-29.22
240	-39.97	-0.06	-0.06	-61.23	-28.22	-28.24
260	-40.00	-0.08	-0.08	-61.39	-27.58	-27.32
280	-40.06	-0.08	-0.08	-62.00	-27.24	-27.17
300	-40.11	-0.09	-0.09	-62.08	-26.67	-26.70
320	-40.13	-0.10	-0.10	-61.85	-26.35	-26.40
340	-40.21	-0.10	-0.10	-62.34	-25.80	-25.77
360	-40.22	-0.11	-0.11	-62.38	-25.62	-25.56
380	-40.22	-0.12	-0.04	-63.21	-25.33	-25.41
400	-40.35	-0.12	-0.03	-63.98	-25.19	-25.56
420	-40.29	-0.13	-0.04	-63.83	-25.05	-25.47
440	-40.31	-0.13	-0.06	-63.24	-25.08	-25.41
460	-40.34	-0.13	-0.13	-62.98	-25.17	-25.43
480	-40.36	-0.14	-0.14	-64.83	-25.36	-25.44
500	-40.31	-0.14	-0.14	-65.62	-25.43	-25.24

**Typical Performance ( -55°C, 25°C, 95°C, 125°C : 100-500 MHz)**

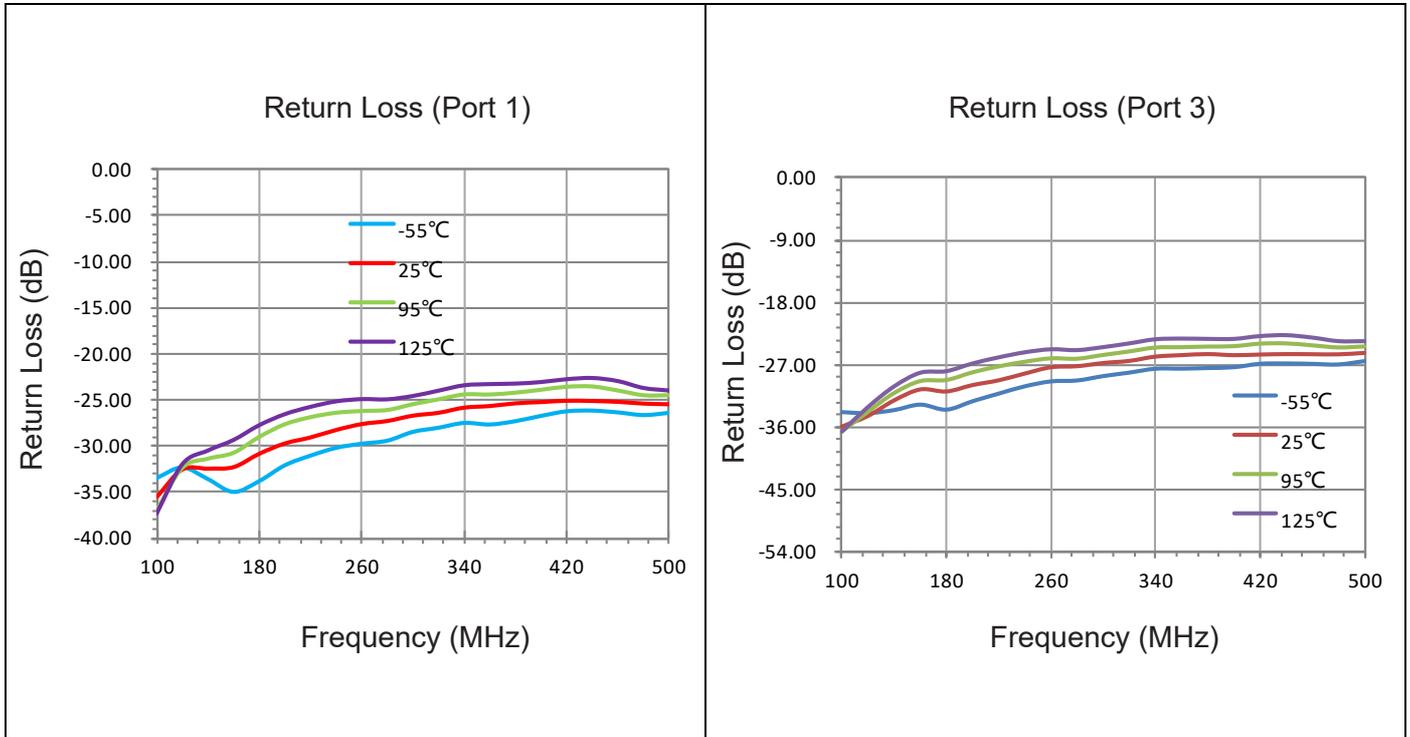

**Typical Performance ( -55°C, 25°C, 95°C, 125°C : 100-500 MHz)**

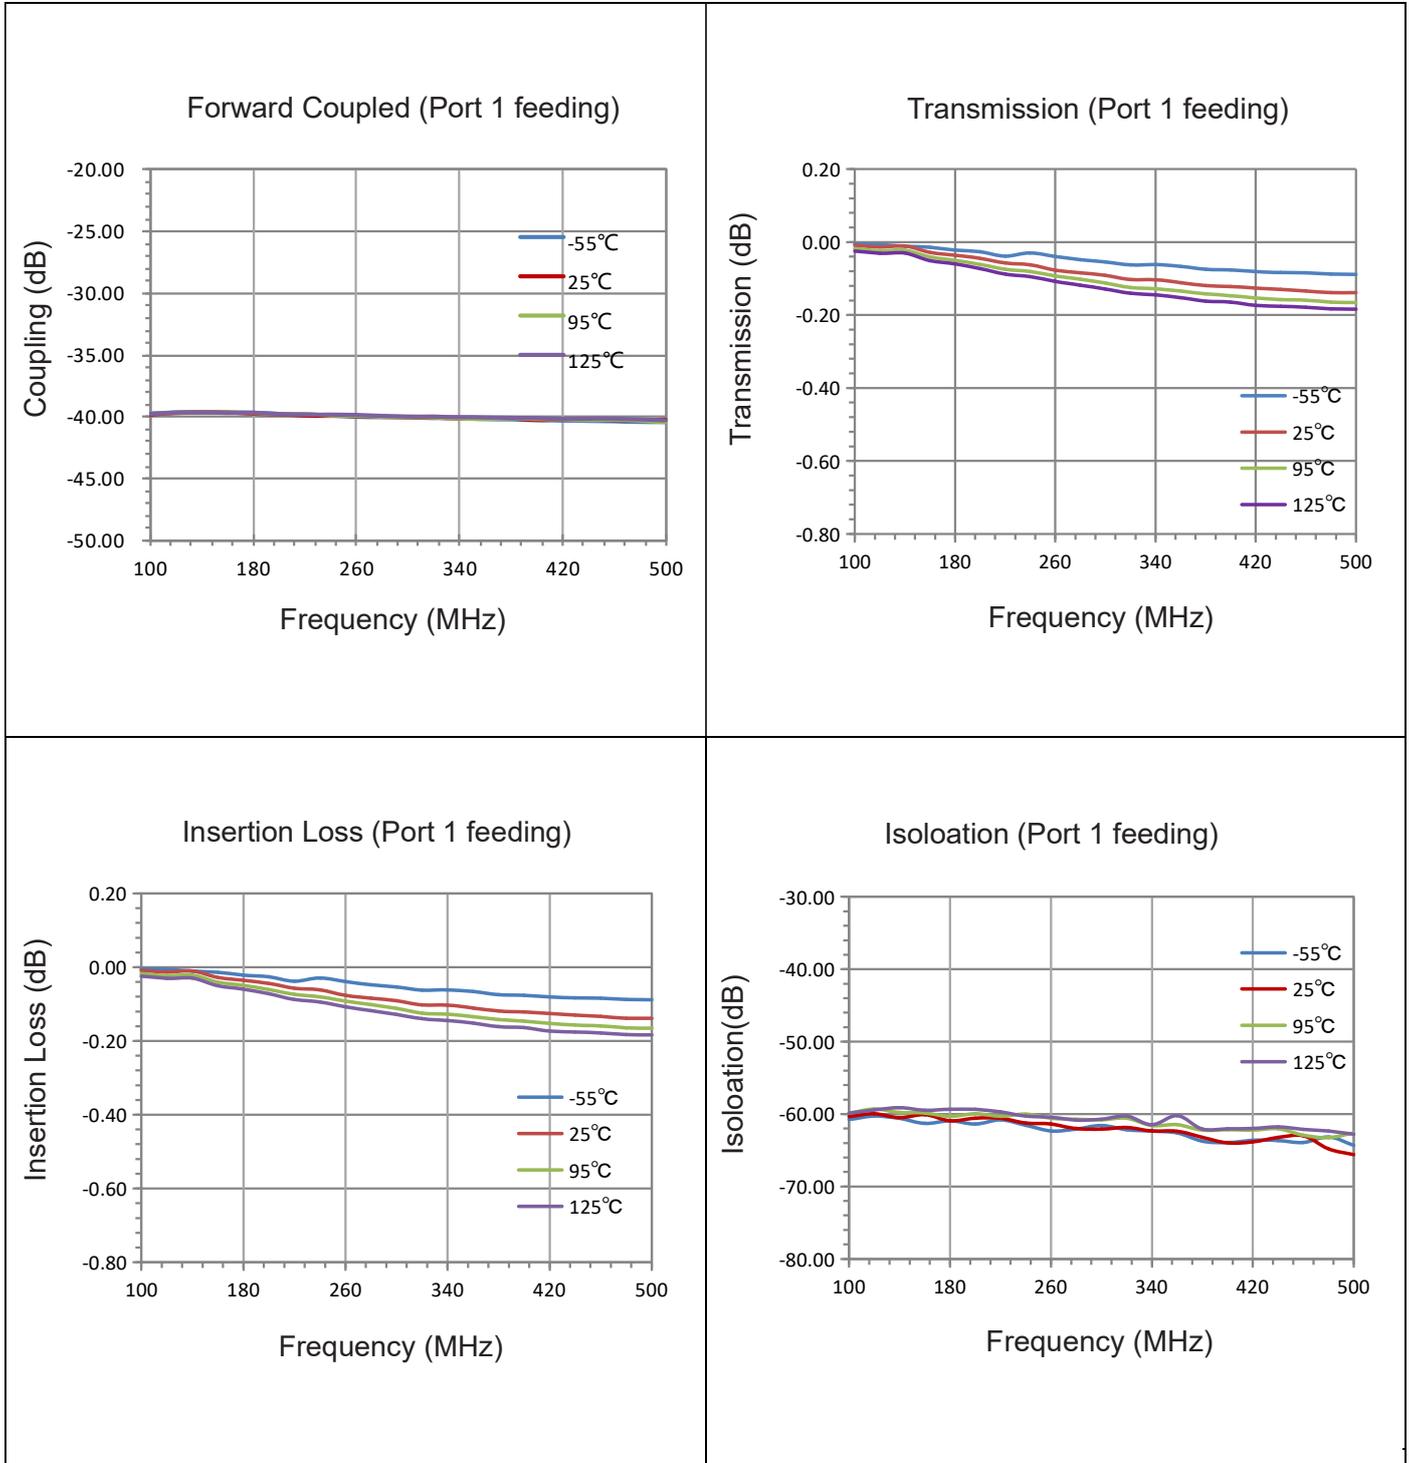

### Description of Measured Specifications


Parameter	Description
<b>VSWR</b>	Voltage standing wave ratio, the impedance match to $50\ \Omega$ , the ideal value is 1:1.
<b>Return Loss</b>	Loss of signal power resulting from the reflection caused by discontinuity of transmission line.
<b>Insertion Loss</b>	The input power divided by sum of power at the Forward Coupled port & transmission port
<b>Forward Coupled</b>	The input power divided by the power at coupling port.
<b>Transmission</b>	The input power divided by the power at transmission port.
<b>Directivity</b>	The power at the Forward Coupled port divided by the power at the Reflected Coupled port

### Test Method


1. Calibrating your vector network analyzer.
2. Connect the VNA 4 Port to DUT respectively.
3. Measure the data of Forward coupled through port 1 to port 4(S41).
4. Measure the data of transmission through port 1 to port 3(S31).
5. Measure the data of Reflected Coupled through port 1 to port 2(S21).
6. Measure the data of return loss port 1, port 3.
7. According to the above data to calculate insertion loss, directivity.

Note:

1. When calculating insertion loss at room temperature, coupling & transmission data both need remove demo board loss. Please see demo board loss data below the table :

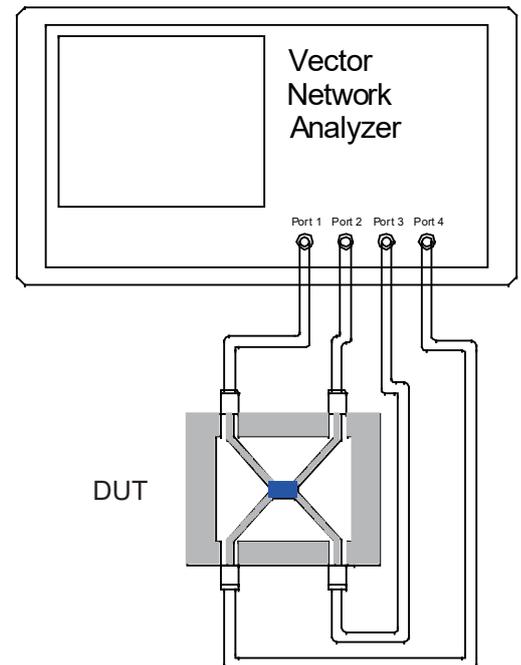


### Recommended PCB Layout

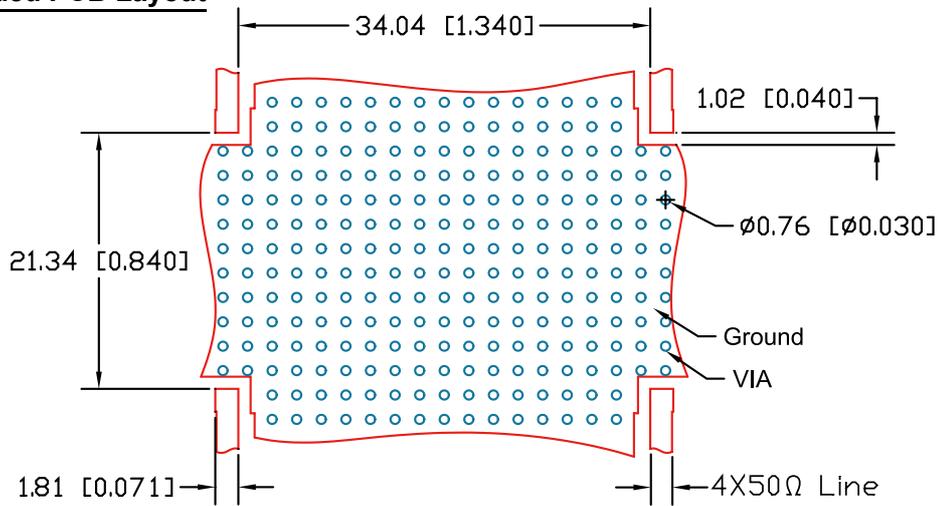


### NOTE:

1. 50Ω line width is shown above designing from RO4003 dielectric thickness 0.81mm; copper 1 OZ
2. Bottom side of the PCB is continuous ground plane.
3. All dimensions shown in mm [inch].

### Reflow Profile

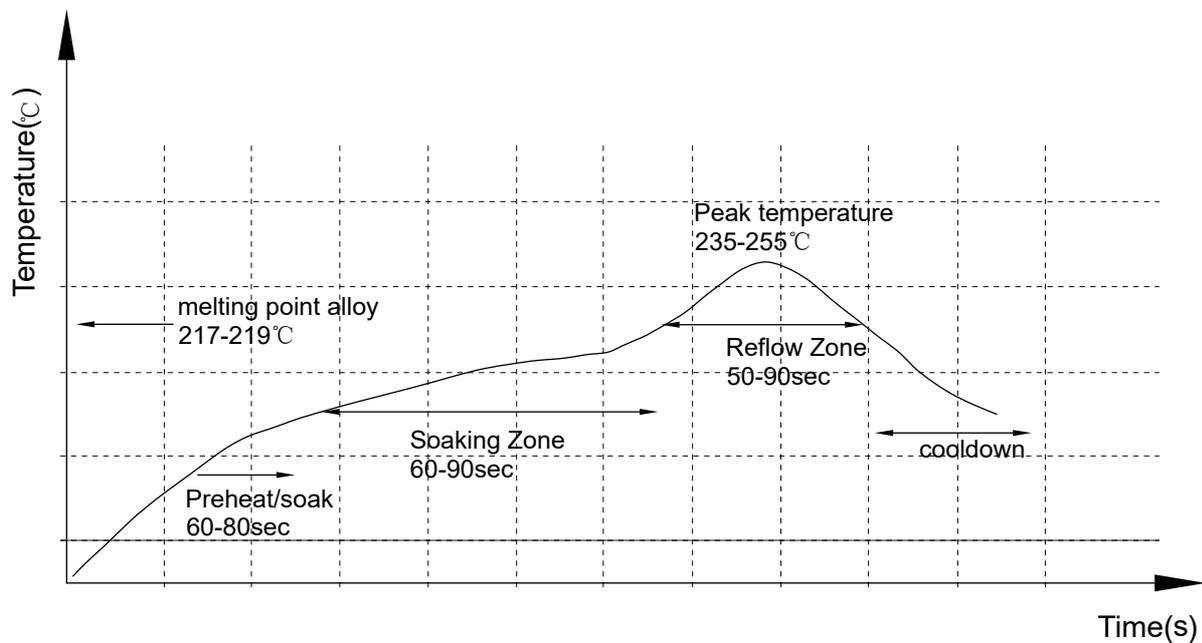

### Reliability Test Flow

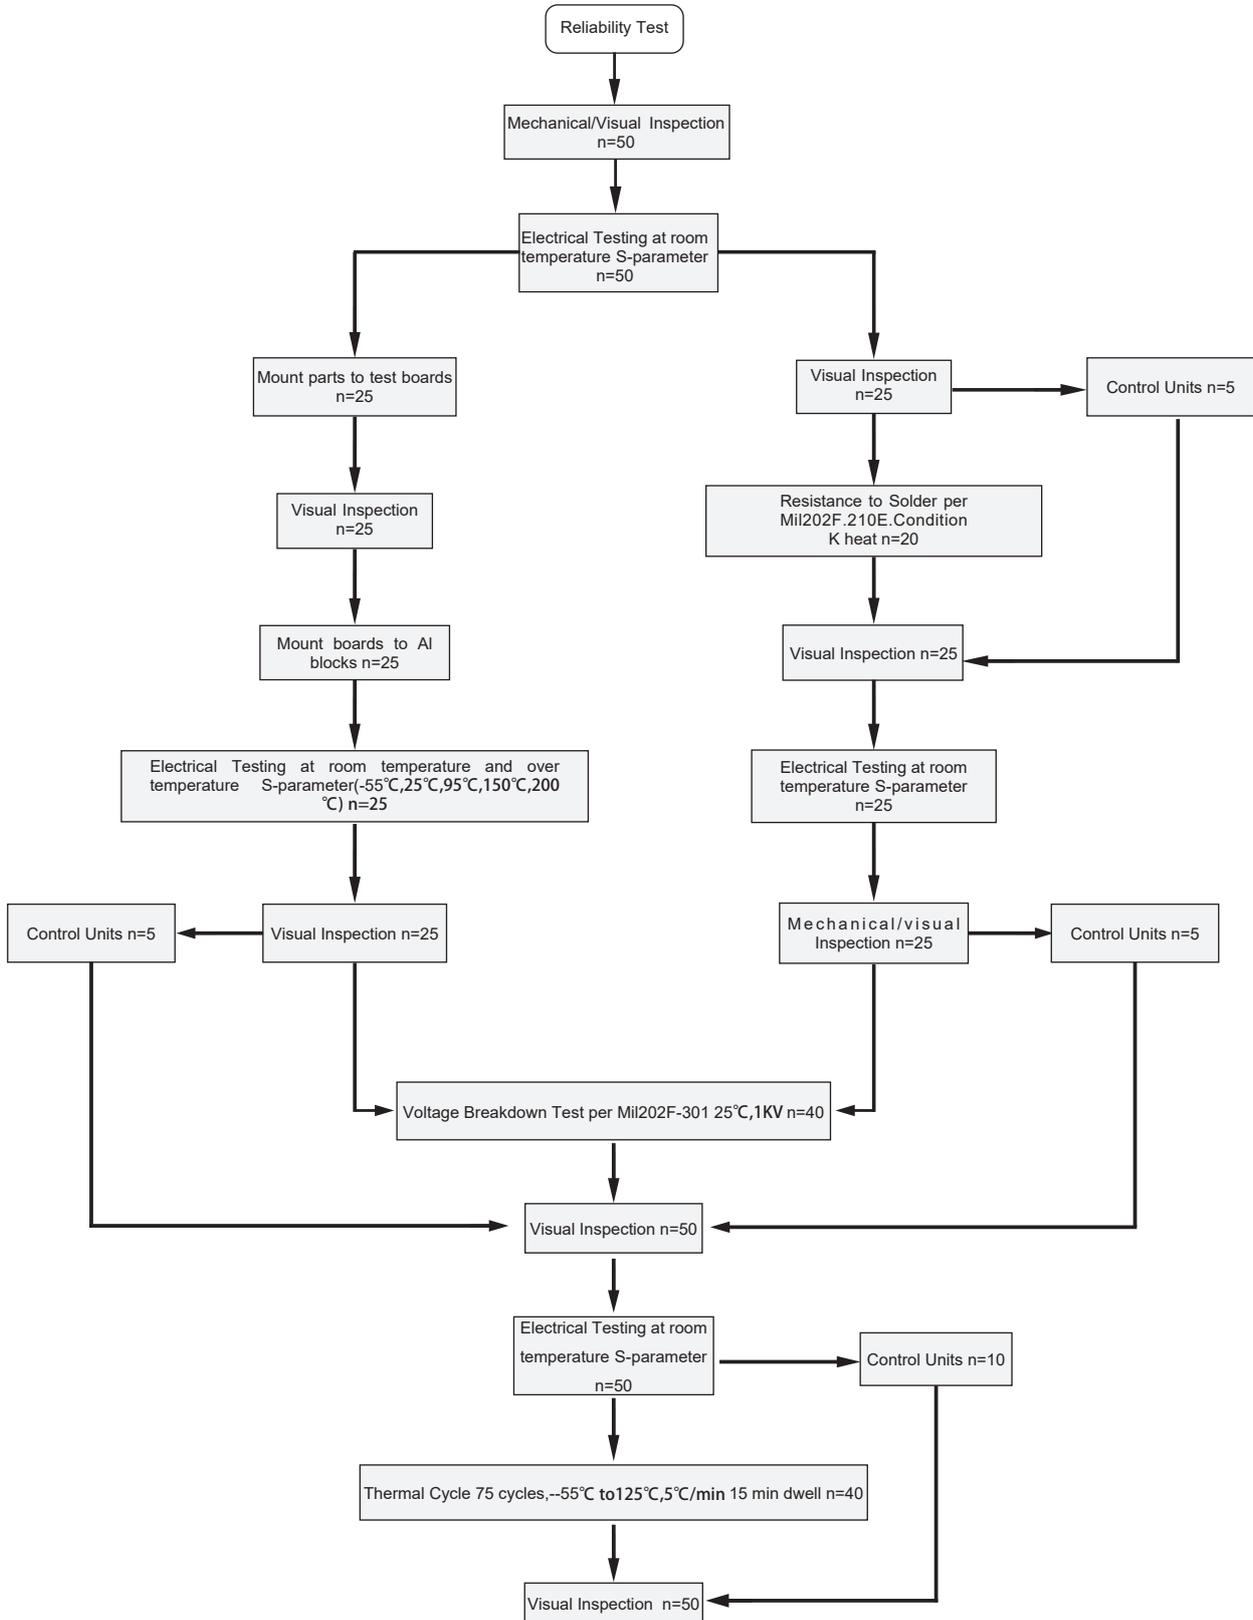

### Reliability Test Flow

