


Electrical Specifications

Parameter	ROOM (25°C)						Unit
	Min.	Typ.	Max	Min.	Typ.	Max	
Frequency	300		2200	700		2000	MHz
Unbalanced Port Impedance		50			50		Ohm
Balanced Port Impedance		50			50		Ohm
Return Loss	12.2	16		12.2	16		dB
Insertion Loss*		1.3	1.6		0.4	0.7	dB
Amplitude Balance		1.1	1.3		0.4	0.7	dB
Phase Balance		17	21		7	9	Degrees
CMRR		15			24		dB
Power Handling			2@85°C 1.2@105°C			2@85°C 1.2@105°C	Watts
Operating Temperature	-55		+140	-55		+140	°C

* Insertion Loss stated at room temperature (Insertion Loss is approximately 0.1 dB higher at +85°C).

Outline Drawing:

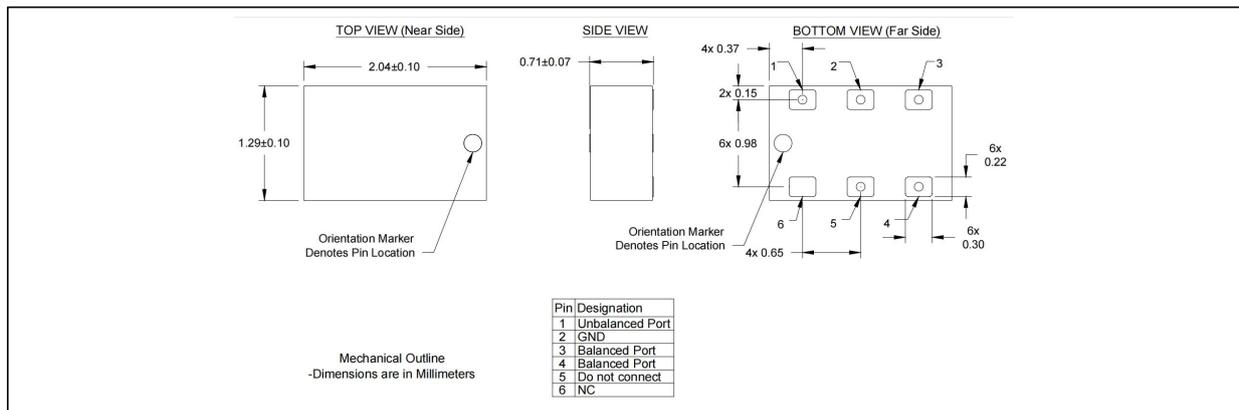

Mounting Configuration:

