


### Electrical Specifications

Parameter	ROOM (25°C)						Unit
	Min.	Typ.	Max	Min.	Typ.	Max	
Frequency	5900		8500	10000		11700	MHz
Unbalanced Port Impedance		50			50		Ohm
Balanced Port Impedance		100			100		Ohm
Return Loss	14	22		14	25		dB
Insertion Loss		0.4	0.7		0.6	0.9	dB
Amplitude Balance		0.8	1.3		0.9	1.6	dB
Phase Balance		9	12		7	13	Degrees
CMRR		21			24		dB
Power Handling			1@85°C 0.6@105°C			1@85°C 0.6@105°C	Watts

\* Insertion Loss stated at room temperature (Insertion Loss is approximately 0.1 dB higher at +85°C).

### Outline Drawing:

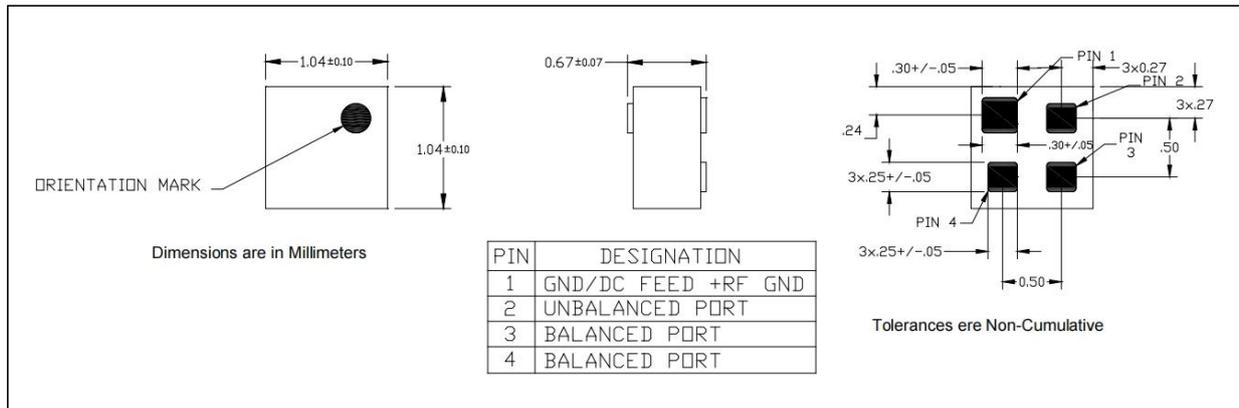

### Mounting Configuration:

