


Description

The products are widely used in China and global 4G/5G base station, 5G network coverage, BeiDou navigation antenna, vehicle-mounted high-precision navigation (unmanned) antenna and other applications. The products have miniaturization, low-loss, wide-bandwidth, high power density, high reliability, high cost-effective and other competitive advantages.

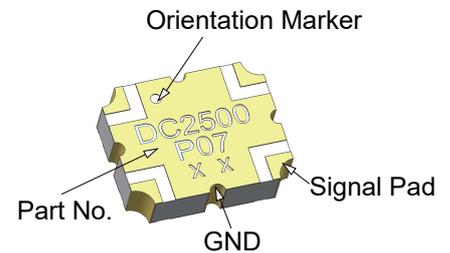

Features:

- 1710-3600 MHz
- W-LAN & MMDS
- Low Insertion Loss
- High Directivity
- Low VSWR
- Good Repeatability
- CTE compatible with FR4, G-10, RF-35, RO4350B and polyimide
- Immersion gold, prevent surface oxidation & scratch
- RoHS Compliant
- Tape & Reel Package available


Electrical Specifications

Frequency	Coupling	Directivity	VSWR
MHz	dB	dB Min	Max : 1
1710 - 1800	6.8±0.40	20	1.22
1920 - 2170	6.5±0.40	20	1.22
2515 - 2675	6.0±0.40	20	1.22
3300 - 3600	7.4±0.80	10	1.65
Insertion Loss	Power	Operating Temp.	
dB Max	Avg. CW Watts	°C	
0.25	60	-55 to +125	
0.25	60	-55 to +125	
0.30	60	-55 to +125	
0.50	60	-55 to +125	

Notes:


1. All the above data are based on specified demo board.
2. Insertion loss: Thru board loss has been removed.

Mechanical Outline

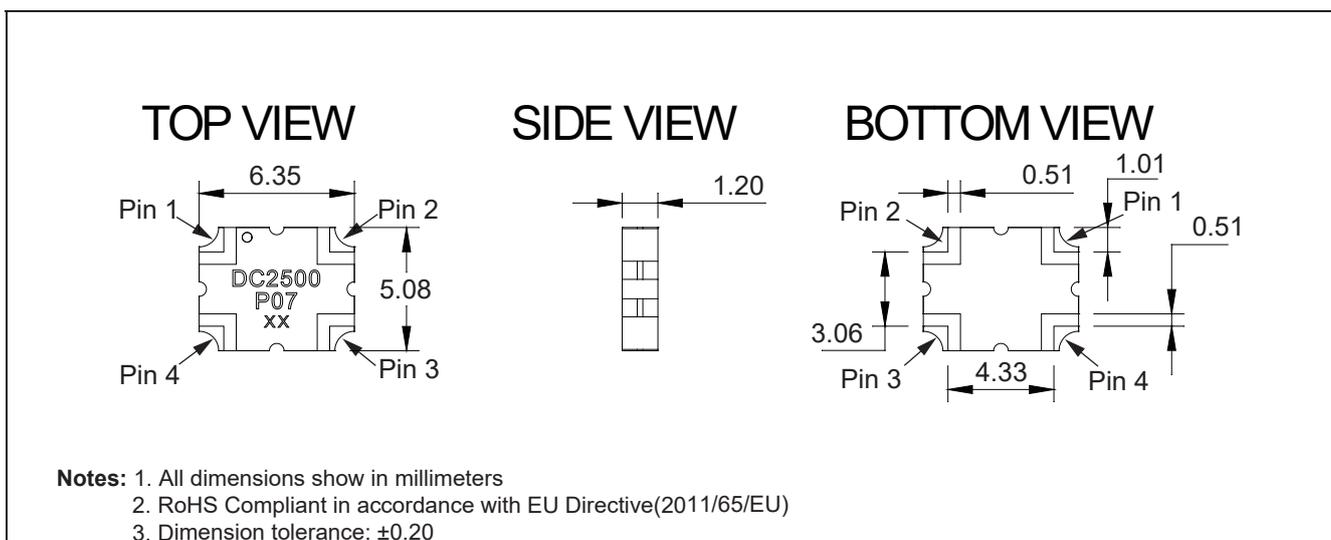

Directional Coupler Pin Configuration


The DC2500P07 has an orientation marker to denote Pin 1. Once port one has been identified the other ports are known automatically. Please see the chart below for clarification:

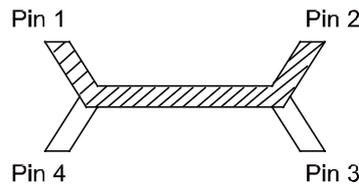


Pin 1	Pin 2	Pin 3	Pin 4
Input	Transmission	Isolate	Coupling
Transmission	Input	Coupling	Isolate

Typical Performance Data (@25°C)

Frequency (MHz)	Coupling (dB)	Transmission (dB)	Insertion Loss (dB)	Directivity (dB)	Return Loss(dB)			
					S11	S22	S33	S44
1700	-6.85	-1.16	-0.13	-25.89	-30.59	-29.70	-28.59	-30.25
1795	-6.65	-1.21	-0.12	-26.16	-28.44	-28.21	-28.19	-29.73
1890	-6.46	-1.28	-0.13	-26.92	-27.57	-28.09	-28.79	-30.41
1985	-6.33	-1.34	-0.15	-28.35	-27.22	-27.44	-29.54	-30.55
2080	-6.21	-1.37	-0.14	-29.34	-27.04	-27.66	-30.33	-32.77
2175	-6.10	-1.40	-0.13	-31.67	-27.61	-28.08	-31.75	-36.92
2270	-6.04	-1.43	-0.14	-33.19	-28.66	-29.10	-33.27	-40.22
2365	-5.99	-1.47	-0.15	-34.29	-31.20	-29.81	-34.42	-42.64
2460	-5.95	-1.44	-0.12	-32.22	-32.50	-30.82	-34.18	-48.76
2555	-5.92	-1.44	-0.12	-28.82	-34.43	-30.46	-33.30	-47.41
2650	-5.89	-1.45	-0.11	-26.08	-37.15	-29.59	-33.69	-40.44
2745	-5.95	-1.44	-0.12	-23.65	-38.18	-28.29	-31.42	-36.12
2840	-5.99	-1.43	-0.13	-21.81	-36.52	-27.22	-29.91	-32.43
2935	-6.05	-1.42	-0.14	-20.01	-33.46	-26.29	-27.54	-28.73
3030	-6.15	-1.41	-0.15	-18.30	-30.58	-24.95	-25.56	-25.38
3125	-6.28	-1.39	-0.17	-17.06	-27.44	-23.24	-23.14	-22.71
3220	-6.45	-1.38	-0.20	-15.75	-24.74	-21.57	-21.18	-20.58
3315	-6.66	-1.34	-0.22	-14.67	-21.73	-19.76	-18.82	-18.26
3410	-6.91	-1.31	-0.26	-13.64	-19.21	-17.99	-16.76	-16.30
3505	-7.27	-1.31	-0.33	-12.51	-17.05	-16.26	-15.11	-14.64
3600	-7.63	-1.28	-0.38	-11.62	-15.28	-14.73	-13.59	-13.18

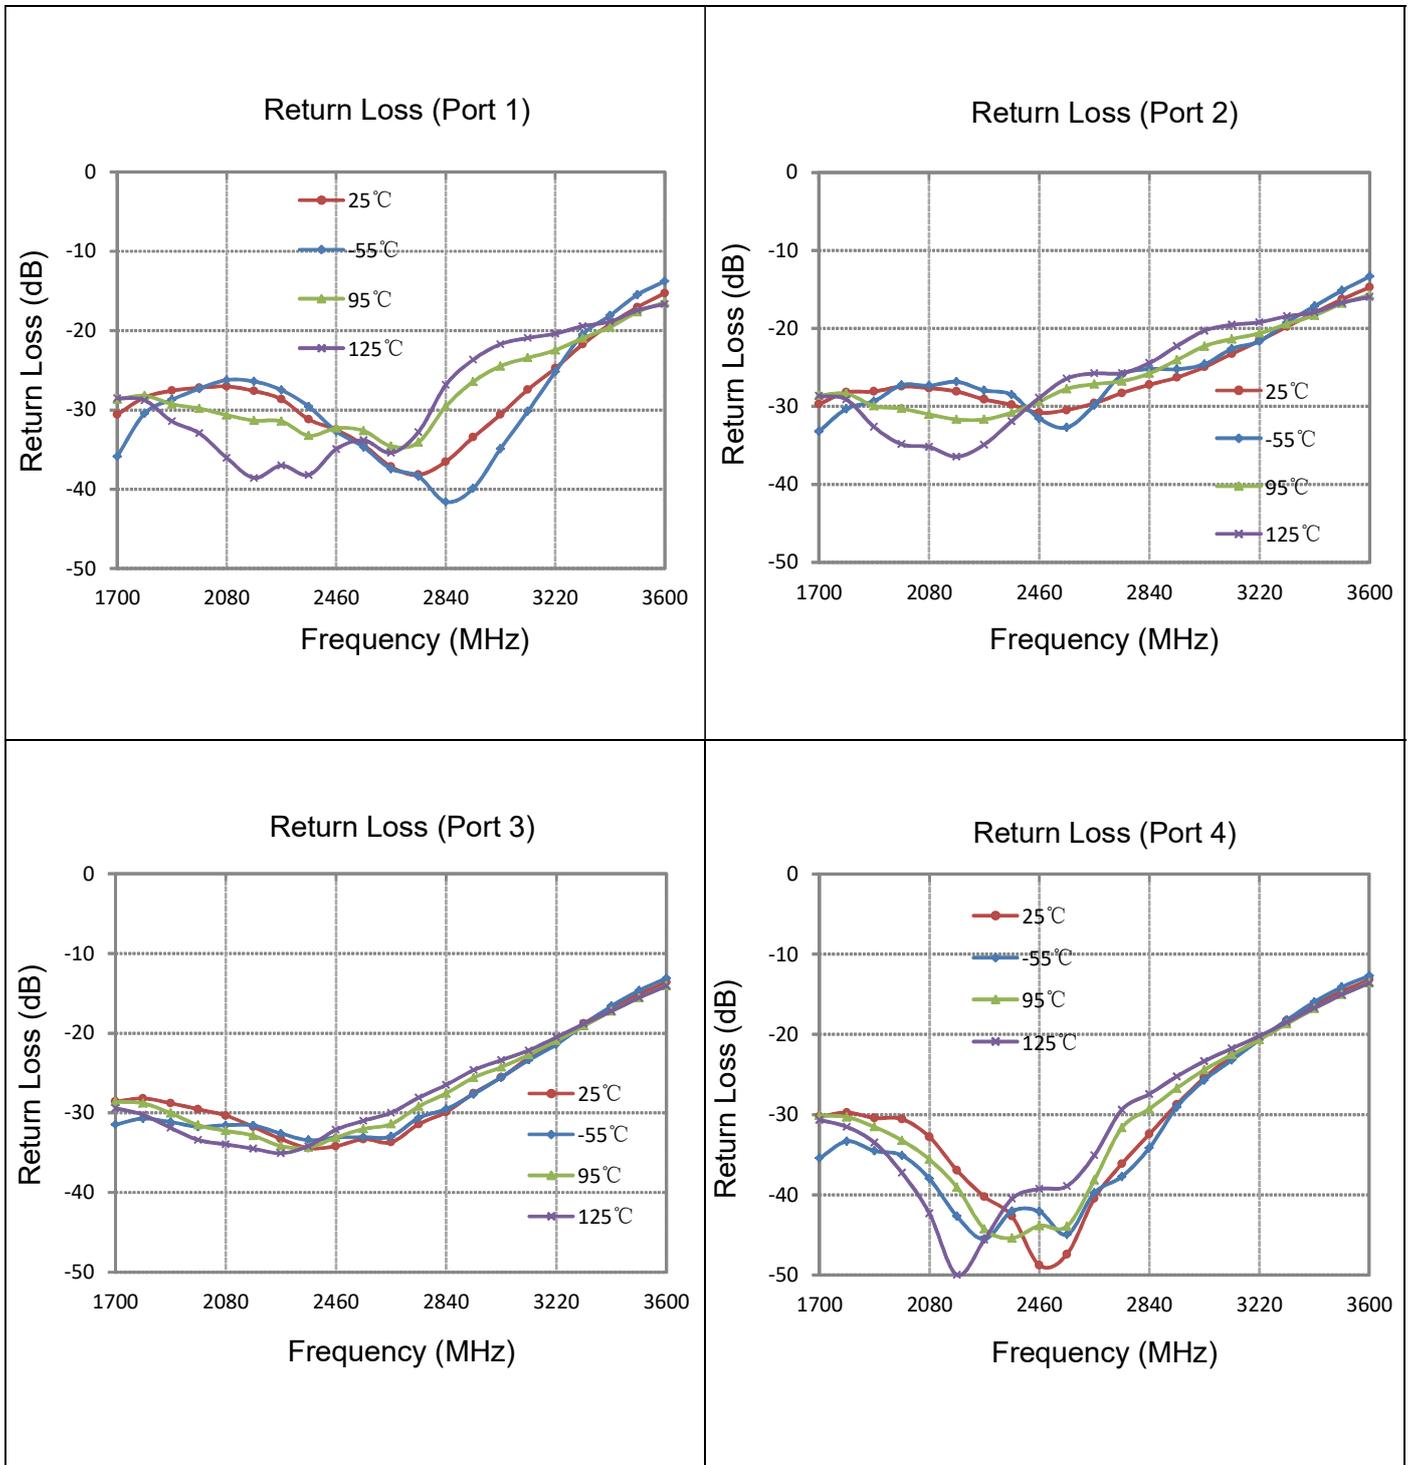Typical Performance (-55°C, 25°C, 95°C & 125°C: 1700-3600 MHz)

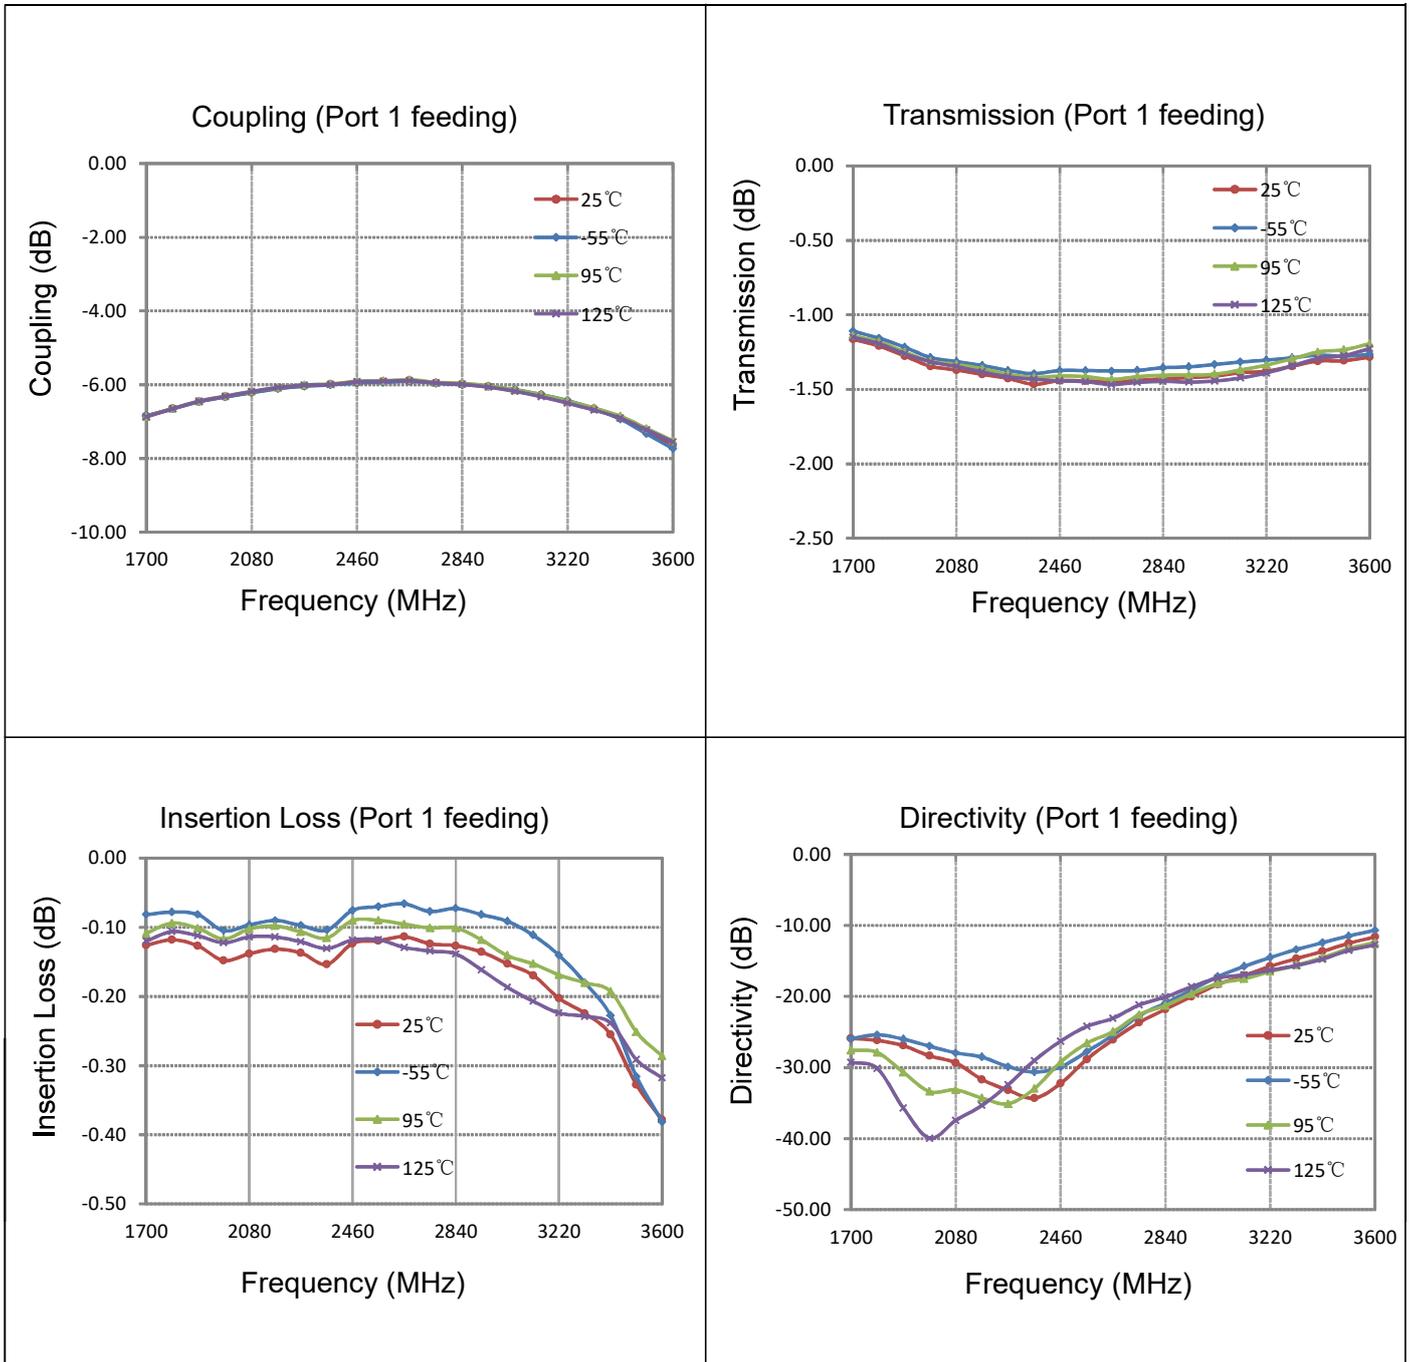
Typical Performance (-55°C, 25°C, 95°C & 125°C: 1700-3600 MHz)


Description of Measured Specifications

Parameter	Description
VSWR	Voltage standing wave ratio, the impedance match to 50Ω , the ideal value is 1:1.
Return Loss	Loss of signal power resulting from the reflection caused by discontinuity of transmission line.
Insertion Loss	The input power divided by sum of power at the coupling port & transmission port.
Coupling	The input power divided by the power at coupling port.
Transmission	The input power divided by the power at transmission port.
Directivity	The power at the coupling port divided by the power at the isolated.
Phase Balance	The difference between coupling port and transmission port.


Test Method

1. Calibrating your vector network analyzer.
2. Connect the VNA 4 Port to DUT respectively.
3. Measure the data of coupling through port 1 to port 4(S41).
4. Measure the data of transmission through port 1 to port 3(S31).
5. Measure the data of isolation through port 1 to port 2(S21).
6. Measure the data of return loss port 1, port 2, port 3 & port 4.
7. According to the above data to calculate insertion loss, directivity and phase balance.


Note:

1. When calculating insertion loss at room temperature, demo board loss should be removed from both coupling & transmission data. Please refer to the below table for demo board loss :

Frequency Range(MHz)	Demo Board Loss (dB) @25°C
470-860	0.07
800-1000	0.10
1200-1700	0.15
1700-2000	0.15
2000-2300	0.20
2300-2700	0.25

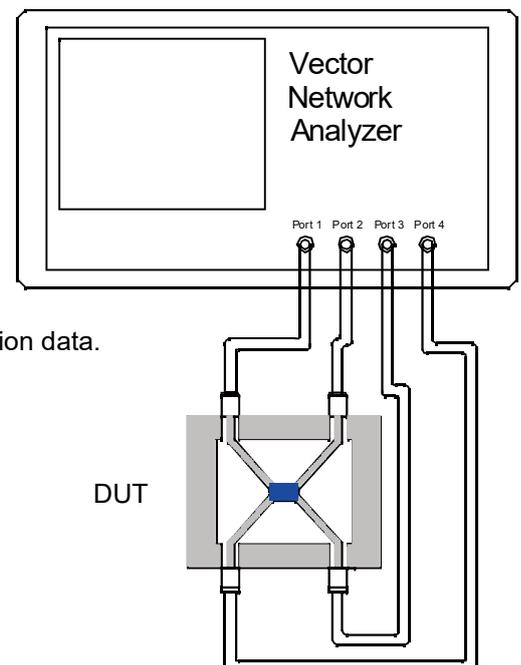


Recommended PCB Layout

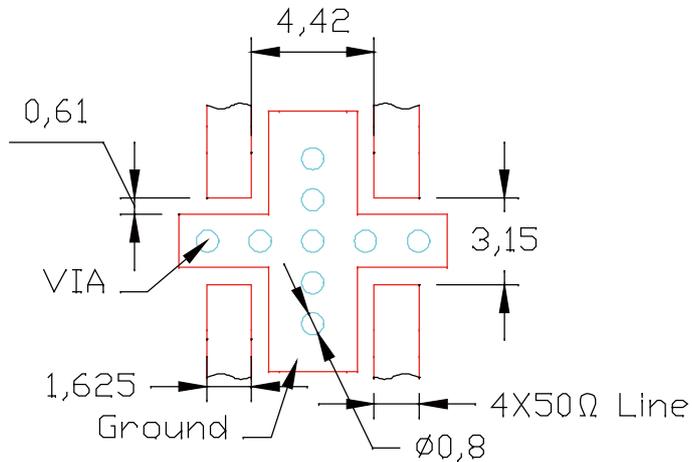


NOTE:

1. 50Ω line width is shown above designing from RO4350B dielectric thickness 0.762mm; copper 1 OZ
2. Bottom side of the PCB is continuous ground plane.
3. All dimensions shown in mm.


Reflow Profile

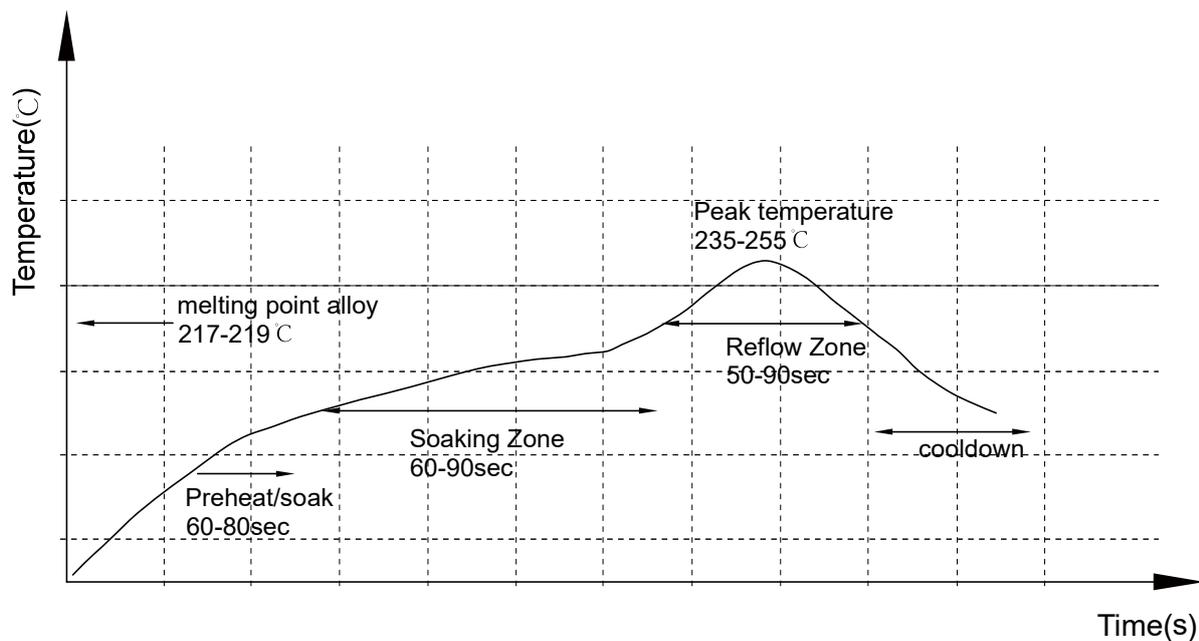

Reliability Test Flow


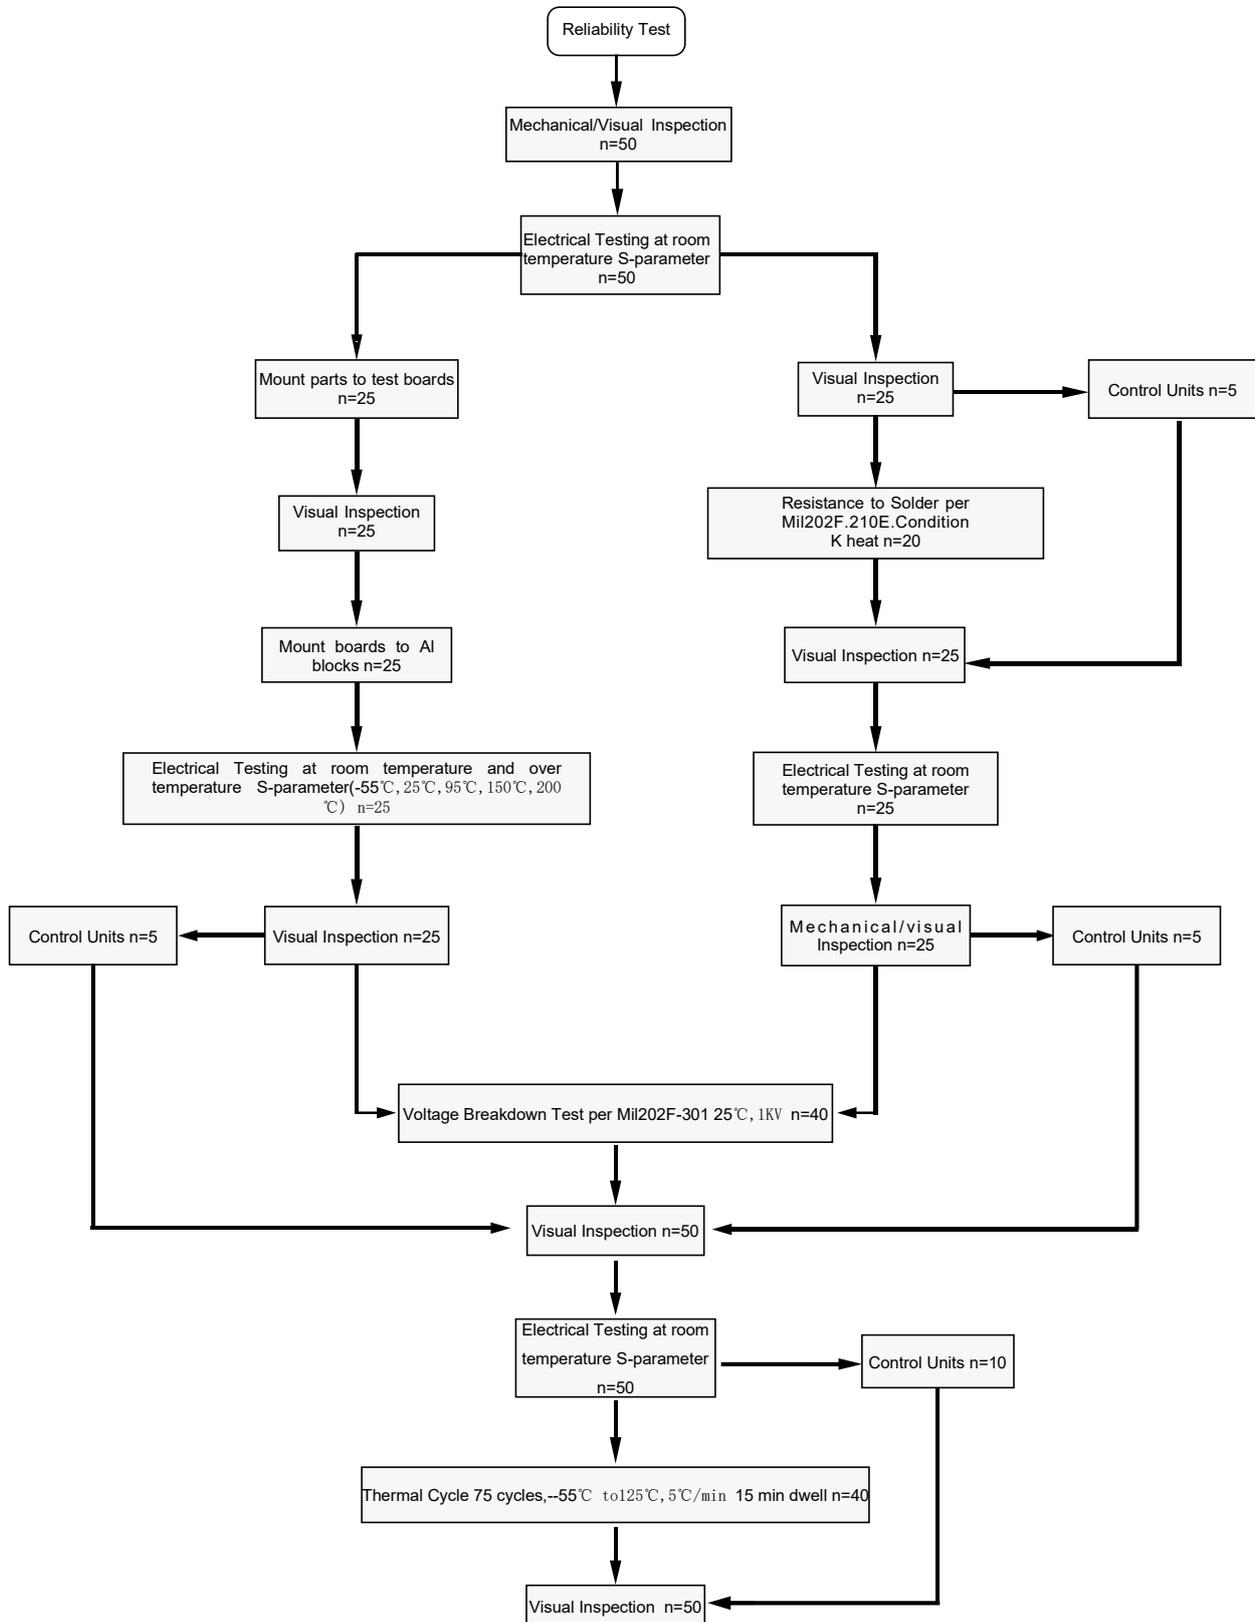


Reliability Test Flow

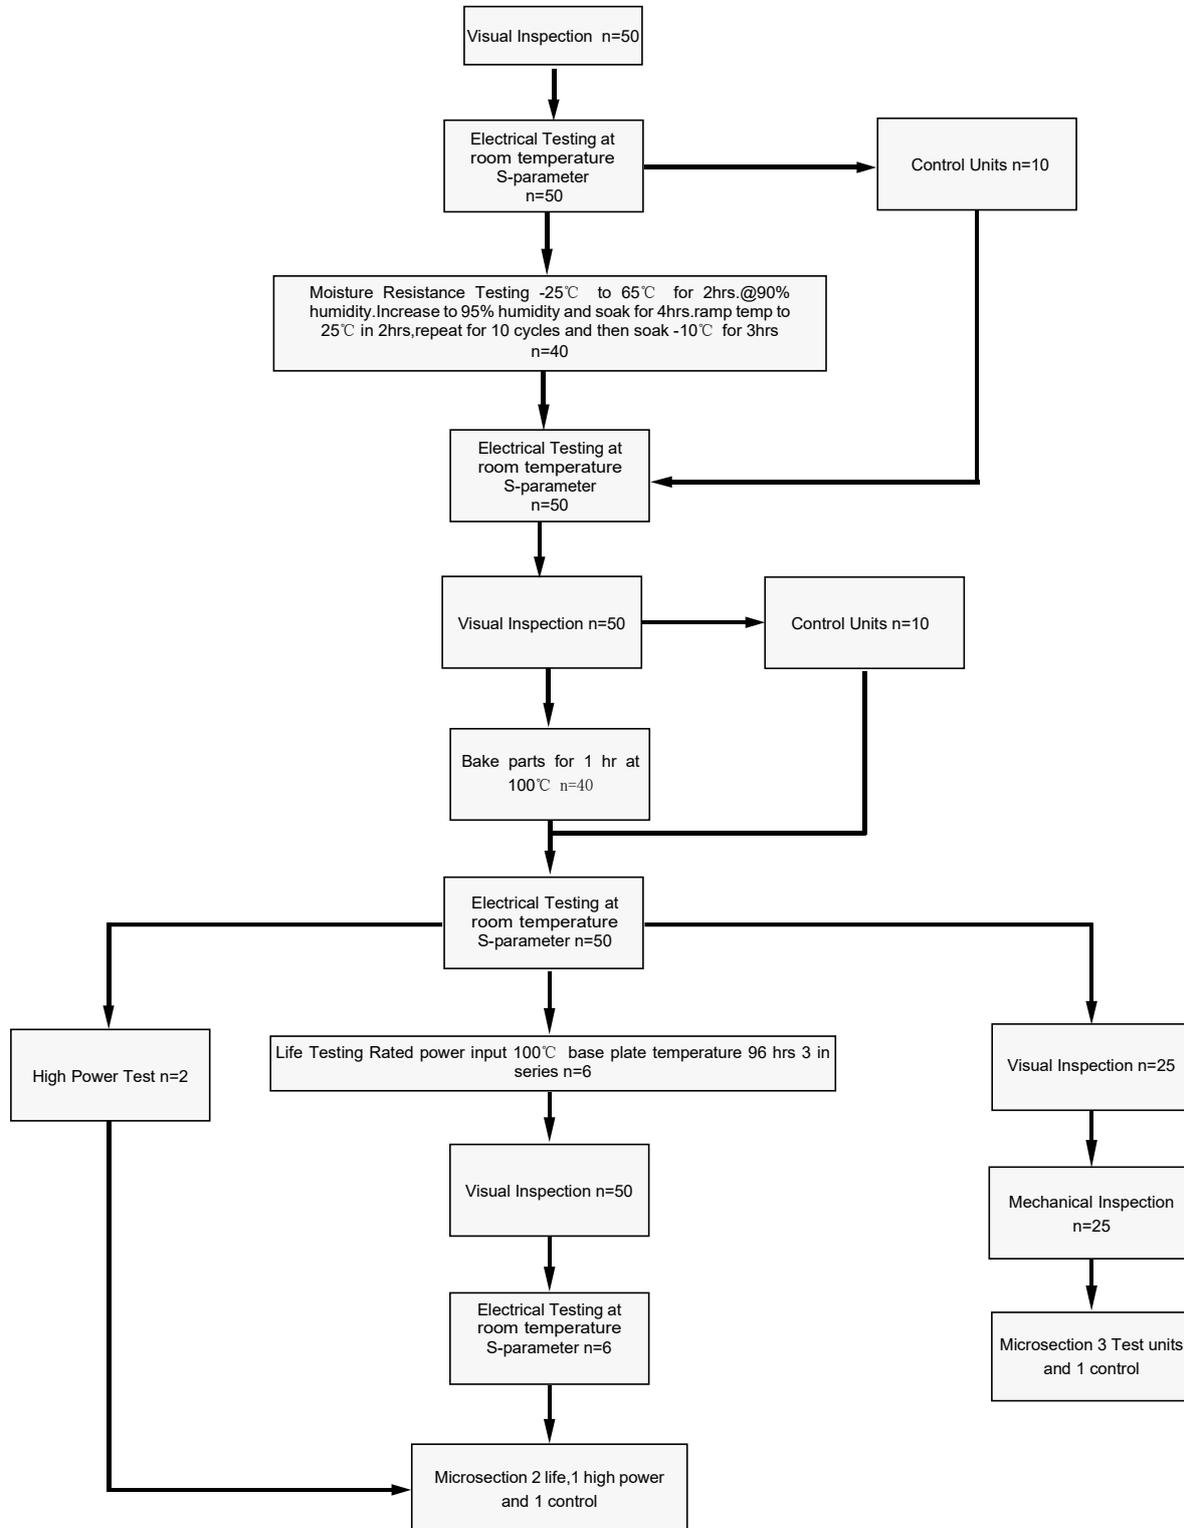


Tape and Reel Drawing

 Feeding Direction

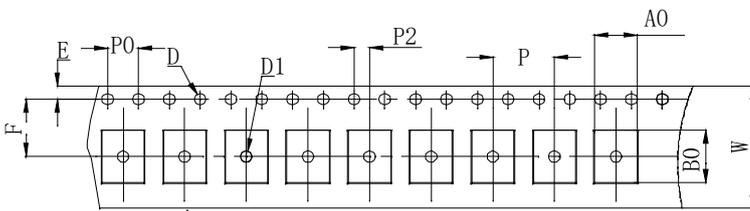SECTION A-A




SECTION B-B

Notice:

- A. 10 Sprocket hole pitch cumulative tolerance is 0.2mm.
- B. Carrier camber shall be not more than 1mm per 100mm through a length of 250mm.
- C. All dimensions meet EIA-418-B requirements.
- D. A0 & B0 measured as indicated.
- E. K0 measured from a place on the inside bottom of the pocket to top surface of carrier.
- F. Material: PE 100
- G. Thickness: 0.30±0.05mm
- H. 1000 units (maximum) / T&R

ITEM	W	A0	B0	K0	P	F	E	D	D1	P0	P2	T	7"
DIM(mm)	16.0	5.50	6.80	1.90	8.00	7.50	1.75	1.50	1.50	4.00	2.00	0.30	P/R
TOLE	+0.30 -0.30	+0.10 -0.10	+0.10 -0.00	+0.10 -0.10	+0.10 -0.10	+0.05 -0.05	1000pcs						

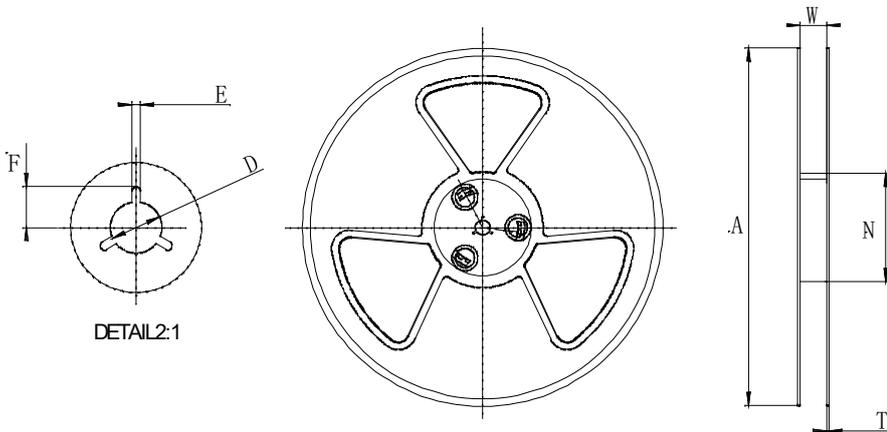

Symbol	Dimensions	
	(mm)	(inch)
W	16.5±0.4	0.65
A	177±0.5	7.0
N	63±0.3	2.48
T	1.8±0.2	0.071
E	2.1±0.3	0.083
F	10.75±0.3	0.423
D	13.5+0.5/-0.2	0.531

