

Fixed Attenuator Chip

- ◆ DC to 6 GHz
- ◆ 5 dB
- ◆ 2W(Al_2O_3) 或 5W(BeO)

Features

- High attenuation accuracy
- Small VSWR
- Laser trimmed
- Low cost-high performance

Model No. Description

FACXXXX



X-Power:(no code)=2W or (P)=5W

XX- attenuation: **dB.

XX- frequency range 06: DC to 6GHz
 10: DC to 10GHz
 12: DC to 12.4GHz
 18: DC to 18GHz
 26: DC to 26.5GHz.

Characteristic

For example the testing curves of FAC0605*
 FAC0605*

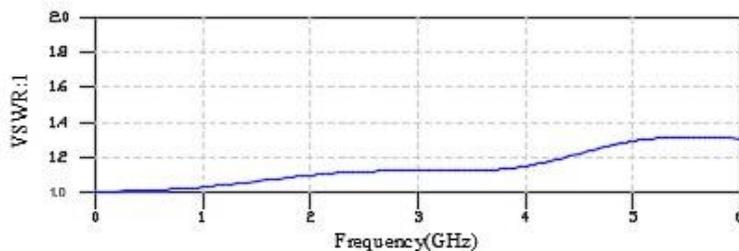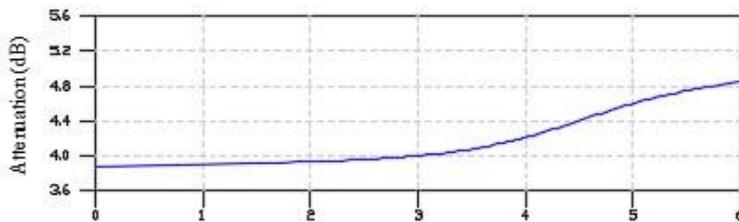


Specifications


Frequency Range	DC to 6 GHz
Attenuation	5 dB
Attenuation Accuracy (Typical.)	±0.35 dB DC to 2 GHz + 0.5 dB 2 to 4 GHz + 1.0 dB 4 to 6 GHz
Nominal Impedance	50 Ohm
Rated Input Power	2W(Al_2O_3) or 5W(BeO)
Operating Temperature	-55 °C to +150 °C

FREQ. RANGE (GHz)	VSWR(:1) Typical
DC to 2	1.20
2 to 4	1.30
4 to 6	1.35

Package Outlines

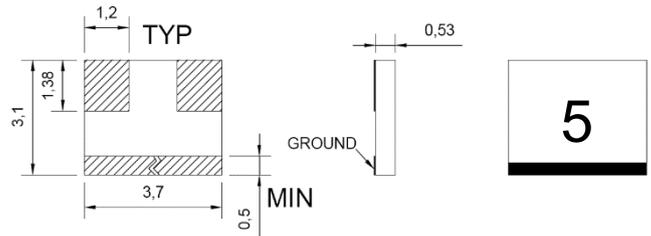


FAC0605 2W(Al_2O_3) 公差±0.1

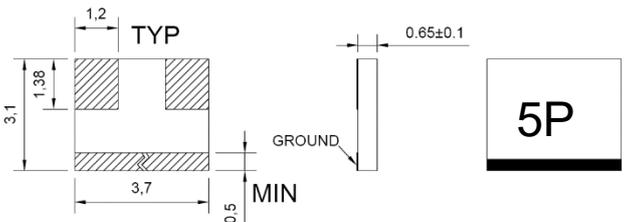

FAC0605P 5W(BeO) 公差±0.1

Recommended Layout



Note: all dimensions shown in mm