

Fixed Attenuator Chip

- ◆ DC to 8 GHz
- ◆ 1 dB
- ◆ 100mW

Features

- High attenuation accuracy
- Small VSWR
- Ceramic chip: 96% alumina
- Laser trimmed
- Low cost-high performance

Model No. Description

FACXXXX

XX- attenuation: **dB.

- XX- frequency range
- 06: DC to 6GHz
 - 10: DC to 10GHz
 - 12: DC to 12.4GHz
 - 18: DC to 18GHz
 - 26: DC to 26.5GHz.

Specifications


Frequency Range	DC to 8 GHz
Attenuation	1 dB
Attenuation Accuracy (Max.)	±0.35dB DC to 4GHz +0.45dB 4 to 6GHz +0.65dB 6 to 8GHz

Nominal Impedance	50 Ohm
Rated Input Power	100mW
Operating Temperature	-55 °C to +150 °C


FREQ. RANGE (GHz)	VSWR(:1) Max
DC to 4	1.15
4 to 6	1.20
6 to 8	1.25

Characteristic


For example the testing curves of FAC0801

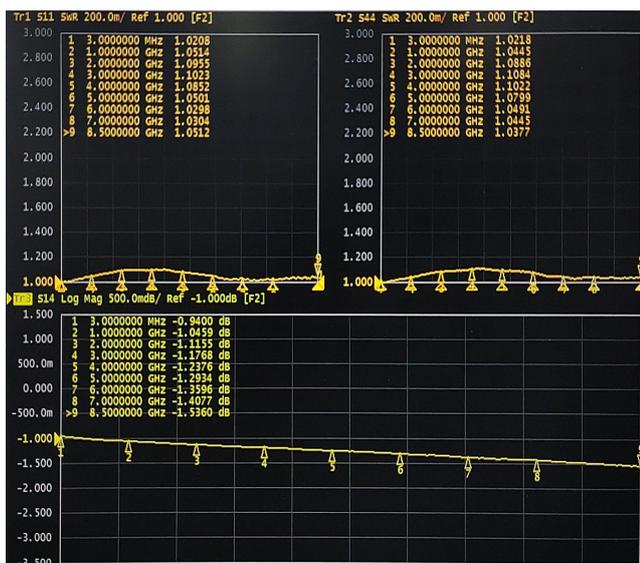

Package Outlines

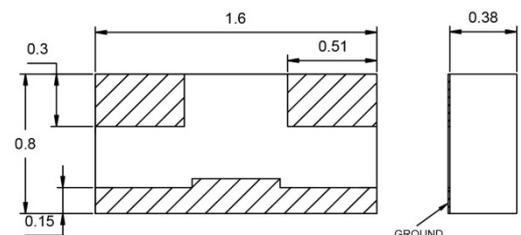

Recommended Layout

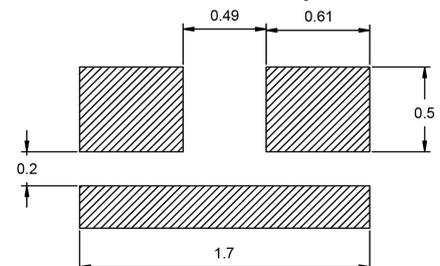

Note: all dimensions shown in mm