

### Manual Step Attenuator

- ◆ DC to 4GHz
- ◆ 0 to 35dB in 1dB Step
- ◆ 2 Watt
- ◆ Connector Type:SMA,N,TNC,F,BNC etc.□ available.





### Features

- Using advanced microstrip technology, ultra-small size
- Attenuation values are adjustable in a power-on state, no sudden big reflection.  
It adopts an innovative technology, and thus it eliminates sudden big reflection in attenuators when attenuation is being adjusted, preventing the preliminary RF circuit from being burnt, and keeping the system stable
- Step values: 1dB, 2dB, 4dB, 8dB,10dB,10dB
- 36 attenuation values
- High attenuation accuracy, low insertion loss
- High adjustment accuracy
- Low cost – High Performance
- Adjusting the transmitting (receiving) distance of RF signal precisely. Adjusting accuracy is limited to 5cm.
- Switch repeatability avg.> 10000 operations (5000 cycles) per switch.
- PC(Polycarbonate) Switch, operating temperature of 120°C is available.
- Attenuation values are adjustable in a power-on state, test data can be read continuously, no interruption.

### Characteristic

For example the testing curves of VAS063501S22 of 30dB

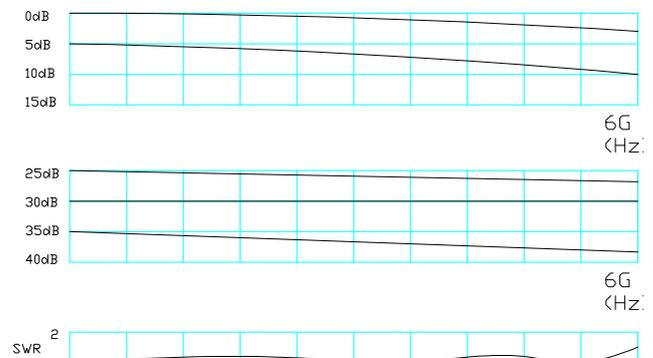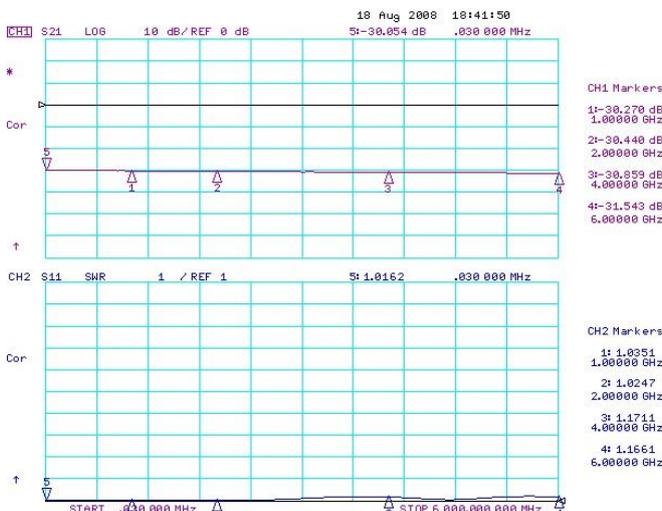

### Specifications

<b>Frequency Range</b>	DC to 4GHz
<b>Attenuation</b>	0 to 35dB
<b>Step Value</b>	1dB
<b>Insertion loss at 0dB (typ.)</b>	0.50dB at 1 GHz 0.90dB at 2 GHz 1.30dB at 3 GHz 1.70dB at 4GHz
<b>Attenuation Accuracy (typ.)</b>	0 to +0.60dB at 1GHz 0 to +1.30dB at 2GHz 0 to +2.00dB at 3GHz 0 to +3.00dB at 4GHz
<b>Nominal Impedance</b>	50 Ohm
<b>Average Power</b>	2 Watt
<b>Operating Temperature</b>	-40°C to +85°C

Freq. Range (GHz)	VSWR(:1)	
	Typ.	Max.
DC to 3	1.10	1.35
3 to 4	1.25	1.45

### Model No. Description

VAS        \*\*                          \*\*                          \*\*                          \*                          \*                          \*    
    Type                      Attenuation Range                      Step Value                      Connector Type                      Max. Power                      Connector Option

**VAS:** Step Variable Attenuator

**Type:** 06 represents type number

**Attenuation Range:** Maximum attenuation.

**Connector Type:** S and N available. S is SMA and N is N type connector.

**Max. Power:** 2 and 5 are available, currently 2W and 5W are available.


**Connector Options:**

Options	IO
1	Female/Female
2	Male/Female
3	Male/Male

**Connector Position:** "A" represents back connectors, without "A" represents left and right connectors.


### Package Outlines

#### SMA Connector Unit : mm ( inch )

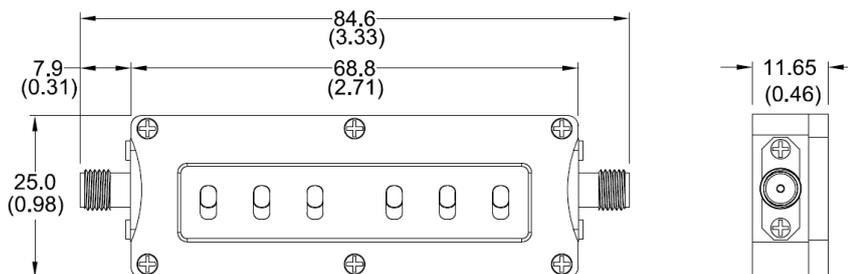

Package type: S21, Net weight: 37g

#### N-type Connector

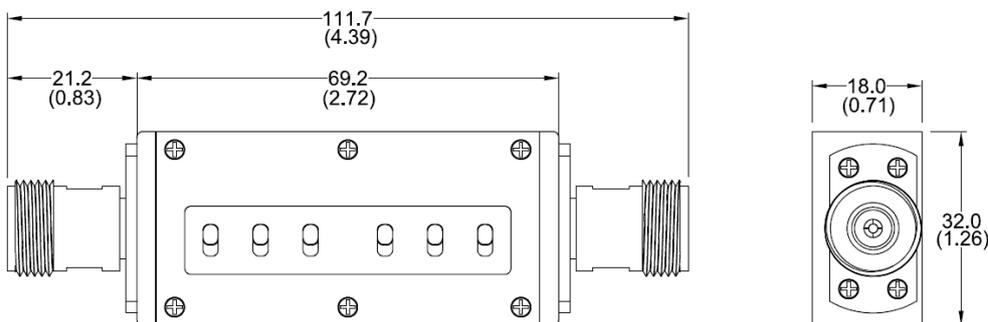

Package type: N21, Net weight: 144g


**NOTE:**

1. ALL dimensions shown in mm (tolerance: +/-0.2mm) unless stated otherwise
2. RoHS Compliant in accordance with EU Directive (2011/65/EU)


**Mounting Instructions:**

This product is panel-mountable via screws.


- Four mounting holes on the product plate. Refer to Fig2, Fig6.
- H represents the thickness of panel. Refer to Fig3, Fig4.
- Recommended length of the screw is 3mm+H. Refer to Fig5.

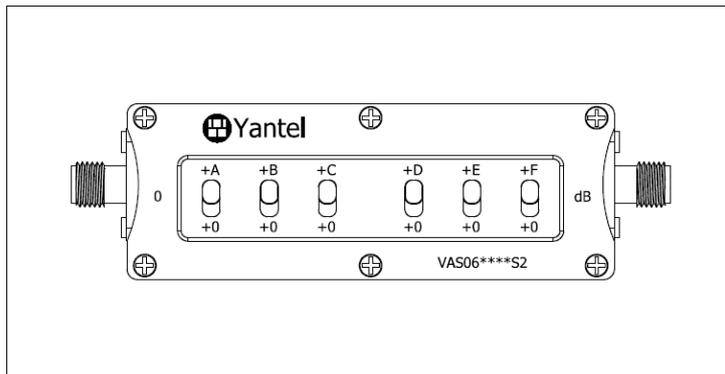


**Front View Fig 2**

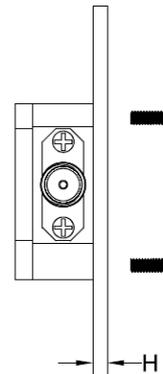


**Lateral View Fig 3**

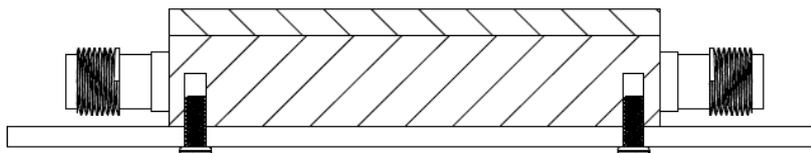

**Sectional View Fig 4**

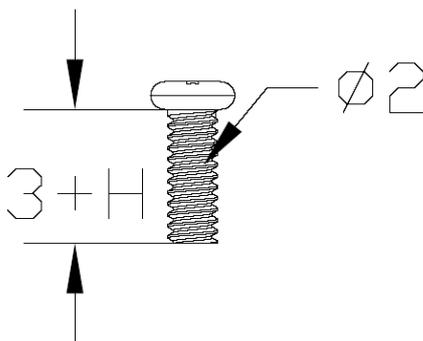

**Recommended length of the screw Fig 5**

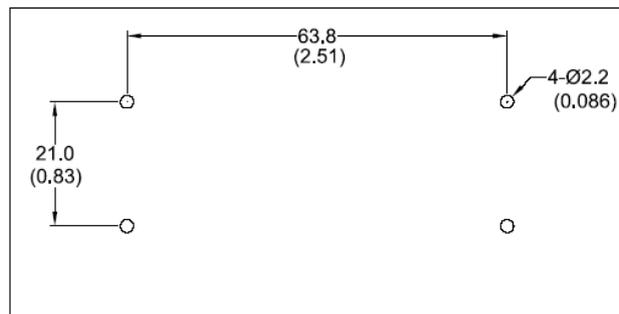


**Mounting holes on user's panel Fig 6**

**Note:**

Attempt to disassemble the product can damage it and void your warranty. In case of any malfunction, please contact your local representative, distributor or the factory immediately.

---

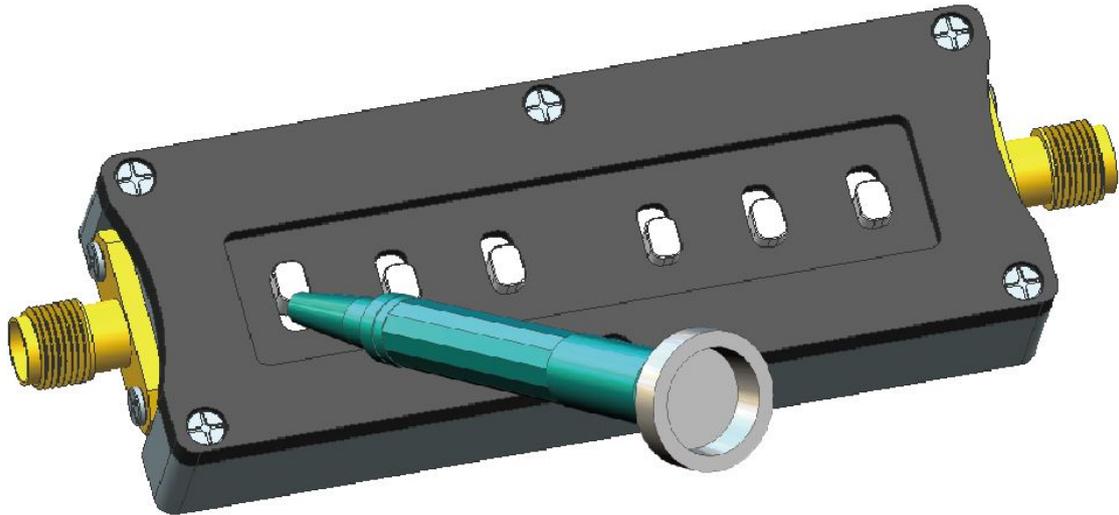**Attention**

It is much easier to adjust the switch by tools like plastic screw driver.