

## Manual Step Attenuator

- ◆ DC to 3.5GHz
- ◆ 0 to 72dB in 3dB Step
- ◆ 2 Watt
- ◆ Connector Type:SMA,N,TNC,F,BNC etc. available.




### Features

- Using advanced microstrip technology, ultra-small size
- Attenuation values are adjustable in a power-on state, no sudden big reflection.  
It adopts an innovative technology, and thus it eliminates sudden big reflection in attenuators when attenuation is being adjusted, preventing the preliminary RF circuit from being burnt, and keeping the system stable
- Step values available are 3dB, 6dB, 9dB, 9dB, 9dB, 9dB, 9dB, 9dB, 9dB
- 25 attenuation values are available
- High attenuation accuracy, low insertion loss
- High adjustment accuracy
- Low cost – High Performance
- Adjusting the transmitting (receiving) distance of RF signal precisely. Adjusting accuracy is limited to 5cm.
- Switch repeatability avg.> 10000 operations (5000 cycles) per switch.
- PC(Polycarbonate) Switch, operating temperature of 120°C is available.
- Attenuation values are adjustable in a power-on state, test data can be read continuously, no interruption.

### Characteristic


For example the testing curves of VAS067203S22 of 21dB

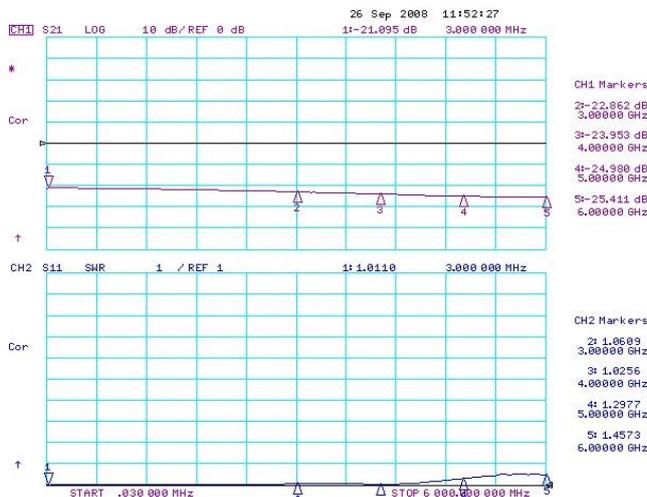

### Specifications

<b>Frequency Range</b>	DC to 3.5GHz
<b>Attenuation</b>	0 to 72dB
<b>Step Value</b>	3dB
<b>Insertion loss at 0dB (typ.)</b>	
SMA connector	0.50dB at 1 GHz 1.20dB at 2 GHz 2.50dB at 3.5 GHz
N type connector	0.50dB at 1 GHz 1.20dB at 2 GHz 2.50dB at 3.5 GHz
<b>Attenuation Accuracy (typ.)</b>	
SMA connector	0 to +0.7dB at 1GHz 0 to +1.7dB at 2GHz 0 to +3.7dB at 3.5GHz
N type connector	0 to +0.7dB at 1GHz 0 to +1.7dB at 2GHz 0 to +3.7dB at 3.5GHz
<b>Nominal Impedance</b>	50 Ohm
<b>Average Power</b>	2 Watt
<b>Operating Temperature</b>	-40°C to +85°C

Freq. Range (GHz)	Connector Type	VSWR(:1)	
		Typ.	Max.
DC to 3.5	SMA	1.20	1.35
	N Type	1.20	1.35

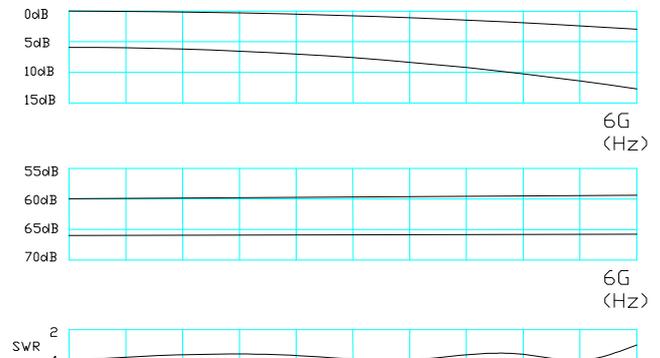

Yantel Corporation

### Model No. Description

VAS                    \*\*                    \*\*                    \*\*                    \*                    \*                    \*  
                           Type                    Attenuation Range    Step Value           Connector Type        Max. Power           Connector Option

**VAS:** Step Variable Attenuator

**Type:** 06 represents type number

**Attenuation Range:** Maximum attenuation.

**Connector Type:** S and N available. S is SMA and N is N type connector.

**Max. Power:** 2 and 5 are available, currently 2W and 5W are available.


**Connector Options:**

Options	IO
1	Female/Female
2	Male/Female
3	Male/Male

**Connector Position:** "A" represents back connectors, without "A" represents left and right connectors.


### Package Outlines

**SMA Connector** Unit : mm ( inch )

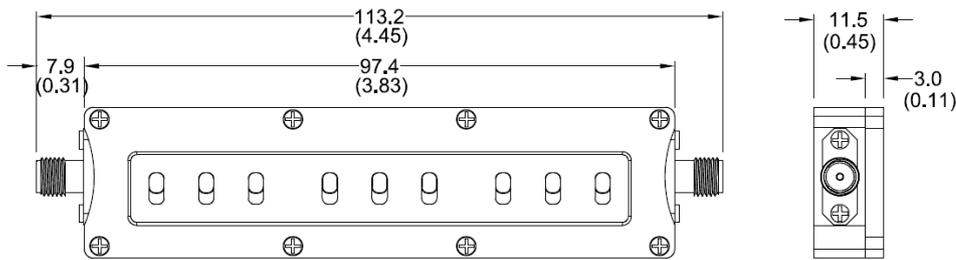

Package type: S22, Net weight: 50.2g

### N-type Connector

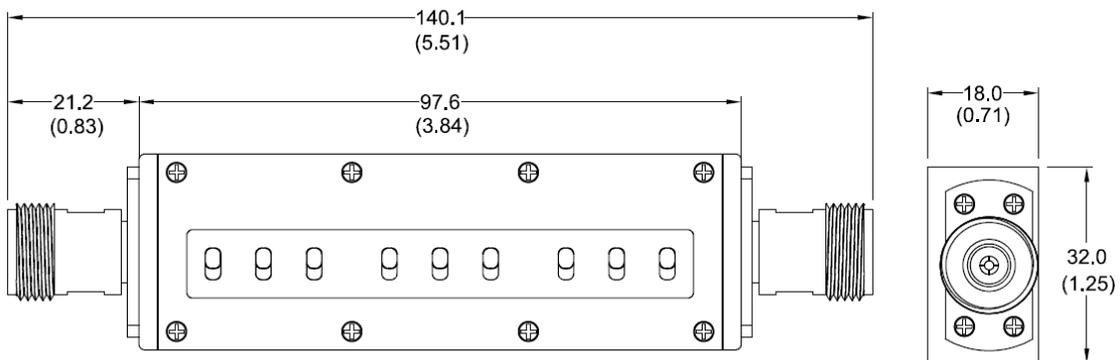

Package type: N22, Net weight: 195g


**NOTE:**

1. ALL dimensions shown in mm(tolerance: +/-0.2mm) unless stated otherwise
2. RoHS Compliant in accordance with EU Directive(2011/65/EU)


**Mounting Instructions:**

This product is panel-mountable via screws.


- Four mounting holes on the product plate. Refer to Fig2, Fig6.
- H represents the thickness of panel. Refer to Fig3, Fig4.
- Recommended length of the screw is  $3\text{mm}+H$ . Refer to Fig5.

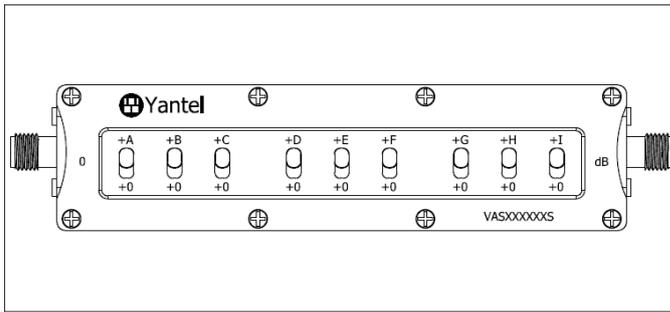


**Front View Fig 2**




**Lateral View Fig 3**

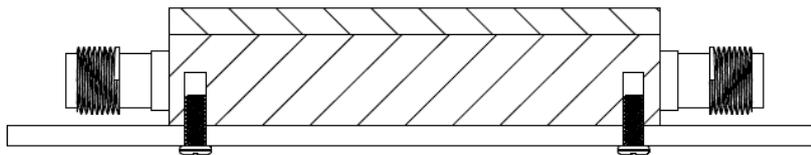

**Sectional View Fig 4**

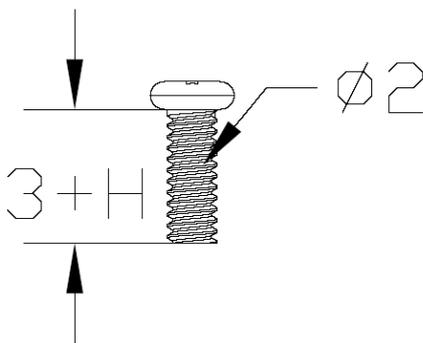

**Recommended length of the screw Fig 5**

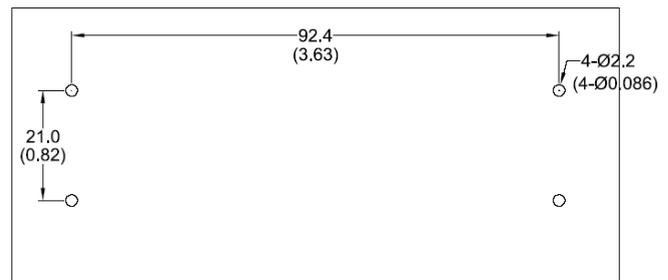


**Mounting holes on user's panel Fig 6**

**Note:**

Attempt to disassemble the product can damage it and void your warranty. In case of any malfunction, please contact your local representative, distributor or the factory immediately.

---

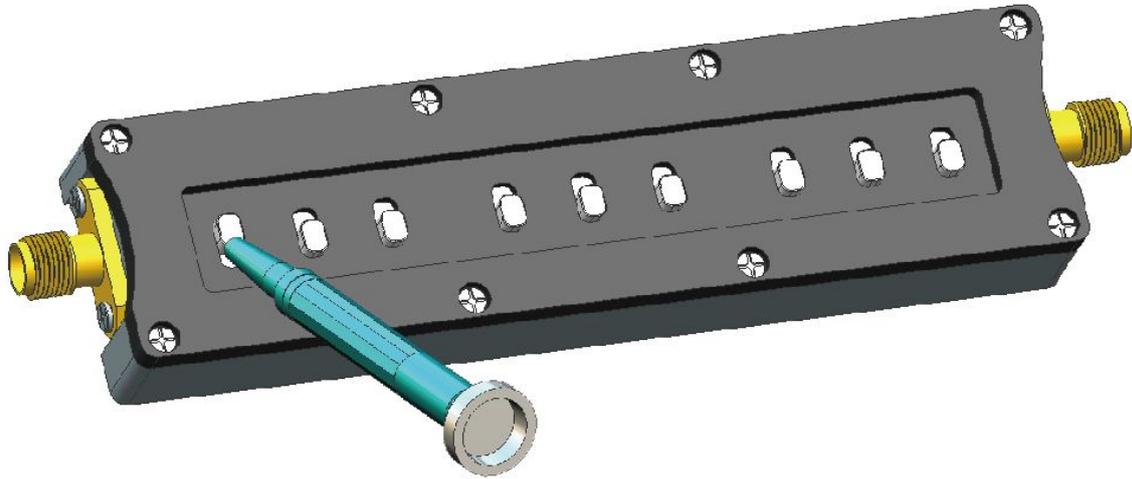**Attention**

It is much easier to adjust the switch by tools like plastic screw driver.