

## Fixed Attenuator Chip

- ◆ DC to 12.4 GHz
- ◆ 1 dB
- ◆ 300mW

### Features

- High attenuation accuracy
- Small VSWR
- Ceramic chip: 96% alumina
- Laser trimmed
- Low cost-high performance

### Model No. Description

**FACXXXXX**

- X- \*:A,Planar \*:B, Triple wrap
- XX- attenuation: \*\*dB.
- XX- frequency range 06: DC to 6GHz
- 10: DC to 10GHz
- 12: DC to 12.4GHz
- 18: DC to 18GHz
- 26: DC to 26.5GHz.


### Specifications

Frequency Range	DC to 12.4 GHz
Attenuation	1 dB
Attenuation Accuracy (Typical.)	±0.3 dB DC to 3 GHz + 0.5 dB 3 to 6 GHz + 0.5 dB 6 to 8.5 GHz + 1.0 dB 8.5 to 12.4 GHz
Nominal Impedance	50 Ohm
Rated Input Power	300mW
Operating Temperature	-55 °C to +150 °C

FREQ. RANGE (GHz)	VSWR(:1) MAX
DC to 3	1.10
3 to 6	1.15
6 to 8.5	1.20
8.5 to 12.4	1.45



### Characteristic

For example the testing curves of FAC1201

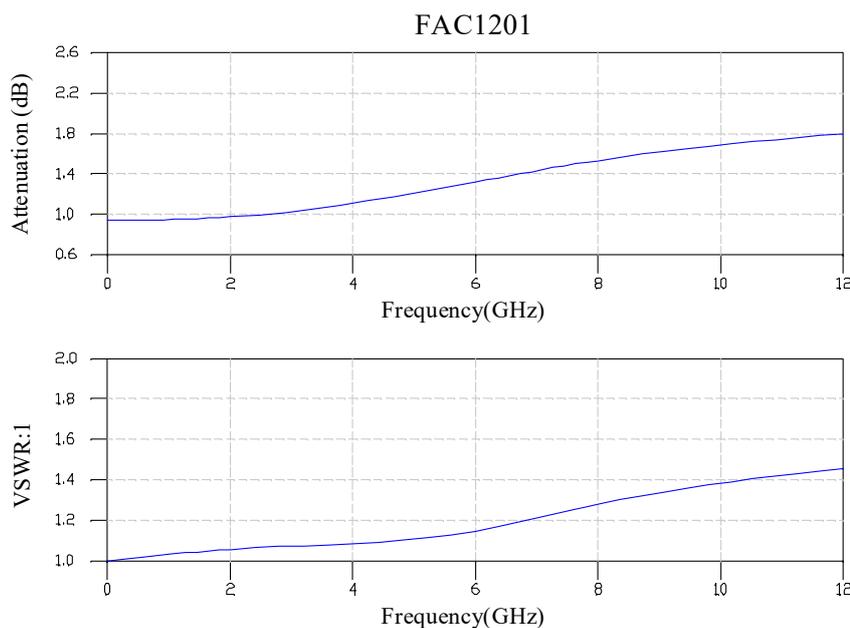

## Package Outlines

Unit:inch[mm]

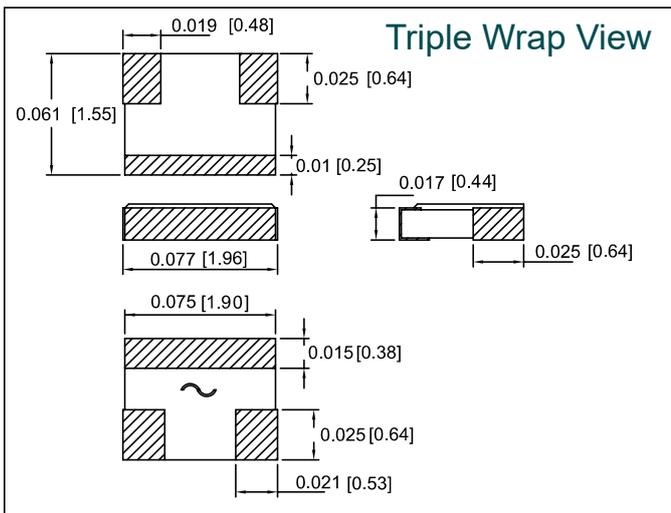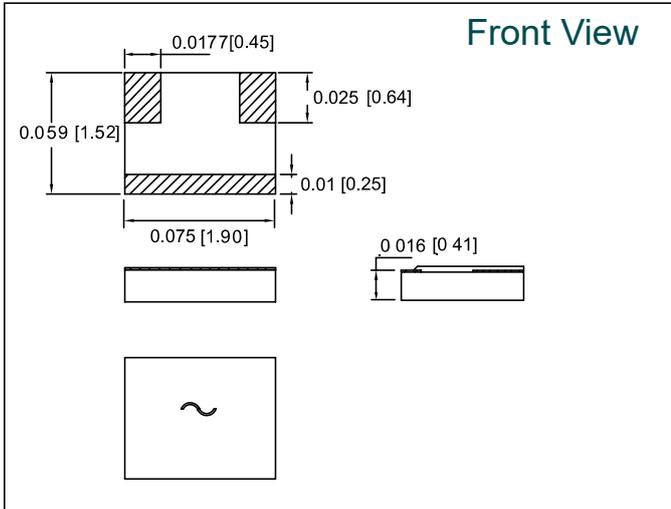

## Recommended Layout

Unit:inch[mm]

