


Fixed Attenuator Chip

- ◆ DC to 43.5GHz
- ◆ 1 dB and 2 dB
- ◆ 2 W



Features

- Adopting advance GaAs technology
- Excellent attenuation accuracy & phase balance
- High ESD level
- Low VSWR
- Die Package

Model No. Description

FACXXXXXX



- XX- attenuation: **dB.
- XX- attenuation: **dB.
- XX-frequency range 06: DC to 6GHz
- 10: DC to 10GHz
- 12: DC to 12.4GHz
- 18: DC to 18GHz
- 26: DC to 26.5GHz.
- 43: DC to 43.5GHz.

Specifications



Frequency Range	DC to 43.5GHz
Attenuation	1 dB and 2 dB
Nonimal Impeance	50 Ohm
Rated Input Power	2W@25°C 1W@85°C
Operating Temperature	-45 °C to +85 °C

Paramter	Freq.Range (GHz)	Typ. (1dB)	Freq.Range (GHz)	Typ. (2dB)
Attenuation (dB)	DC-5	1±0.10	DC-5	2±0.10
	5-15	1±0.10	5-15	2±0.10
	15-18	1±0.10	15-18	2±0.10
	18-26.5	1±0.15	18-26.5	2±0.20
	26.5-43.5	1±0.40	26.5-43.5	2±0.40
VSWR (:1)	DC-5	1.15	DC-5	1.15
	5-15	1.20	5-15	1.20
	15-18	1.20	15-18	1.20
	18-26.5	1.20	18-26.5	1.20
	26.5-43.5	1.30	26.5-43.5	1.20

Test Curve

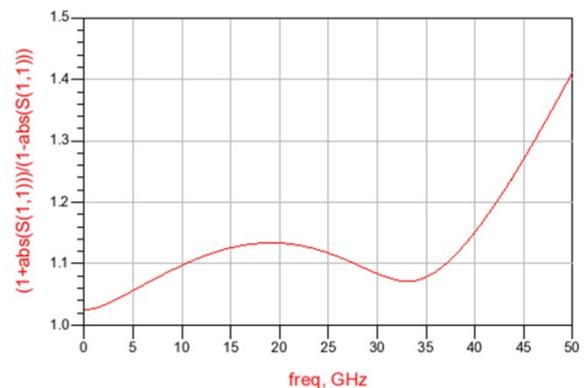
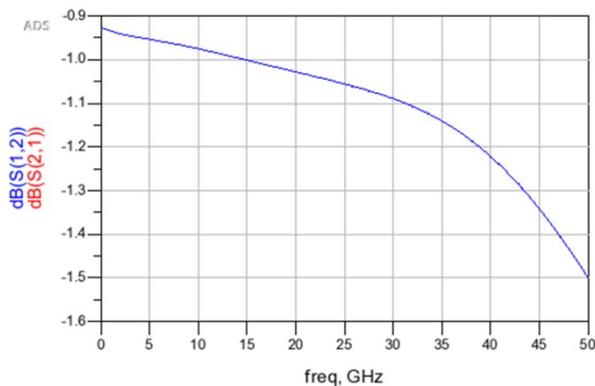


Test result of 1dB

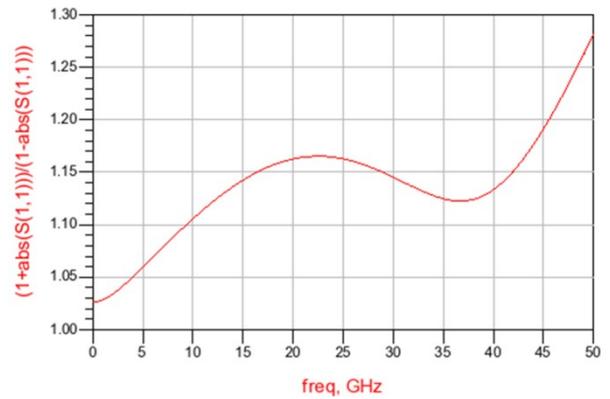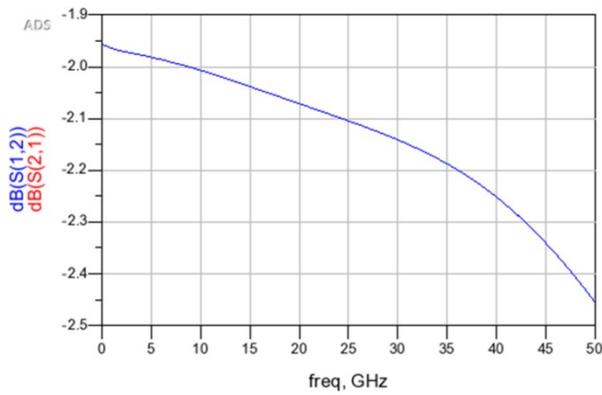


Test result of 2dB

Pin out

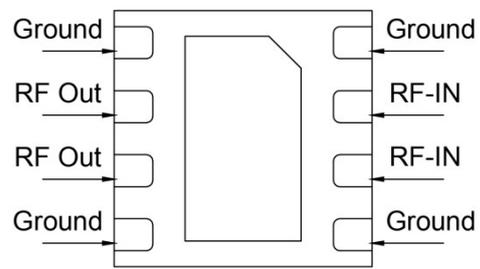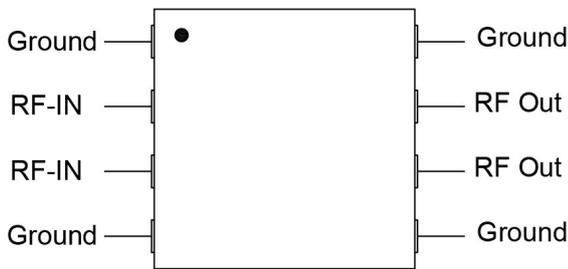

Land Pattern

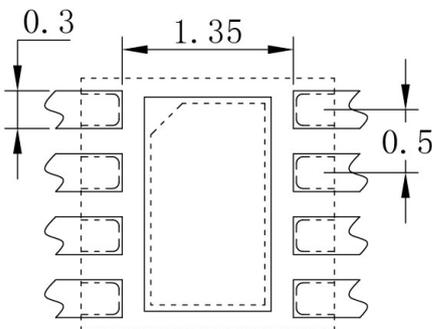

Package Outlines

Note: all dimensions shown in mm

