

Fixed Attenuator

- ◆ DC to 3.5 GHz
- ◆ 6 dB
- ◆ 150 Watt
- ◆ N Type

Features

- High Power
- High attenuation accuracy
- Small VSWR
- Low PIM

Model No. Description

FATXXXXXXXX

XXX- power handling:150W.

X- connector type: SMA, N type or
SMB connector.

XX- attenuation: **dB.

XX- 04 represents type number

AVERAGE POWER: 150W average to 25°C ambient temperature,
derated linearly to 15W @ 125°C.

PEAK POWER: 5KW (5µs pulse width with 1.5% duty cycle)

CONNECTOR TYPE: N, N male to N female bidirectional type

WEIGHT: about 1.2Kg



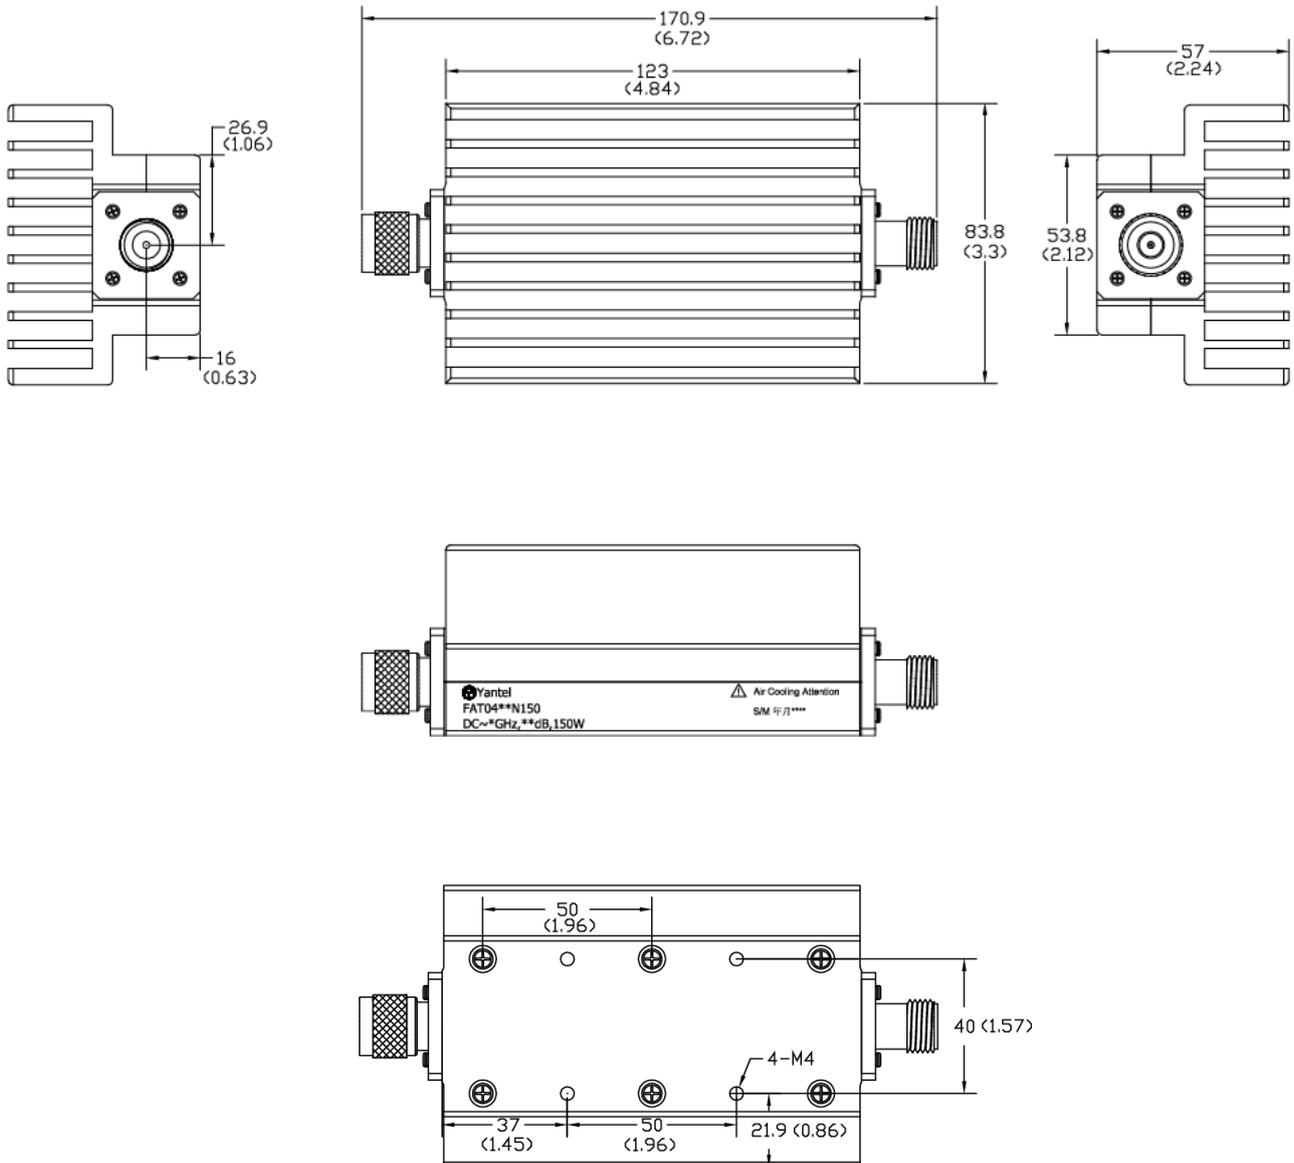
Specifications

Frequency Range	DC to 3.5 GHz
Attenuation	6 dB
Attenuation Accuracy	±0.65 dB over DC - 3 GHz ±0.9 dB over 3 – 3.5 GHz
Nominal Impedance	50 Ohm
Average Power	150 Watt
Operating Temperature	-55 °C to +125°C
Storage Temperature	-55 °C to +125°C

FREQ. RANGE (GHz)	Typical VSWR(:1)	Maximum VSWR(:1)
DC to 1	1.10	
1 to 2	1.20	
2 to 3.5	1.25	
DC to 3.5		1.30

Material & Plating

Parts	Material	Plating(Micro-inch)
Body & Nut	Aluminum	Black Anodize
Contact (female & male)	QSn6.5-0.1	Gold 30
Insulator	Teflon	

Package Outlines

Notes:

1. all dimensions shown in mm & inch
2. Dimensions Tolerance $\pm 2\%$
3. Dimensions and specifications refer to connector type N unless otherwise specified.
4. Custom designs available for other special attenuation value & accuracy