


## Description

The products are widely used in China and global 4G/5G base station, 5G network coverage, BeiDou navigation antenna, vehicle-mounted high-precision navigation (unmanned) antenna and other applications. The products have miniaturization, low-loss, wide-bandwidth, high power density, high reliability, high cost-effective and other competitive advantages.

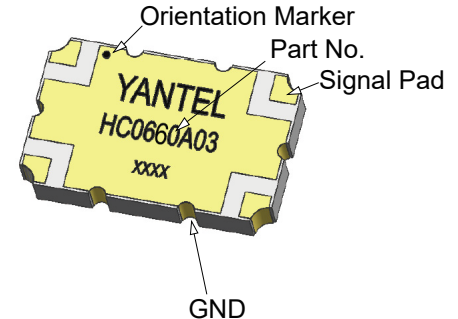

## Features:

- 470 –610 MHz
- CMMB
- High Power
- Very Low Loss
- Tight Amplitude Balance
- High Isolation
- Low VSWR
- Good Repeatability
- CTE compatible with FR4, G-10, RF-35, RO4350B and polyimide
- Immersion gold, prevent surface oxidation & scratch
- RoHS Compliant
- Tape & Reel Package available


## Electrical Specifications

| Frequency            | Isolation            | Insertion Loss         | VSWR           | Amplitude Balance |
|----------------------|----------------------|------------------------|----------------|-------------------|
| <i>MHz</i>           | <i>dB Min</i>        | <i>dB Max</i>          | <i>Max : 1</i> | <i>dB Max</i>     |
| 470- 610             | 20                   | 0.20                   | 1.20           | ± 0.35            |
| <b>Phase Balance</b> | <b>Power</b>         | <b>Operating Temp.</b> |                |                   |
| <i>Degrees</i>       | <i>Avg. CW Watts</i> | <i>°C</i>              |                |                   |
| 90 ± 3.0             | 200                  | -55 to +95             |                |                   |

## Notes:


1. All the above data are based on specified demo board.
2. Insertion loss: Thru board loss has been removed.

## Mechanical Outline

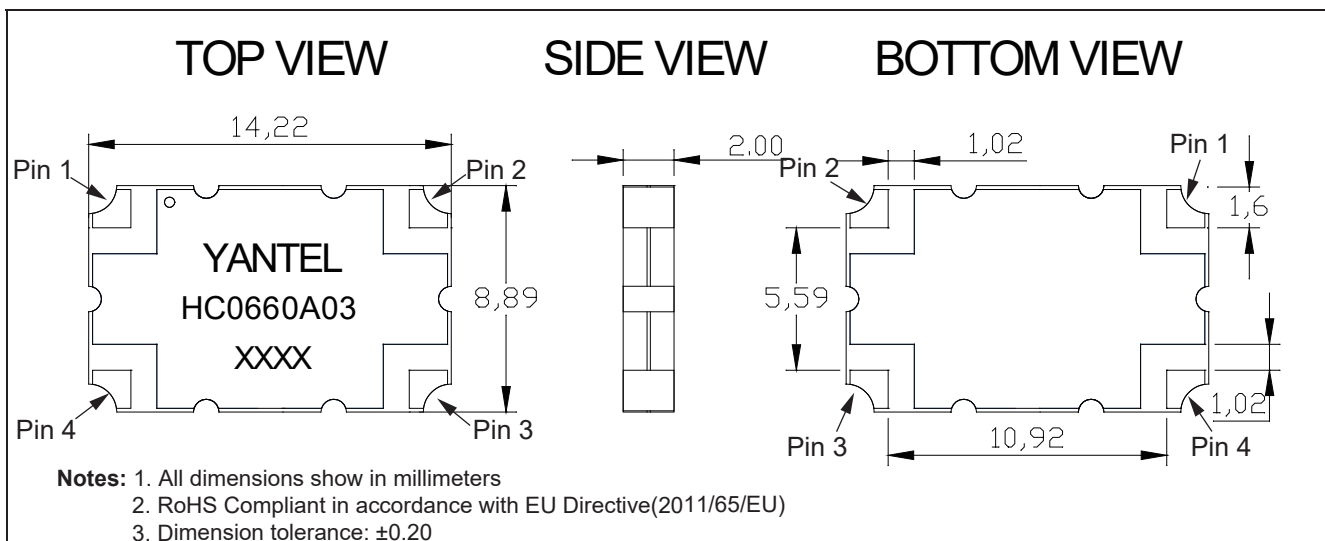

## Hybrid Coupler Pin Configuration

The HC0660A03 has an orientation marker to denote Pin 1. Once port one has been identified the other ports are known automatically. Please see the chart below for clarification:

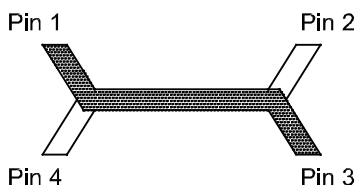


| Configuration    | Pin 1                     | Pin 2                     | Pin 3                     | Pin 4                     |
|------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| <b>Splitter</b>  | Input                     | Isolated                  | -3dB $\angle \theta - 90$ | -3dB $\angle \theta$      |
| <b>Splitter</b>  | Isolated                  | Input                     | -3dB $\angle \theta$      | -3dB $\angle \theta - 90$ |
| <b>Splitter</b>  | -3dB $\angle \theta - 90$ | -3dB $\angle \theta$      | Input                     | Isolated                  |
| <b>Splitter</b>  | -3dB $\angle \theta$      | -3dB $\angle \theta - 90$ | Isolated                  | Input                     |
| <b>*Combiner</b> | A $\angle \theta - 90$    | A $\angle \theta$         | Isolated                  | Output                    |
| <b>*Combiner</b> | A $\angle \theta$         | A $\angle \theta - 90$    | Output                    | Isolated                  |
| <b>*Combiner</b> | Isolated                  | Output                    | A $\angle \theta - 90$    | A $\angle \theta$         |
| <b>*Combiner</b> | Output                    | Isolated                  | A $\angle \theta$         | A $\angle \theta - 90$    |

\*Note: "A" is the amplitude of the applied signals. When two quadrature signals with equal amplitudes are applied to the coupler as described in the table, they will combine at the output port. If the amplitudes are not equal, some of the applied energy will be directed to the isolated port.


## Typical Performance Data (@25°C)

| Frequency (MHz) | Coupling (dB) | Transmission (dB) | Insertion Loss (dB) | Isolation (dB) | Amplitude Balance (dB) | Phase (degree) | Return Loss(dB) |        |        |        |
|-----------------|---------------|-------------------|---------------------|----------------|------------------------|----------------|-----------------|--------|--------|--------|
|                 |               |                   |                     |                |                        |                | S11             | S22    | S33    | S44    |
| 470             | -3.41         | -2.89             | -0.13               | -22.87         | -0.26                  | -88.48         | -24.98          | -24.37 | -23.93 | -24.80 |
| 477             | -3.37         | -2.93             | -0.13               | -22.87         | -0.23                  | -88.48         | -24.99          | -24.26 | -23.84 | -24.72 |
| 484             | -3.33         | -2.96             | -0.13               | -22.86         | -0.19                  | -88.48         | -24.92          | -24.17 | -23.80 | -24.64 |
| 491             | -3.30         | -2.99             | -0.13               | -22.85         | -0.15                  | -88.47         | -24.86          | -24.08 | -23.76 | -24.55 |
| 498             | -3.27         | -3.02             | -0.13               | -22.91         | -0.12                  | -88.49         | -24.84          | -24.01 | -23.68 | -24.44 |
| 505             | -3.23         | -3.05             | -0.13               | -22.97         | -0.09                  | -88.50         | -24.83          | -23.94 | -23.60 | -24.32 |
| 512             | -3.20         | -3.08             | -0.13               | -22.97         | -0.06                  | -88.50         | -24.79          | -23.87 | -23.51 | -24.14 |
| 519             | -3.18         | -3.12             | -0.14               | -22.96         | -0.03                  | -88.49         | -24.75          | -23.79 | -23.41 | -23.95 |
| 526             | -3.15         | -3.15             | -0.14               | -22.96         | 0.00                   | -88.49         | -24.74          | -23.65 | -23.36 | -23.84 |
| 533             | -3.13         | -3.17             | -0.14               | -22.96         | 0.02                   | -88.50         | -24.74          | -23.50 | -23.32 | -23.76 |
| 540             | -3.10         | -3.20             | -0.14               | -22.93         | 0.05                   | -88.52         | -24.72          | -23.41 | -23.26 | -23.63 |
| 547             | -3.08         | -3.22             | -0.14               | -22.89         | 0.07                   | -88.53         | -24.70          | -23.34 | -23.19 | -23.49 |
| 554             | -3.07         | -3.24             | -0.14               | -22.85         | 0.09                   | -88.53         | -24.67          | -23.26 | -23.11 | -23.37 |
| 561             | -3.05         | -3.26             | -0.14               | -22.80         | 0.11                   | -88.53         | -24.66          | -23.17 | -23.01 | -23.28 |
| 568             | -3.03         | -3.29             | -0.15               | -22.76         | 0.13                   | -88.53         | -24.64          | -23.06 | -22.93 | -23.19 |
| 575             | -3.02         | -3.31             | -0.15               | -22.73         | 0.14                   | -88.53         | -24.63          | -22.93 | -22.86 | -23.10 |
| 582             | -3.00         | -3.33             | -0.15               | -22.68         | 0.16                   | -88.56         | -24.57          | -22.78 | -22.75 | -23.01 |
| 589             | -2.99         | -3.34             | -0.15               | -22.60         | 0.17                   | -88.62         | -24.47          | -22.62 | -22.59 | -22.94 |
| 596             | -2.98         | -3.36             | -0.15               | -22.54         | 0.19                   | -88.65         | -24.38          | -22.48 | -22.44 | -22.84 |
| 603             | -2.96         | -3.37             | -0.15               | -22.51         | 0.20                   | -88.65         | -24.29          | -22.34 | -22.30 | -22.71 |
| 610             | -2.95         | -3.39             | -0.15               | -22.44         | 0.21                   | -88.65         | -24.16          | -22.19 | -22.16 | -22.57 |

**Typical Performance (-55°C, 25°C, 95°C, 125°C: 470-610 MHz)**

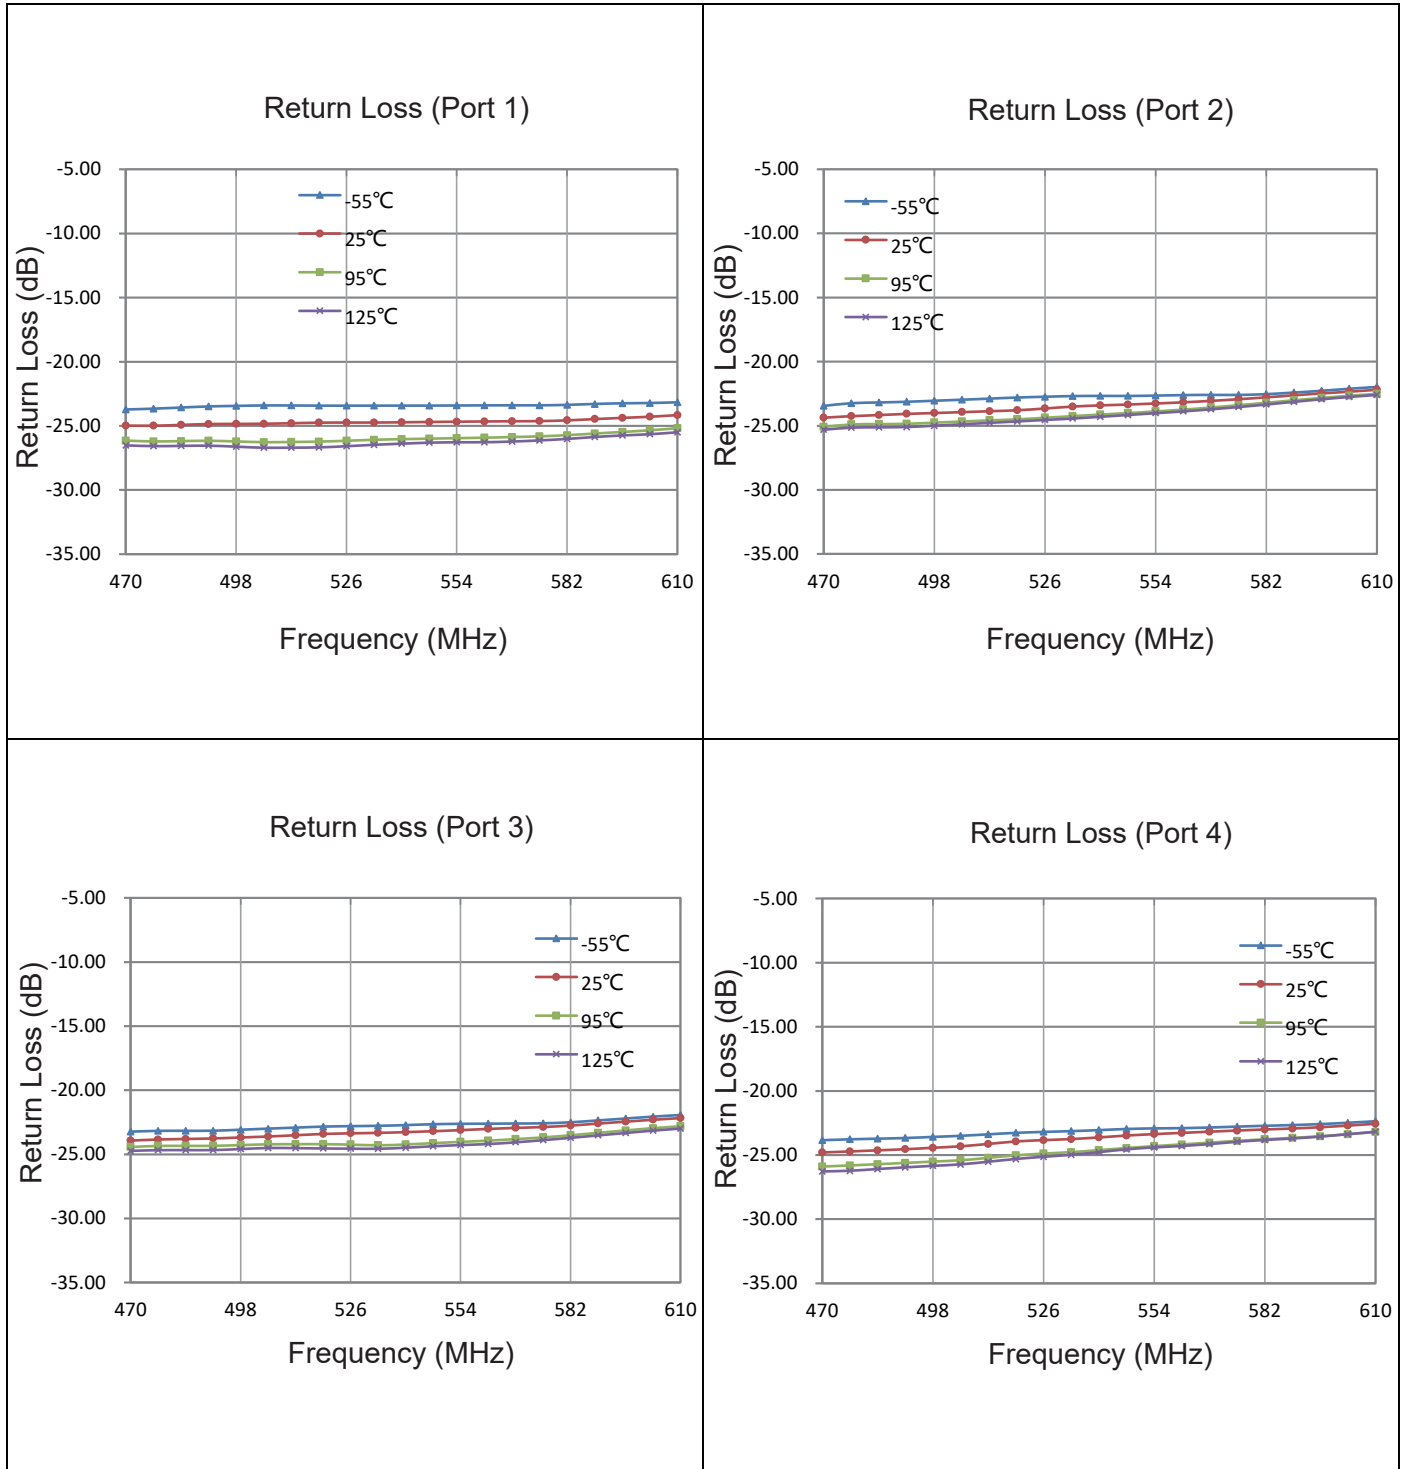

**Typical Performance (-55°C, 25°C, 95°C, 125°C:: 470-610 MHz)**

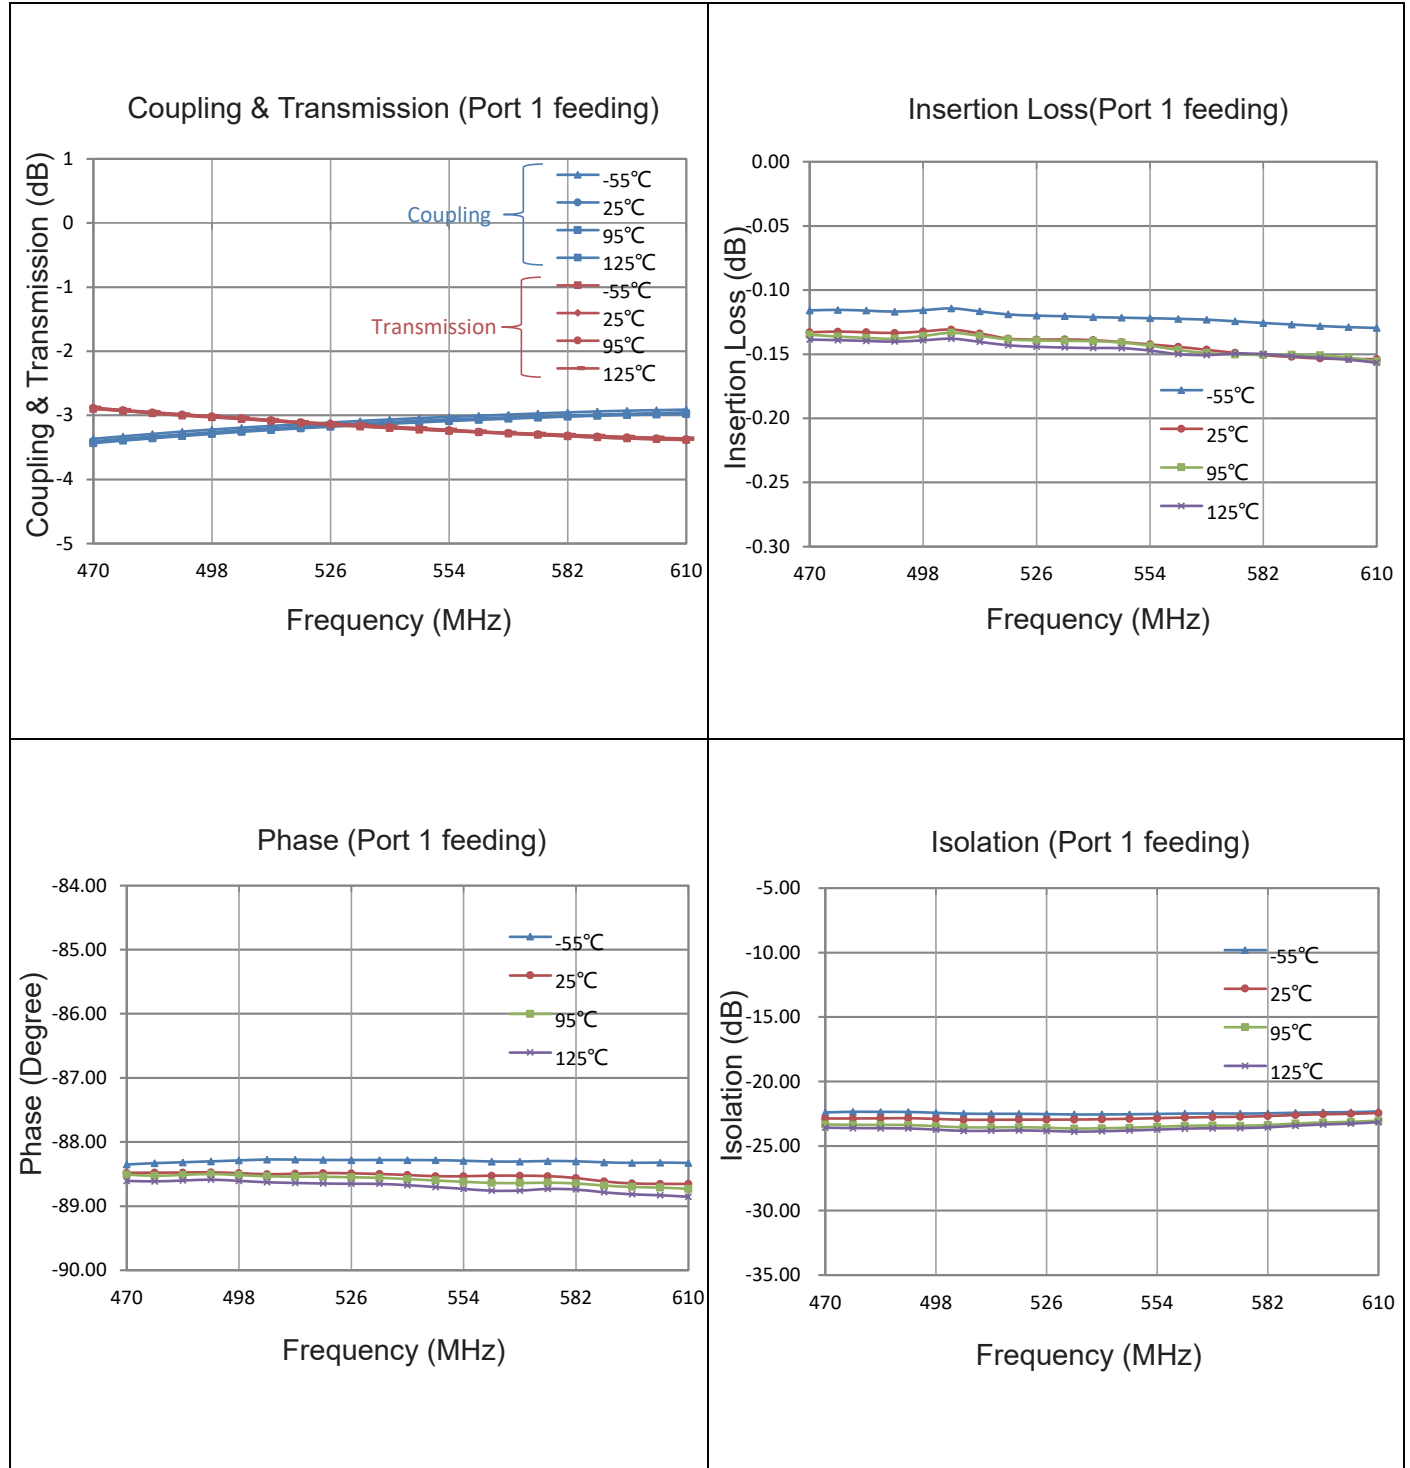

## Definition of Measured Specifications

| Parameter                                    | Definition                                                                                             | Mathematical Representation                                                                                                                                 |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>VSWR</b><br>(Voltage Standing Wave Ratio) | The impedance match of the coupler to a 50Ω system. A VSWR of 1:1 is optimal.                          | $VSWR = \frac{V_{max}}{V_{min}}$<br>Vmax = voltage maxima of a standing wave<br>Vmin = voltage minima of a standing wave                                    |
| <b>Return Loss</b>                           | The impedance match of the coupler to a 50Ω system. Return Loss is an alternate means to express VSWR. | $\text{Return Loss (dB)} = 20 \log \frac{VSWR + 1}{VSWR - 1}$                                                                                               |
| <b>Insertion Loss</b>                        | The input power divided by the sum of the power at the two output ports.                               | $\text{Insertion Loss (dB)} = 10 \log \frac{P_{in}}{P_{cpl} + P_{transmission}}$                                                                            |
| <b>Isolation</b>                             | The input power divided by the power at the isolated port.                                             | $\text{Isolation (dB)} = 10 \log \frac{P_{in}}{P_{iso}}$                                                                                                    |
| <b>Phase Balance</b>                         | The difference in phase angle between the two output ports.                                            | Phase at coupled port – Phase at transmission port                                                                                                          |
| <b>Amplitude Balance</b>                     | The power at each output divided by the average power of the two outputs.                              | $10 \log \left( \frac{P_{cpl}}{P_{cpl} + P_{transmission}} \right) \text{ and } 10 \log \left( \frac{P_{transmission}}{P_{cpl} + P_{transmission}} \right)$ |

## Test Method


1. Calibrating your vector network analyzer.
2. Connect the VNA 4 Port to DUT respectively.
3. Measure the data of coupling through port 1 to port 4(S41).
4. Measure the data of transmission through port 1 to port 3(S31).
5. Measure the data of isolation through port 1 to port 2(S21).
6. Measure the data of phase port 4 & port 3(port 1 feeding).
7. Measure the data of return loss port 1, port 2, port 3 & port 4.
8. According to the above data to calculate insertion loss, amplitude balance & phase.

Note:


1. When calculating insertion loss at room temperature, demo board loss should be removed from both coupling & transmission data.

Please refer to the below table for demo board loss :

| Frequency Range(MHz) | Demo Board Loss (dB) @25°C |
|----------------------|----------------------------|
| 470-860              | 0.07                       |
| 800-1000             | 0.10                       |
| 1200-1700            | 0.15                       |
| 1700-2000            | 0.15                       |
| 2000-2300            | 0.20                       |
| 2300-2700            | 0.25                       |

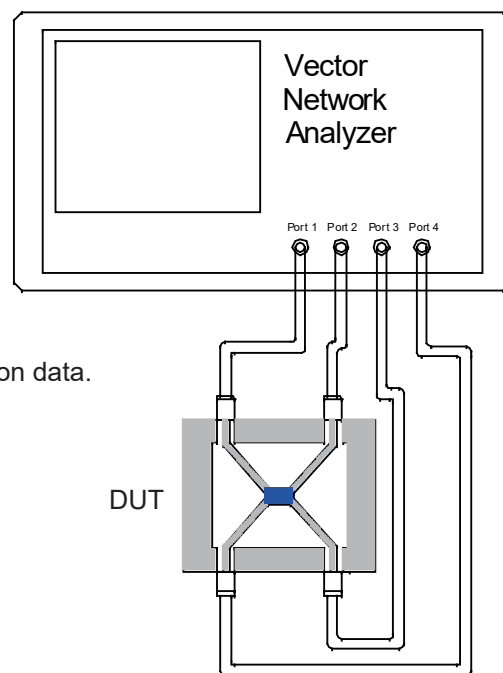


## Recommended PCB Layout

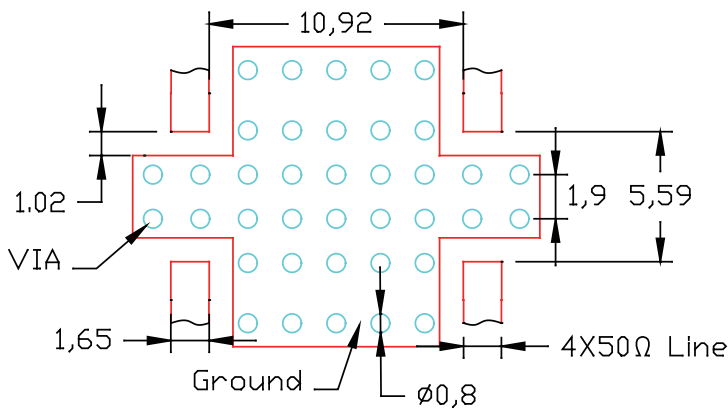


### NOTE:

1. 50Ω line width is shown above designing from RO4350B dielectric thickness 0.762mm; copper 1 OZ
2. Bottom side of the PCB is continuous ground plane.
3. All dimensions shown in mm.


## Reflow Profile

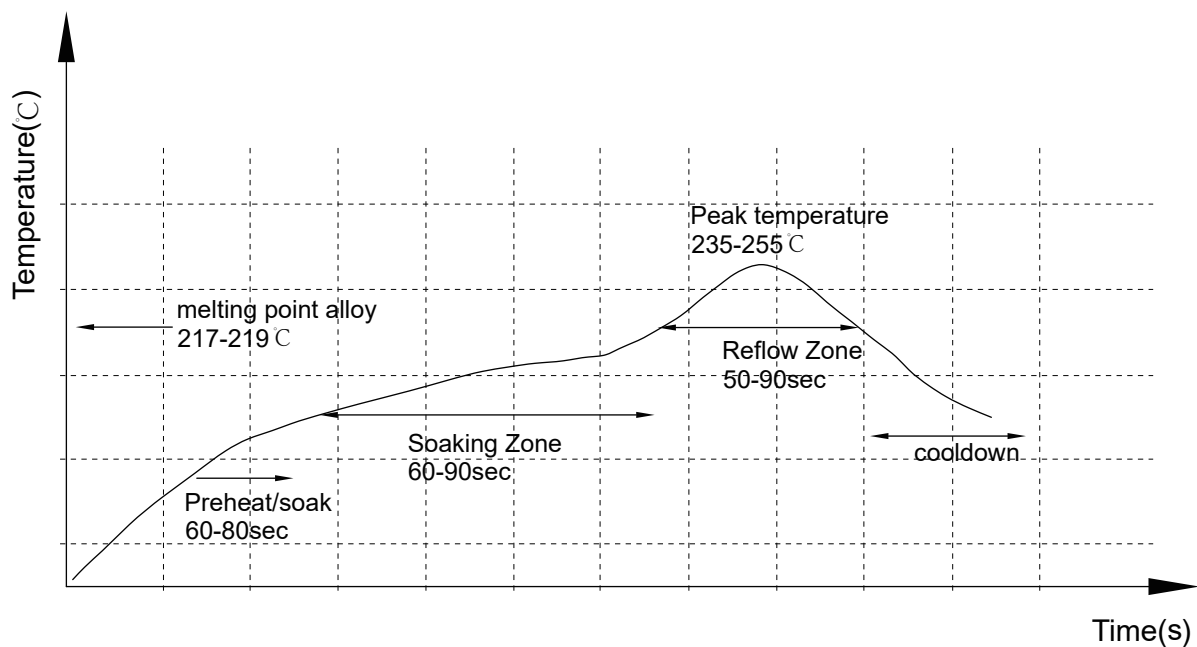

## Reliability Test Flow

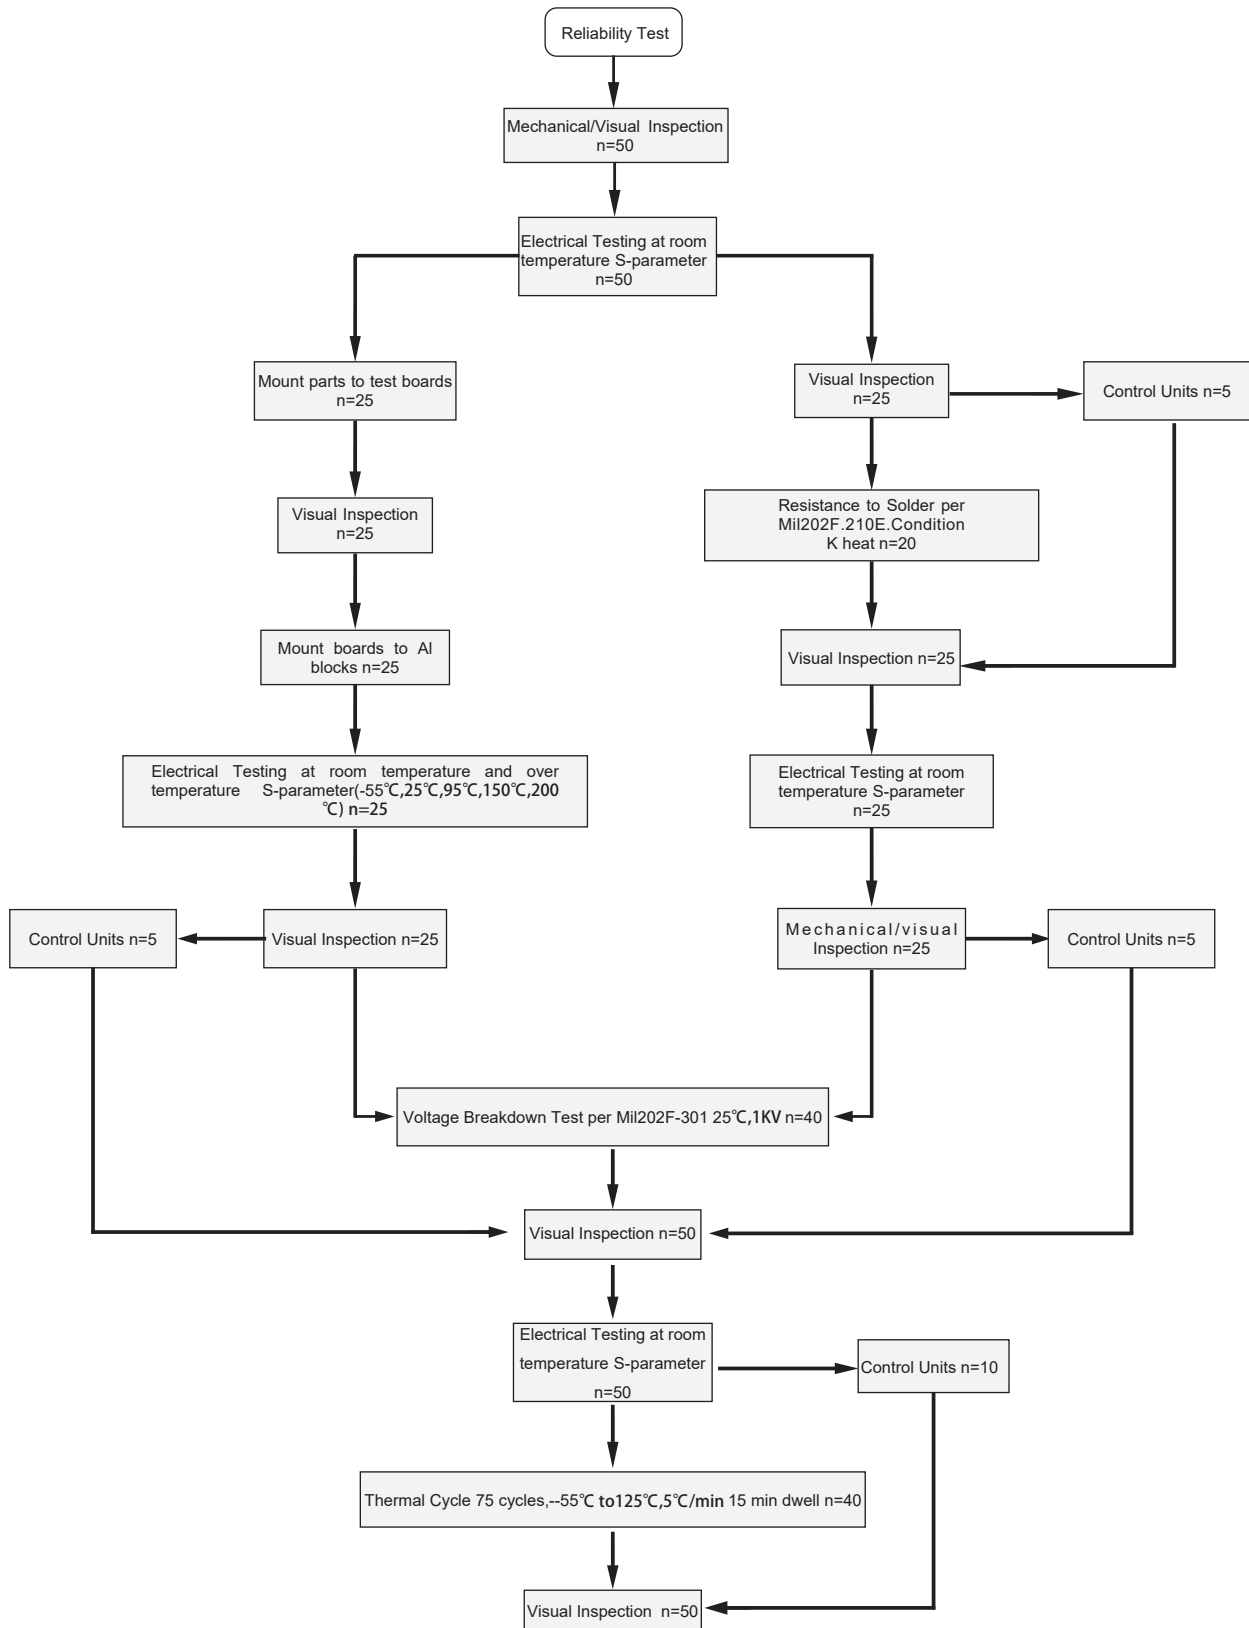


## Reliability Test Flow

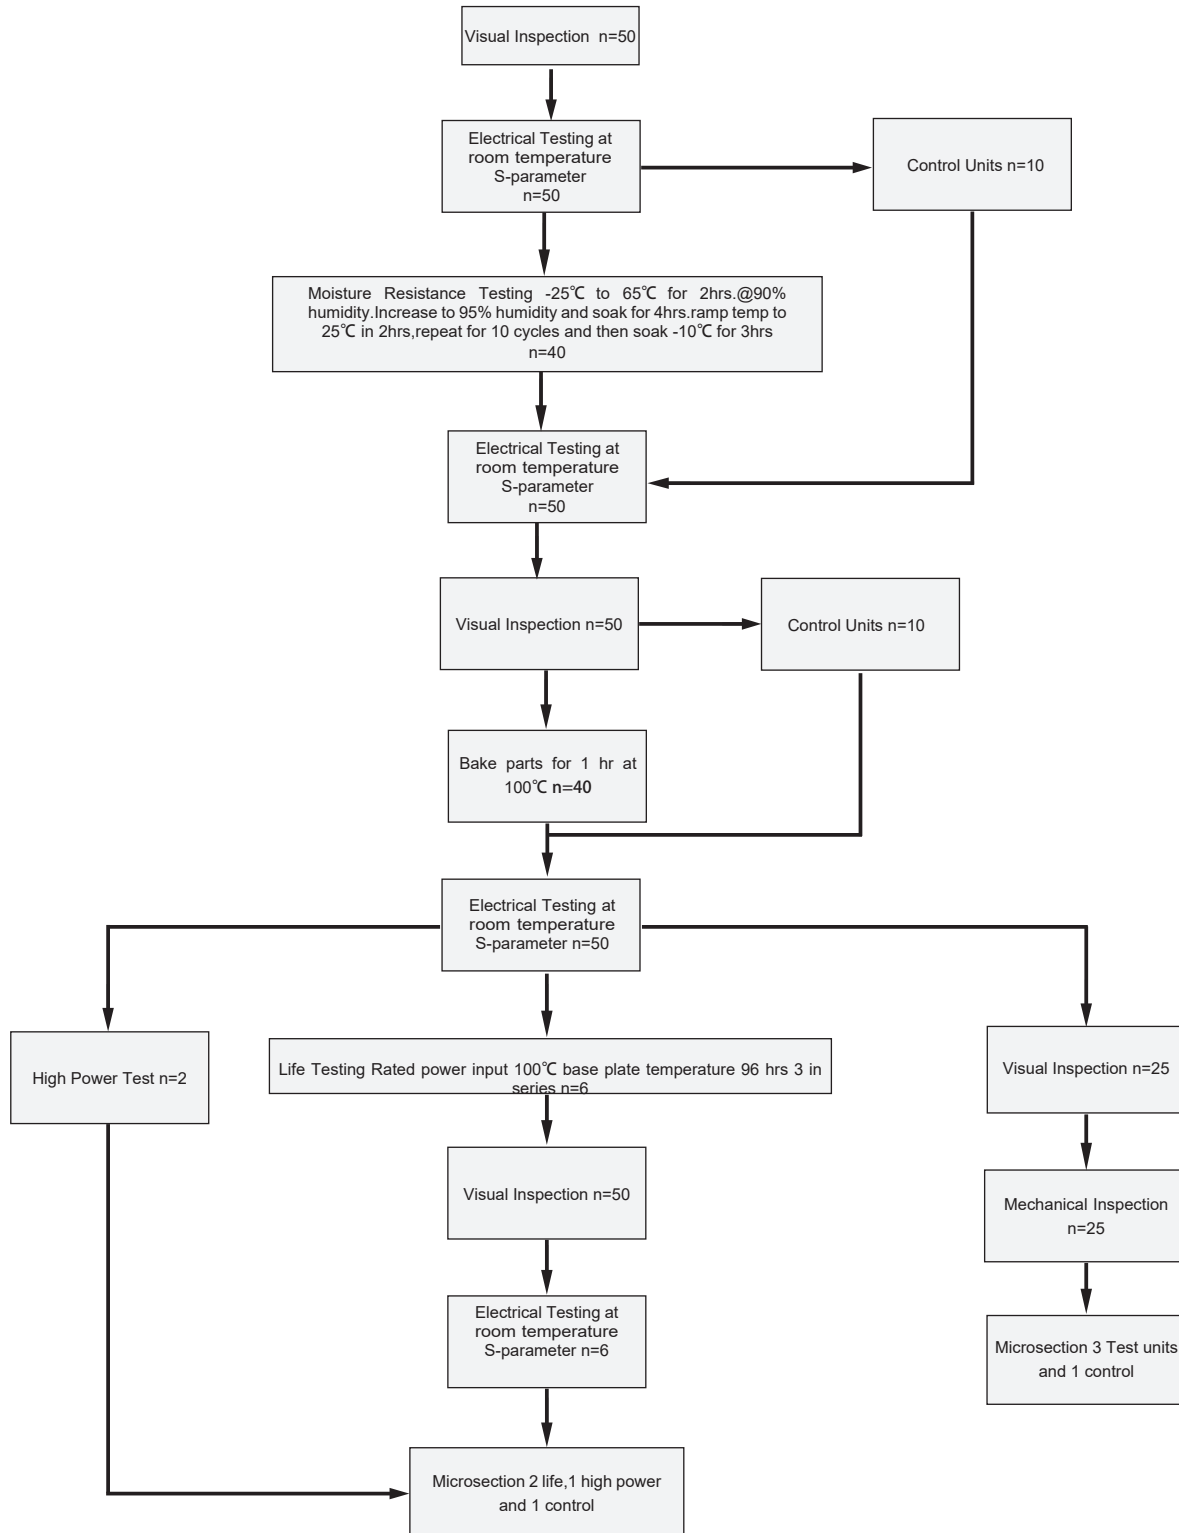


## Tape and Reel Drawing

Feeding Direction

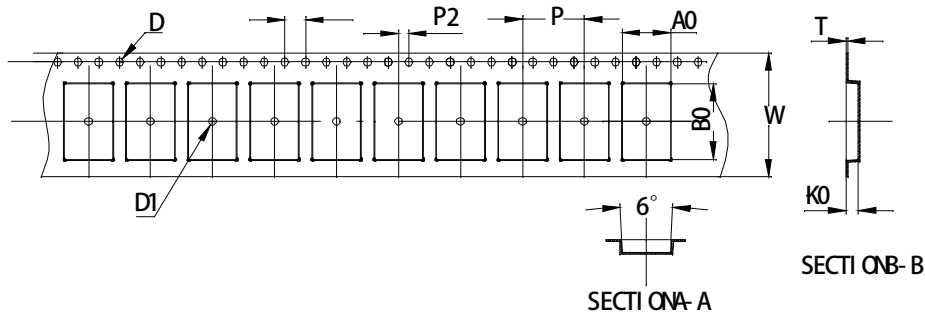

| ITEM | W      | A0    | B0    | K0    | P     | F     | E     | D     | D1    | P0    | P2    | T     | 7"     |
|------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| DIM  | (mm)   | 24.00 | 9.30  | 14.70 | 2.40  | 12.00 | 11.50 | 1.75  | 1.50  | 1.50  | 4.00  | 2.00  | 0.30   |
|      | (inch) | 0.945 | 0.366 | 0.579 | 0.094 | 0.472 | 0.452 | 0.069 | 0.059 | 0.059 | 0.157 | 0.079 | 0.012  |
| TOLE | (mm)   | +0.30 | +0.10 | +0.10 | +0.10 | +0.10 | +0.10 | +0.10 | +0.10 | +0.10 | +0.10 | +0.05 | 500pcs |
|      |        | -0.30 | -0.10 | -0.10 | -0.10 | -0.10 | -0.10 | -0.00 | -0.00 | -0.10 | -0.10 | -0.05 |        |

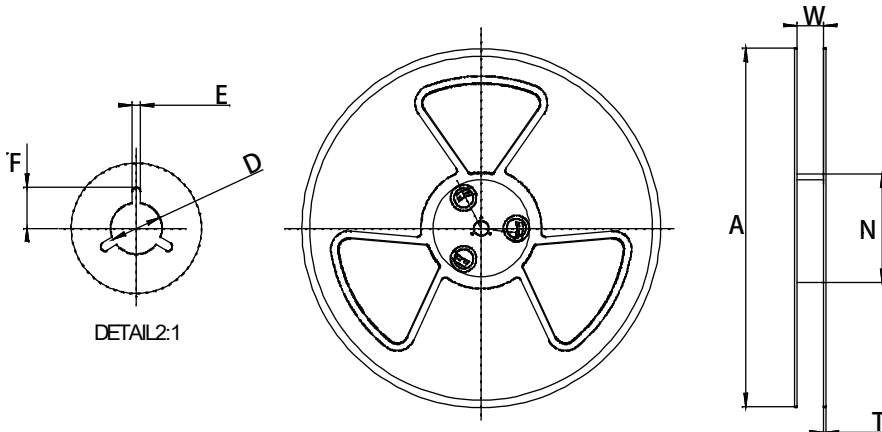

| Symbol | Dimensions    |        |
|--------|---------------|--------|
|        | (mm)          | (inch) |
| W      | 24.5±0.4      | 0.965  |
| A      | 177±0.5       | 7.0    |
| N      | 63±0.3        | 2.48   |
| T      | 1.8±0.2       | 0.071  |
| E      | 2.1±0.3       | 0.083  |
| F      | 10.75±0.3     | 0.423  |
| D      | 13.5+0.5/-0.2 | 0.531  |

