

# Data Sheet

## DC0900U05



### Directional Coupler

### 830 MHz-930 MHz



### Features

- Small Size (2x2mm)
- Very Low Loss
- Excellent directivity
- Broad frequency coverage
- High Isolation
- Low VSWR
- Good Repeatability
- Tape & Reel
- Power handling:5 watts

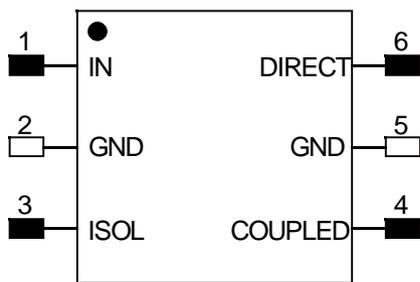


TOP VIEW

### Applications

- Phase shifter / Attenuator
- Balanced amplifier / LNA configurations
- Modulators
- Mixers
- Power combining /dividing

#### Notes:

- 1.This part has passed through 100% RF test.
2. Suggest to add Capacitors of DC Blocker between Pins(with black color) and external circuit to prevent DC signal entry to guarantee parts normal work.
3. Suggest to add a TVS Diode in parallel between Eletrode (with black color) and Capacitor of DC Blocker to provide ESD protection for the product. TVS Diode use ON Semiconductor's ESD9101 is recommended.

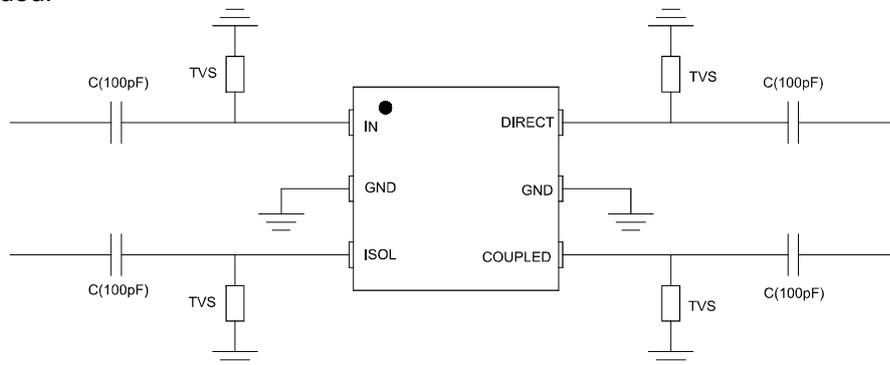

#### ESD Rating

Human Body Model (HBM):  $\leq 650V$  in accordance with ANSI/ESD STM 5.1 - 2001  
 Machine Model (MM):  $\leq 50V$  in accordance with ANSI/ESD STM 5.2 - 1999

Yantel Corporation

# Data Sheet

## DC0900U05

### Directional Coupler


### 830 MHz-930 MHz



#### Electrical Specifications at 25° C

Part No.	Freq. Range (MHz) FL~FU	Power (W)	Size LxW (mm)	Coupling (dB)	Insertion loss (dB)	VSWR(:1)	Directivity (dB)
DC0900U05	830~880	5	2X2	4.7~5.0	0.25	1.03	24.9
	880~930			4.3~4.7			25.3

#### Typical Performance (-40°C, 25°C, 85°C: 800-1000 MHz)

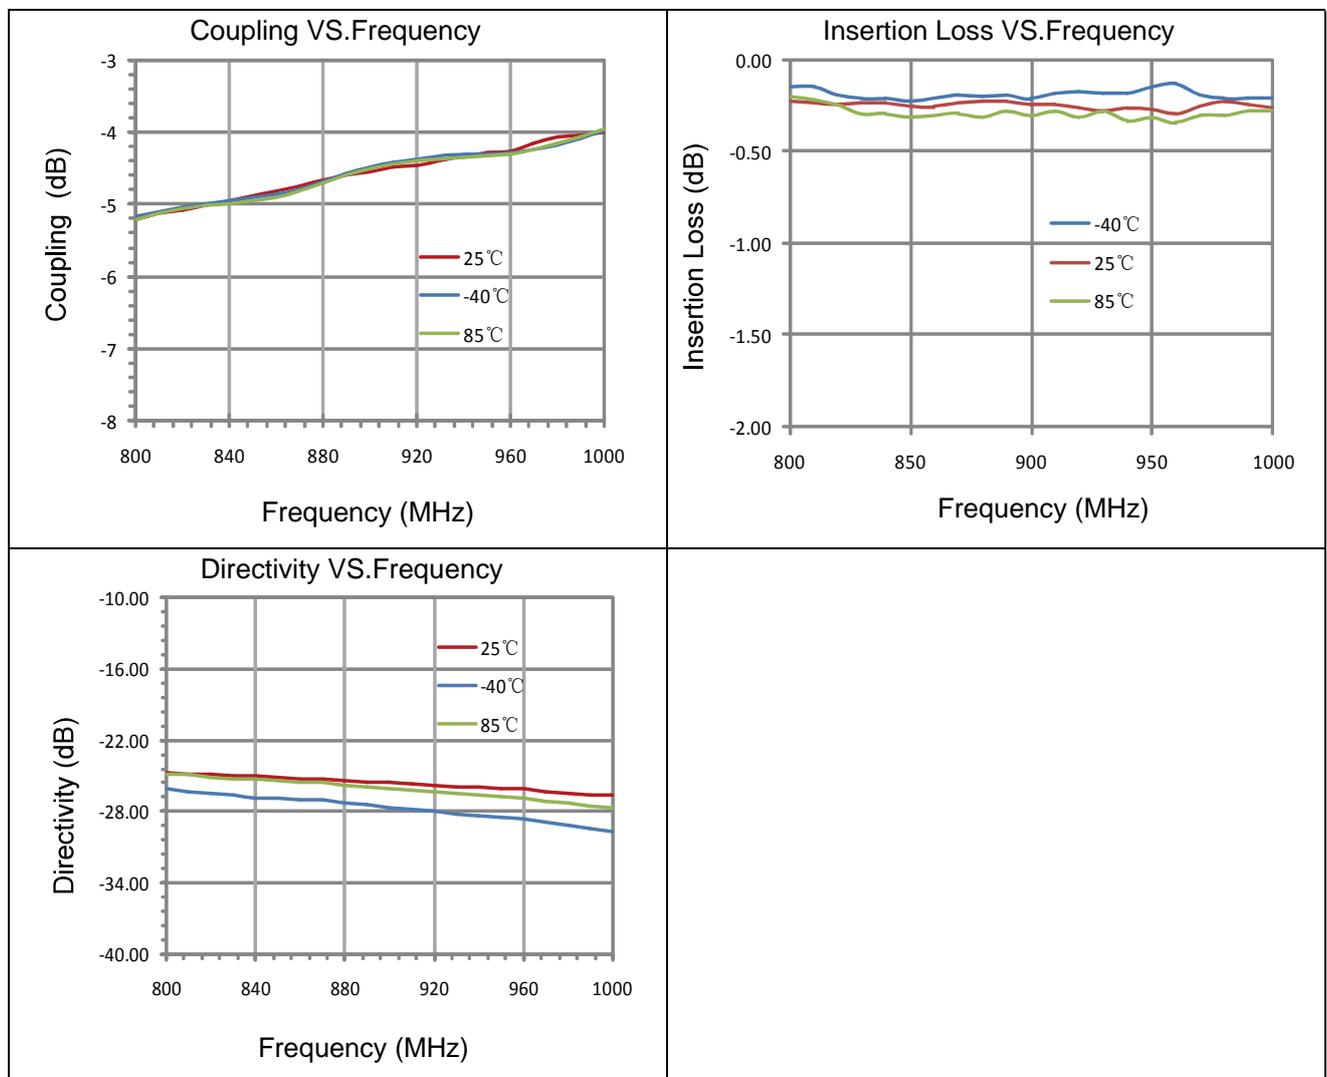

Yantel Corporation

# Data Sheet


## DC0900U05

### Directional Coupler

### 830 MHz-930 MHz



**Typical Performance (-40°C, 25°C, 85°C: 800-1000 MHz)**

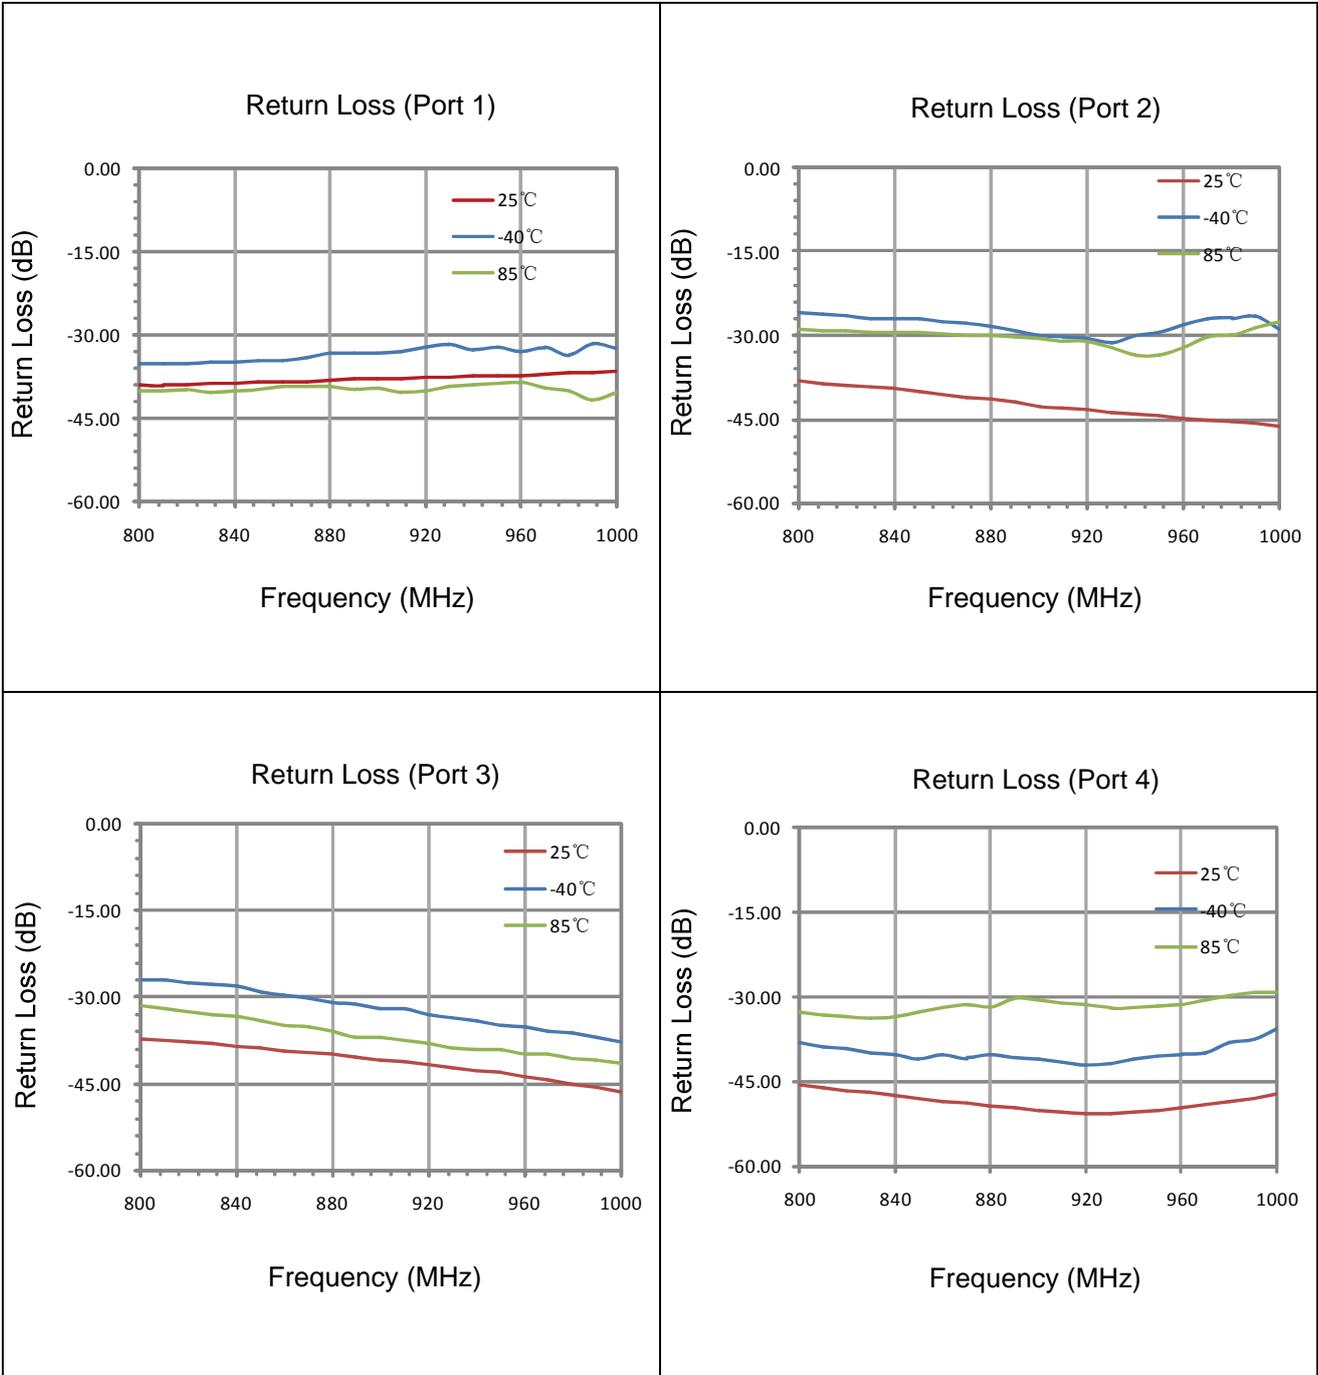

Yantel Corporation


# Data Sheet

## DC0900U05


Directional Coupler  
830 MHz-930 MHz



### Outline Drawing

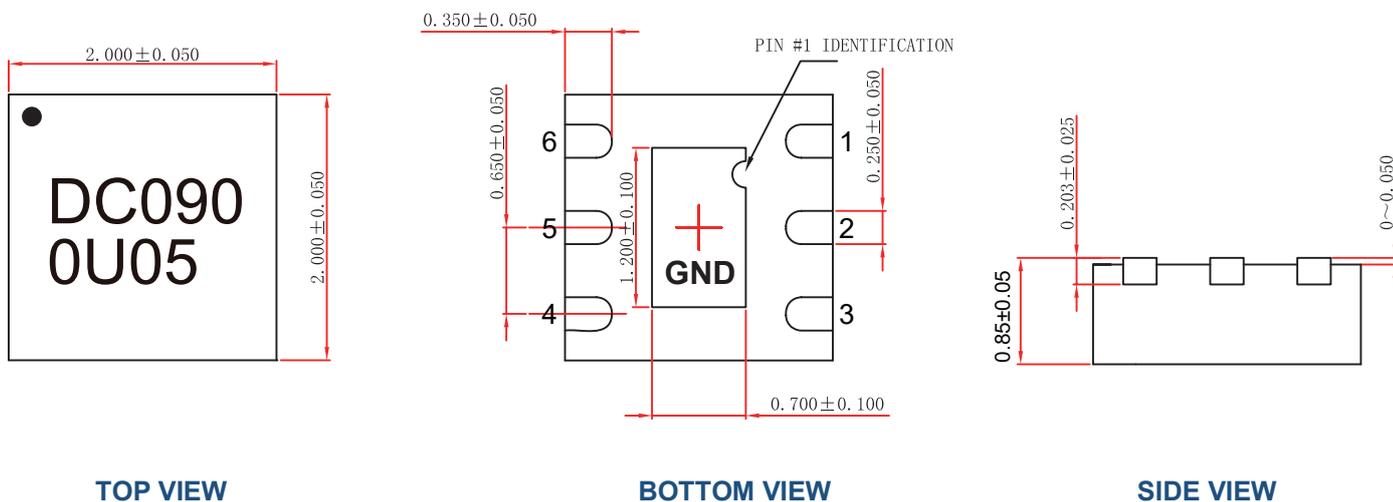


### Land Pattern

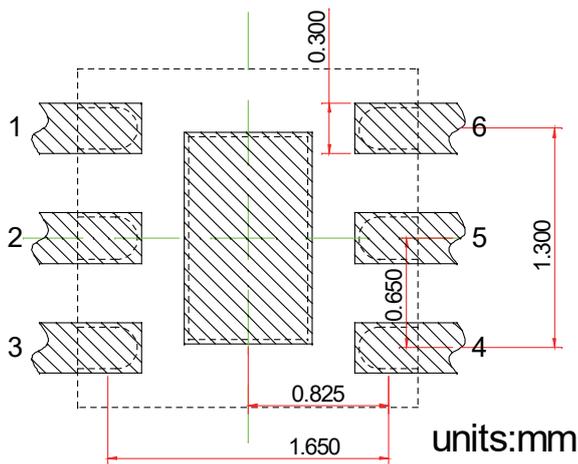

### Recommended Land Pattern Top View

Notes: All dimensions show in millimeters

### Pin Out

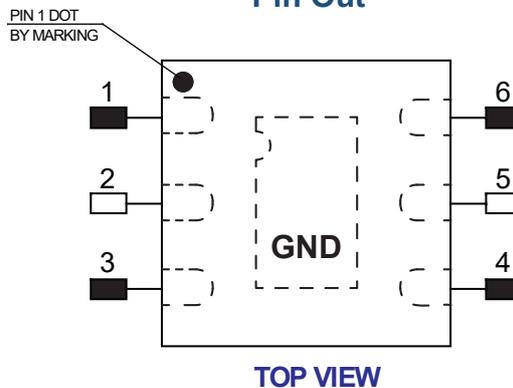

Notes:

1. Require to add Capacitors of DC Blocker between Pins (with black color) and external circuit to prevent DC signal entry to guarantee parts normal work.
2. This part has passed through 100% RF test.

Pin #	Connection
1	IN
2	GND
3	ISOL
4	COUPLED
5	GND
6	DIRECT