

Data Sheet




HC1300U03

3dB 90° Coupler IC
10.7 GHz-14.5 GHz



Features

- Small Size (2×2mm)
- Very Low Loss
- Tight Amplitude Balance
- High Isolation
- Low VSWR
- Good Repeatability
- Tape & Reel
- Power handling
 - 4 Watts as a divider
 - 2 Watts as a combiner

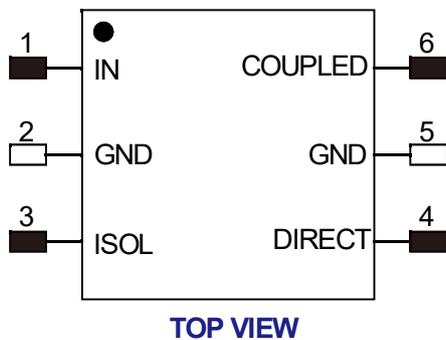

Applications

- Phase shifter / Attenuator
- Balanced amplifier / LNA configurations
- Modulators
- Mixers
- Power combining /dividing

Notes:

- 1.Require to add Capacitors of DC Blocker between Pins(with black color) and external circuit to prevent DC signal entry to guranteeparts normal work.
- 2.This part has passed through 100% RF test.



Electrical Specifications at 25°C

Parameter	Symbol	Min	Typ	Max	Unit
Frequency Range	F	10.7		14.5	GHz
Insertion Loss (Above 3dB)	I _L		0.7	1.3	dB
Isolation	Isol	13	16		dB
Phase Unbalance (Deviation from 90°)	∅ _{bal}		3.0	5.0	deg
Amplitude Unbalance	A _{bal}		0.6	1.0	dB
Input VSWR			1.4	1.6	
Output VSWR			1.3	1.5	

Data Sheet

HC1300U03



3dB 90° Coupler IC
10.7 GHz-14.5 GHz

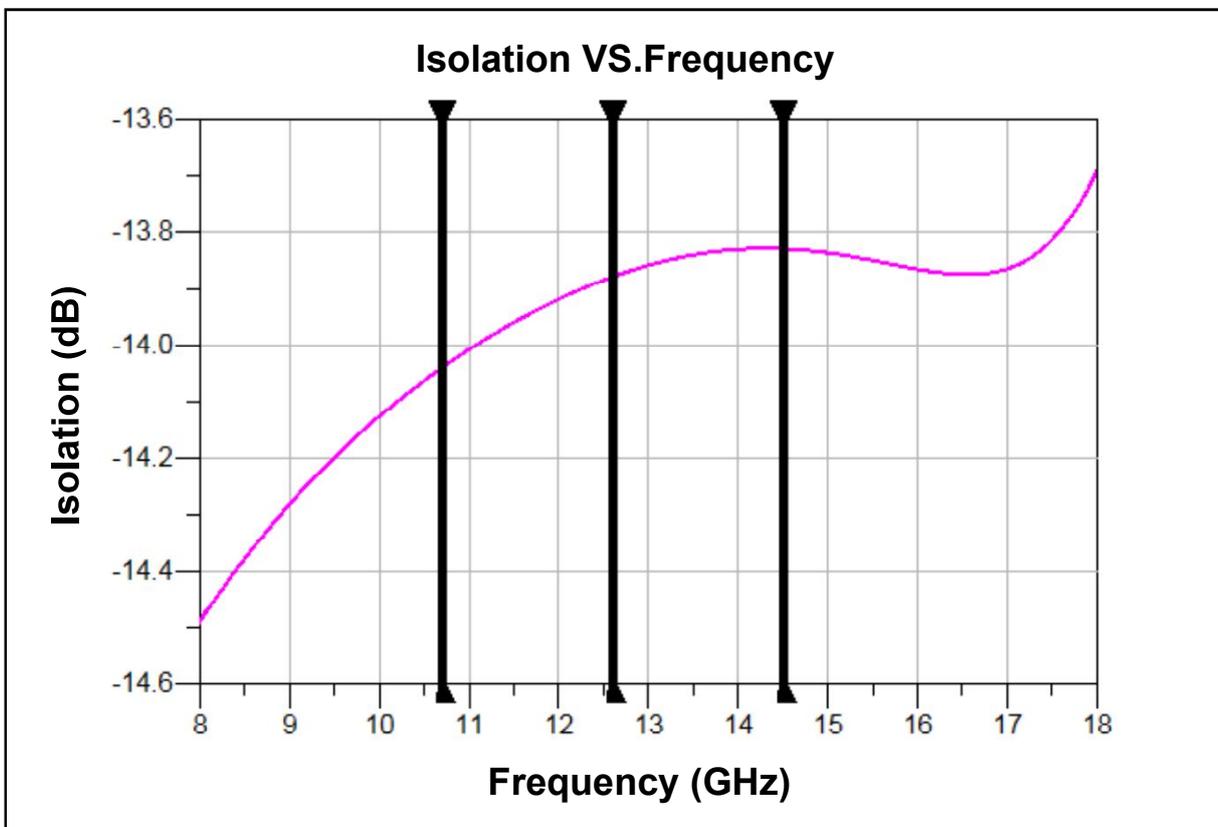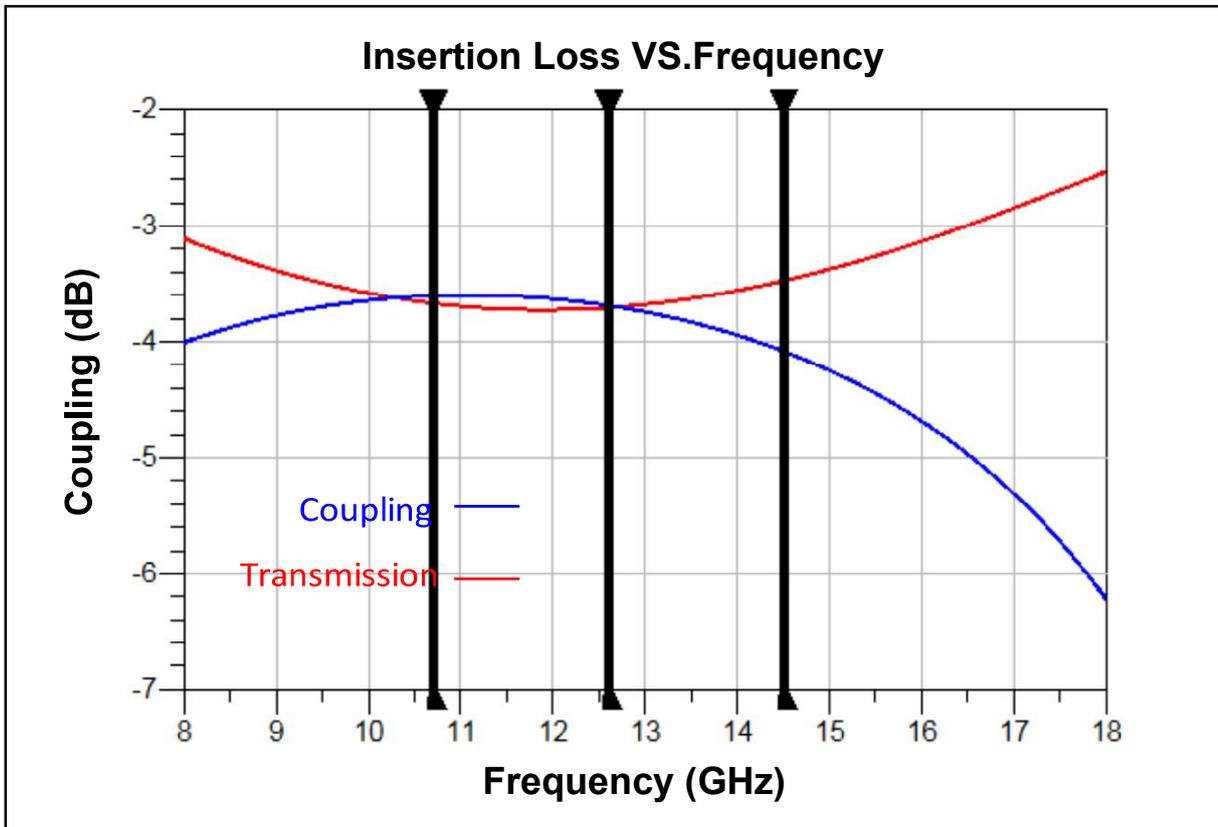

Data Sheet

HC1300U03

3dB 90° Coupler IC
10.7 GHz-14.5 GHz

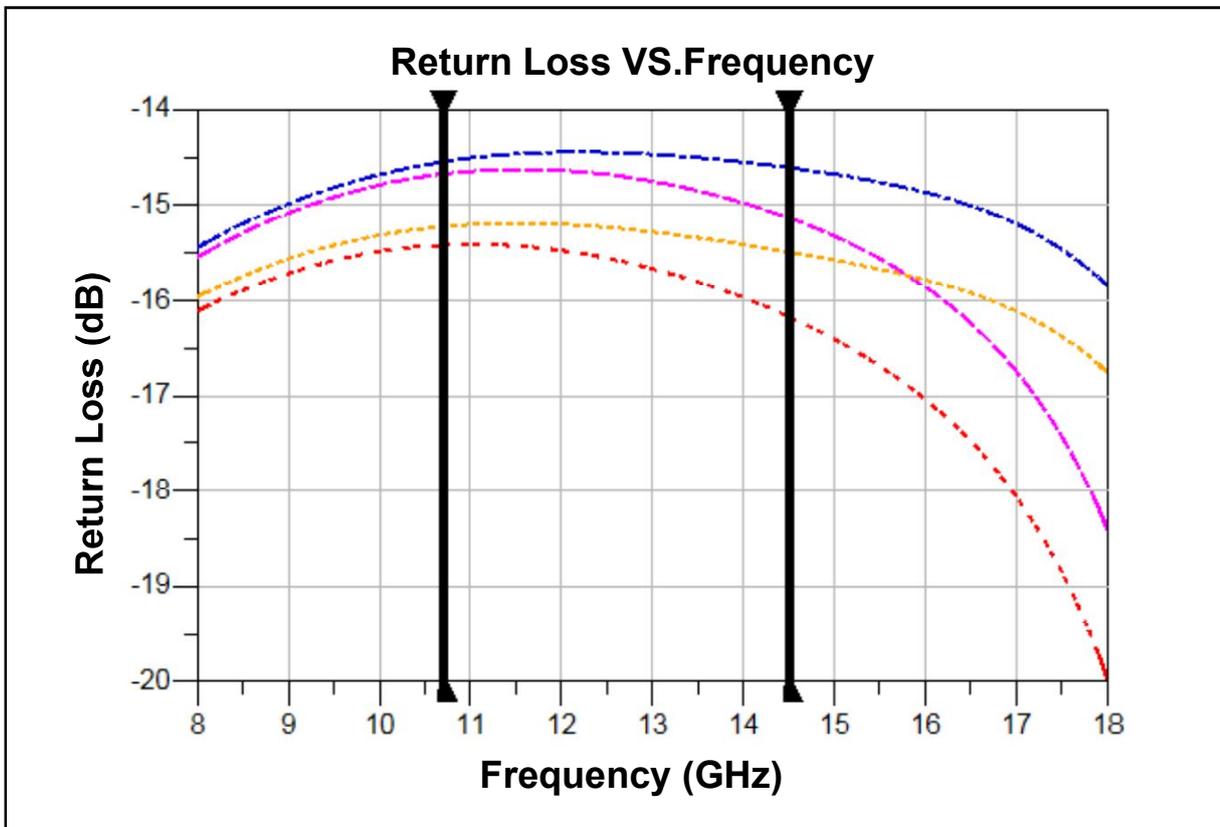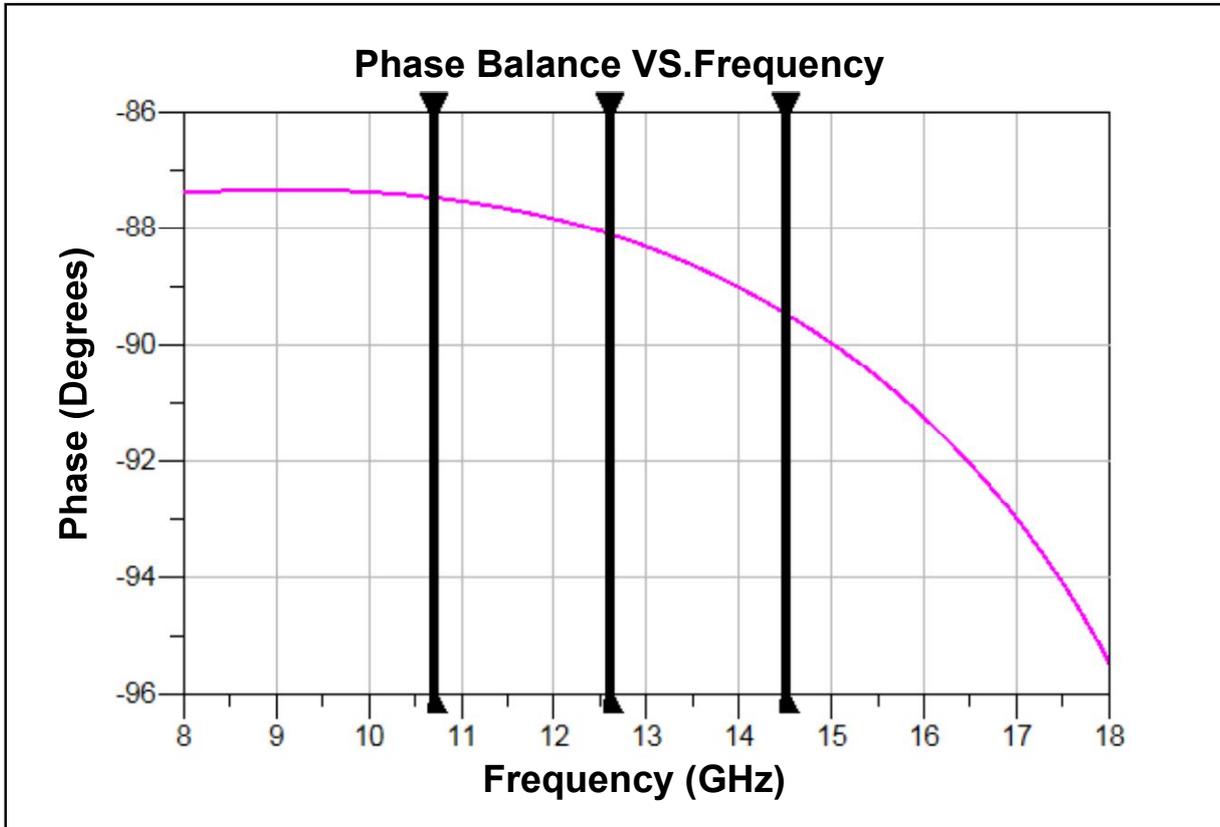


Data Sheet

HC1300U03


3dB 90° Coupler IC
10.7 GHz-14.5 GHz



Outline Drawing

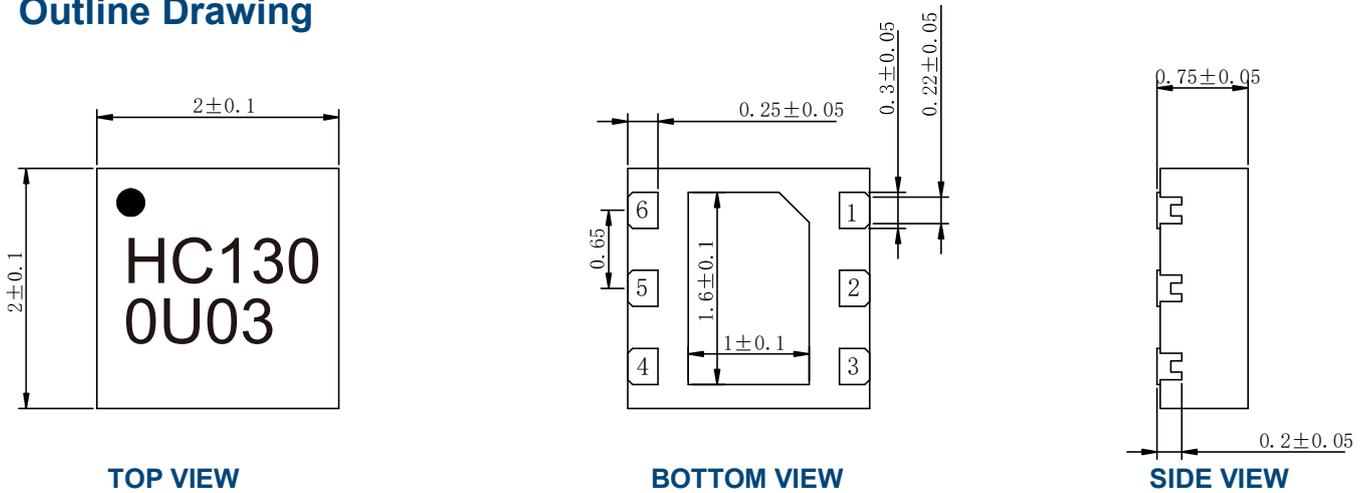


Land Pattern

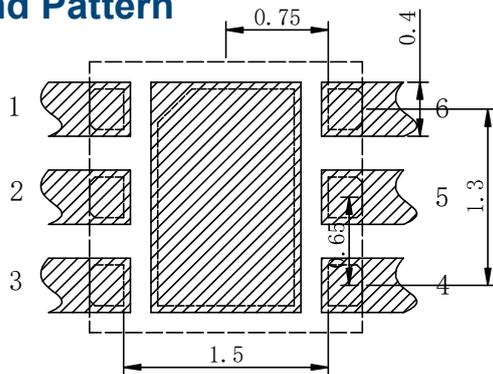

units:mm

Recommended Land Pattern Top View **Notes:** All dimensions show in millimeters

Hybrid Coupler Pin Configuration

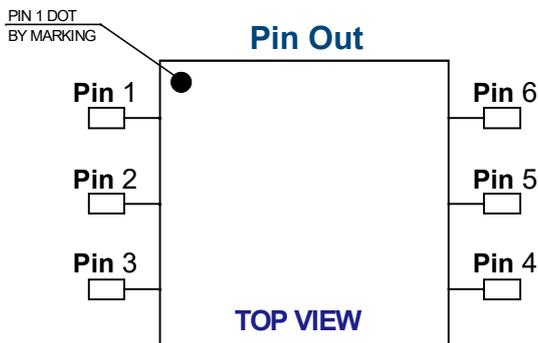

Pin #	Connection	Connection	Connection	Connection
1	IN	ISOL	DIRECT	COUPLED
2	GND	GND	GND	GND
3	ISOL	IN	COUPLED	DIRECT
4	DIRECT	COUPLED	IN	ISOL
5	GND	GND	GND	GND