

Data Sheet



HC2150U03-040

3dB 90° Coupler IC
2.05 GHz-2.25 GHz



Features

- Small Size (2×2mm)
- Very Low Loss
- Tight Amplitude Balance
- High Isolation
- Low VSWR
- Good Repeatability
- Tape & Reel
- Power handling
 - 4 Watts as a divider
 - 2 Watts as a combiner

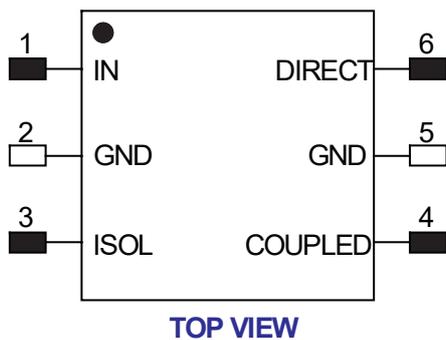

Applications

- Phase shifter / Attenuator
- Balanced amplifier / LNA configurations
- Modulators
- Mixers
- Power combining /dividing

Notes:

- 1.Require to add Capacitors of DC Blocker between Pins(with black color) and external circuit to prevent DC signal entry to guranteeparts normal work.
- 2.This part has passed through 100% RF test.

Electrical Specifications at 25° C

Parameter	Symbol	Min	Typ	Max	Unit
Frequency Range	F	2050		2250	MHz
Insertion Loss (Above 3dB)	I_L		0.25	0.35	dB
Isolation	Isol	27	30		dB
Phase balance	\varnothing_{bal}		1.0	1.5	deg
Amplitude balance	A_{bal}		0.5	0.85	dB
Return Loss	R_L	24	28		dB

Data Sheet


HC2150U03-040

3dB 90° Coupler IC

2.05 GHz-2.25 GHz



Typical Performance (-40°C, 25°C, 85°C: 2.05-2.25 GHz)

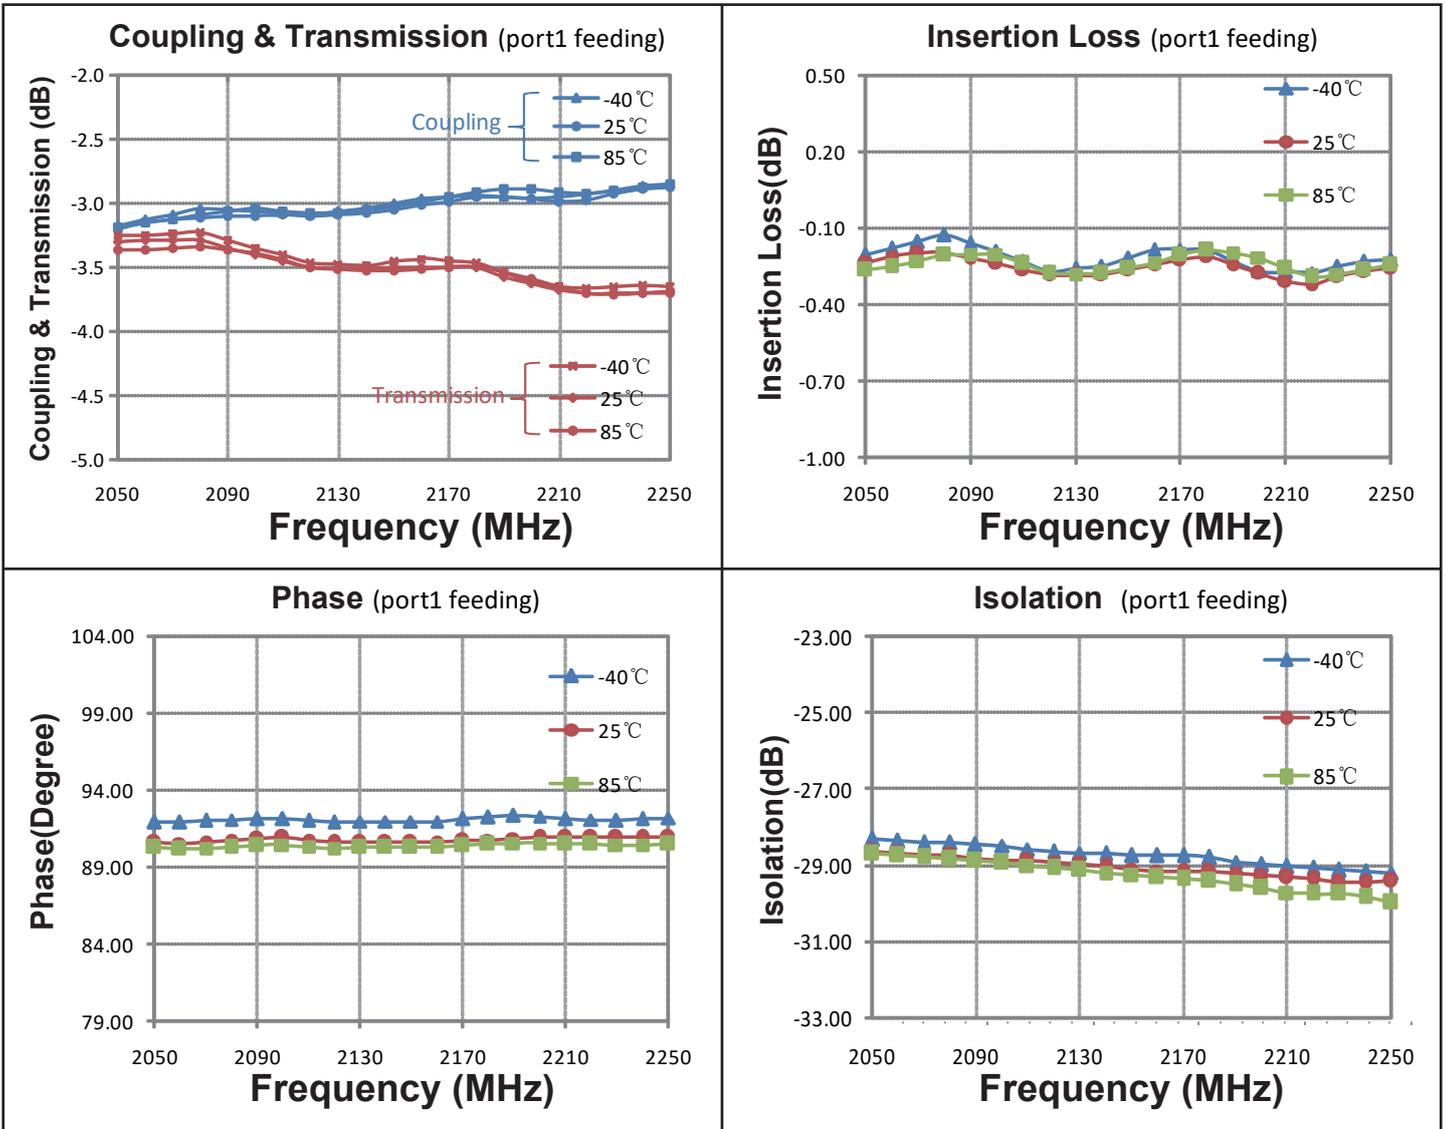

Data Sheet


HC2150U03-040

3dB 90° Coupler IC

2.05 GHz-2.25 GHz



Typical Performance (-40°C, 25°C, 85°C: 2.05-2.25 GHz)

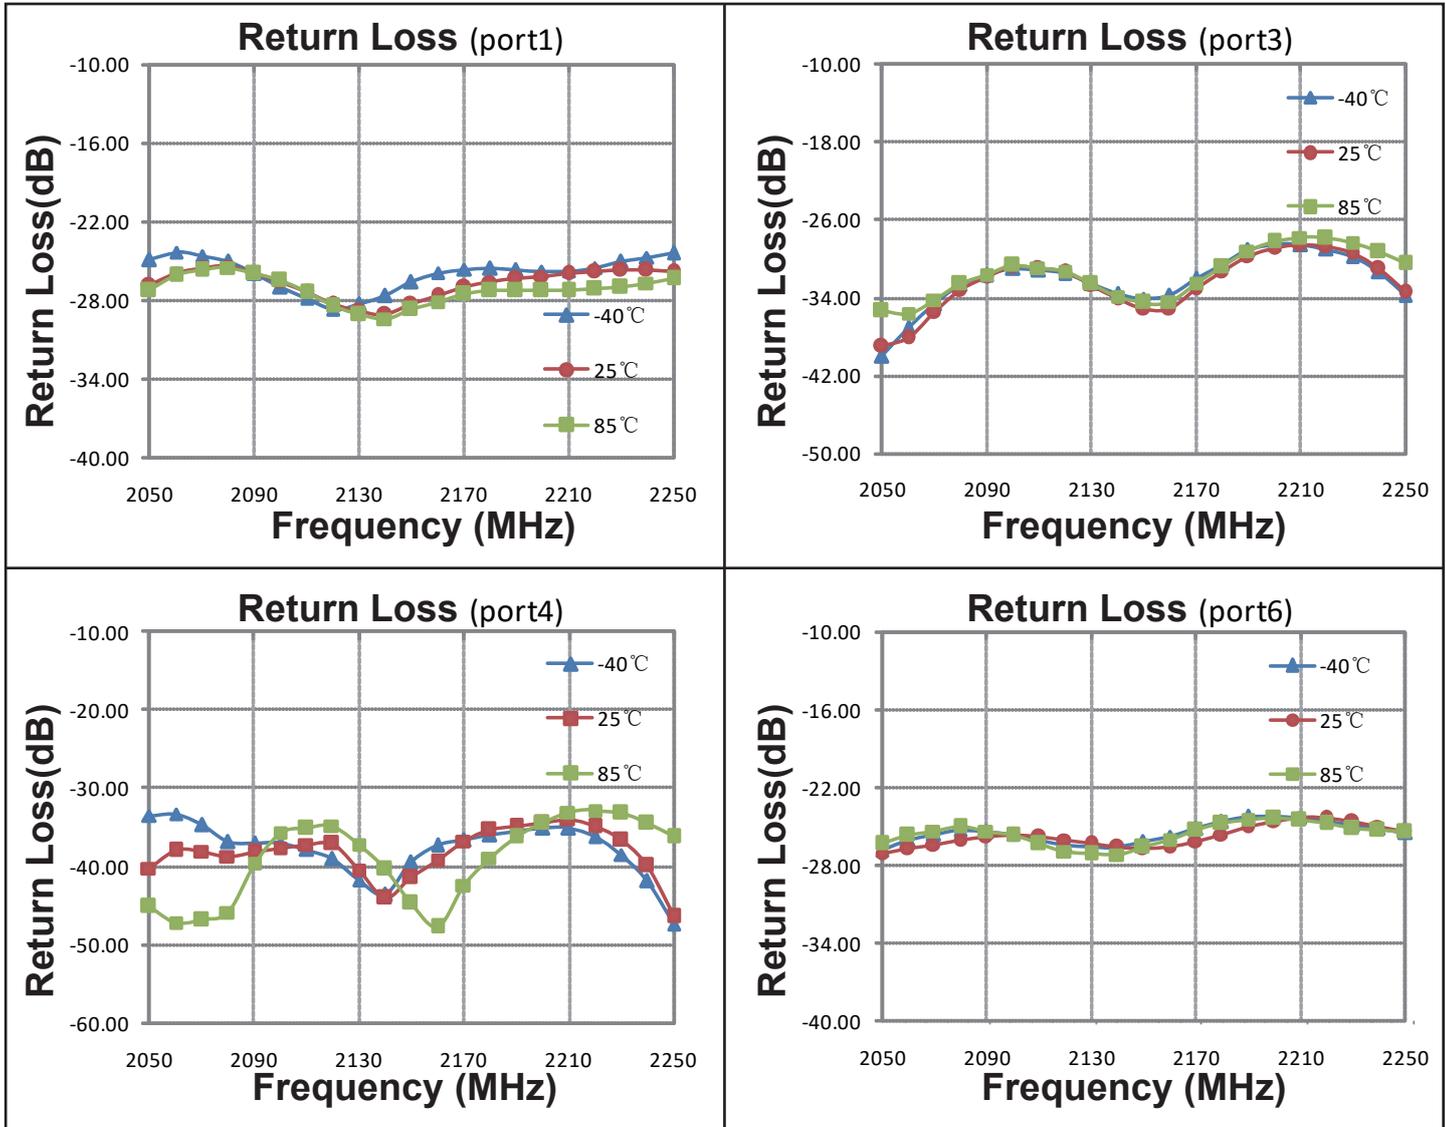


Data Sheet

HC2150U03-040


3dB 90° Coupler IC
2.05 GHz-2.25 GHz




Outline Drawing

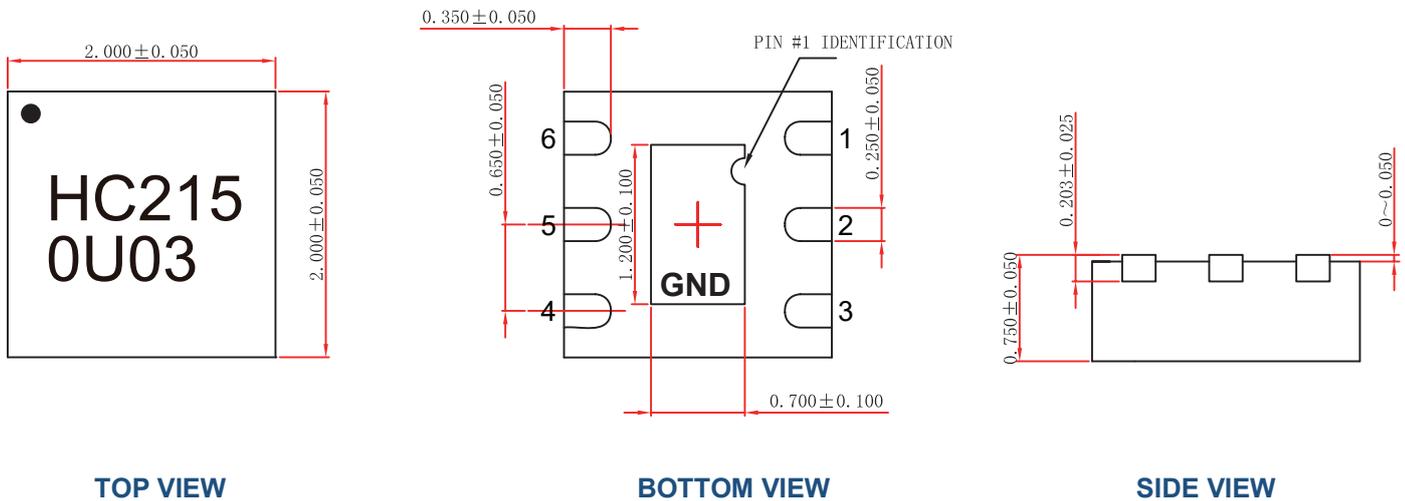

Land Pattern

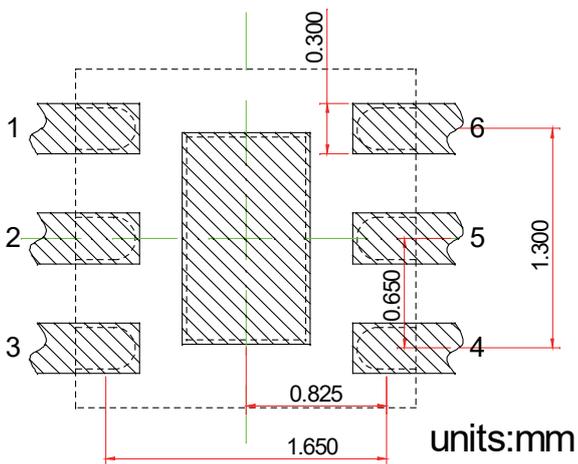

Pin Out

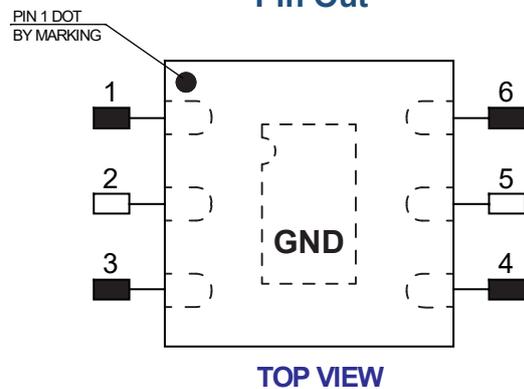

Notes:

1. Require to add Capacitors of DC Blocker between Pins (with black color) and external circuit to prevent DC signal entry to guarantee parts normal work.
2. This part has passed through 100% RF test.

Recommended Land Pattern Top View

Notes: All dimensions show in millimeters

Pin #	Connection
1	IN
2	GND
3	ISOL
4	COUPLED
5	GND
6	DIRECT
Center Pad	GND