

Data Sheet

PD4350U03W



Power Divider/Combiner

2-Way 0° 50Ω 2700-6000 MHz



Features

- Small Size (3×3mm QFN package)
- Passive RF IC, no need external DC power supply
- No need external 100 Ω resistor
- Very Low Loss
- Tight Amplitude Balance
- High Isolation
- Low VSWR
- Good Repeatability
- Tape & Reel
- Operating Temperature -40°C~85°C
- Power handling
 - 2 Watts as a divider
 - 0.5 Watts as a combiner

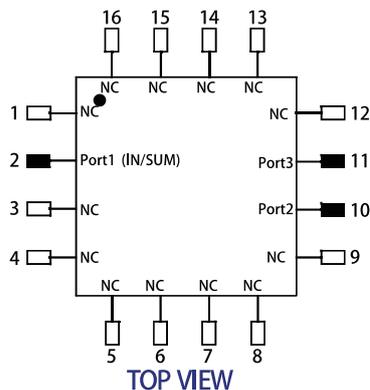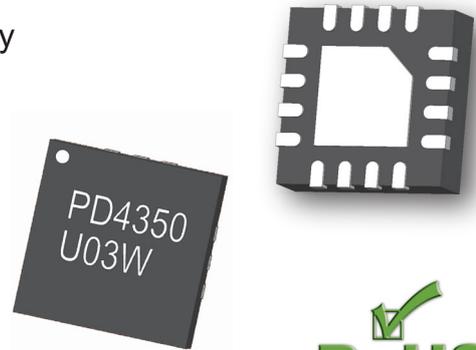


Applications

- Wireless communications
- WLAN / WiMax
- SAT Radio
- ISM band instrument
- Information System for Automotive Safety

Notes:

1. This part has passed through 100% RF test.
2. Suggest to add Capacitors of DC Blocker between Pins (with black color) and external circuit to prevent DC signal entry to guarantee parts normal work.
3. Suggest to add a TVS Diode in parallel between Electrode (with black color) and Capacitor of DC Blocker to provide ESD protection for the product. TVS Diode use ON Semiconductor's ESD9101 is recommended.

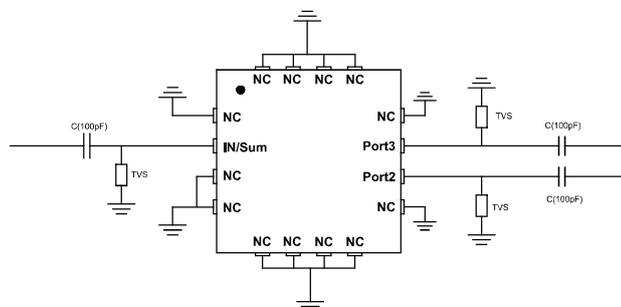

ESD Rating

Human Body Model (HBM): ≤ 450V in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): ≤ 100V in accordance with ANSI/ESD STM 5.2 - 1999

Data Sheet

PD4350U03W

Power Divider/Combiner


2-Way 0° 50Ω 2700-6000 MHz



Electrical Specifications at 25° C

Parameter	Symbol	Min	Typ	Max	Unit
Frequency Range	F	2700		6000	MHz
Insertion Loss (Above 3dB)	I_L		0.7	2	dB
Isolation	Isol	15	20		dB
Phase balance	\varnothing_{bal}		0.5	1.0	deg
Amplitude balance	A_{bal}		0.02	0.30	dB
IRL(S11)			-20.0	-10.0	dB
ORL(S22/S33)			-27.0	-10.0	dB

Typical Performance (-40,25,85 °C , : 2700-6000 MHz)



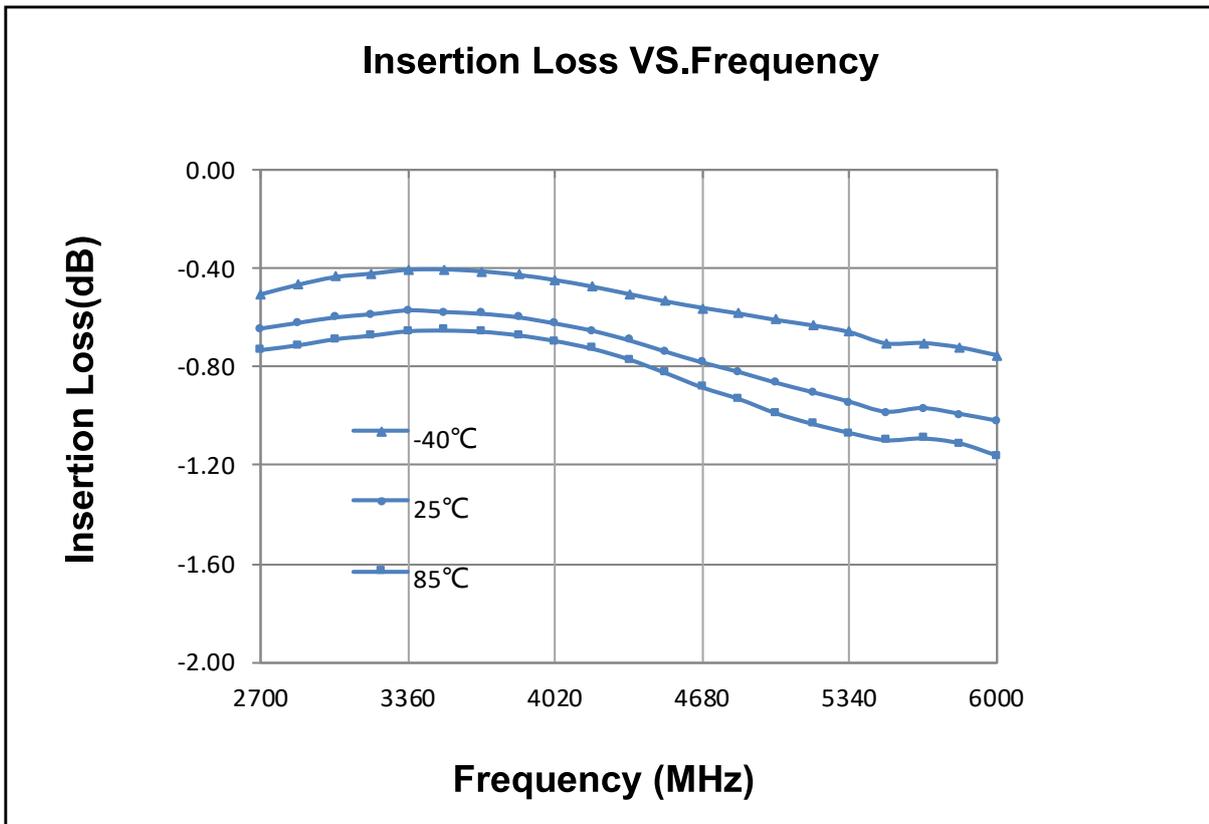


Data Sheet

PD4350U03W

Power Divider/Combiner

2-Way 0° 50Ω 2700-6000 MHz

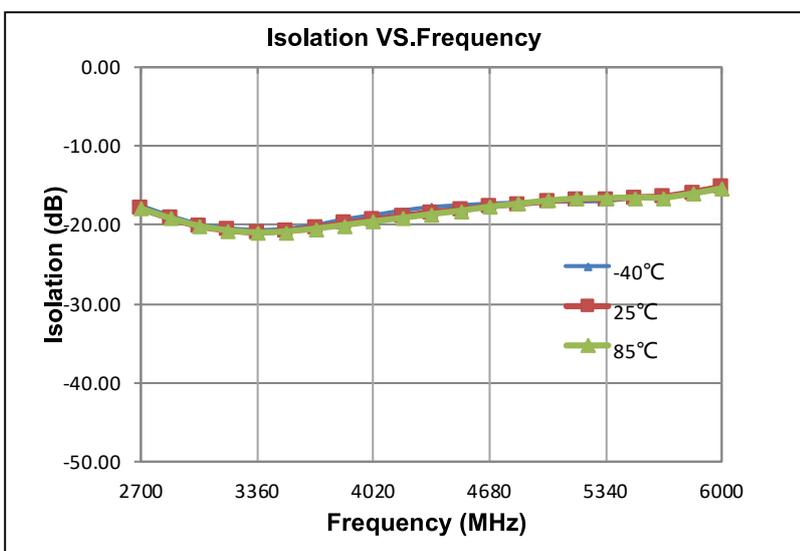
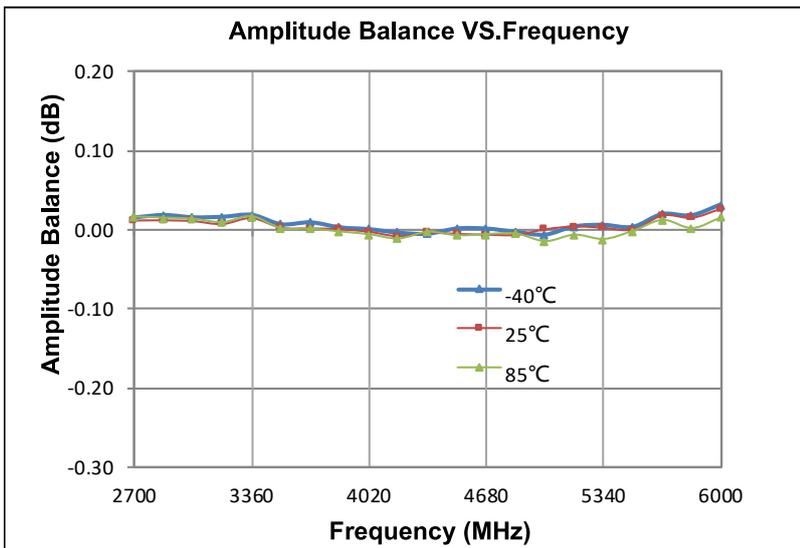
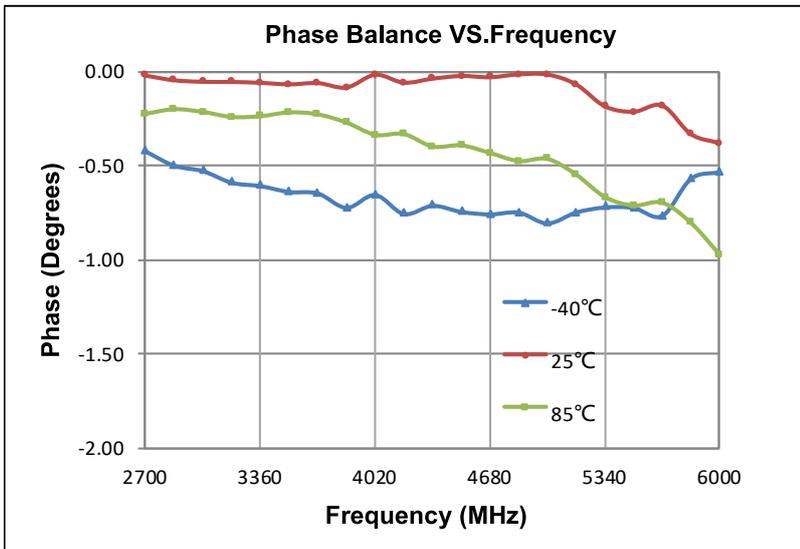


Data Sheet

PD4350U03W

Power Divider/Combiner

2-Way 0° 50Ω 2700-6000 MHz

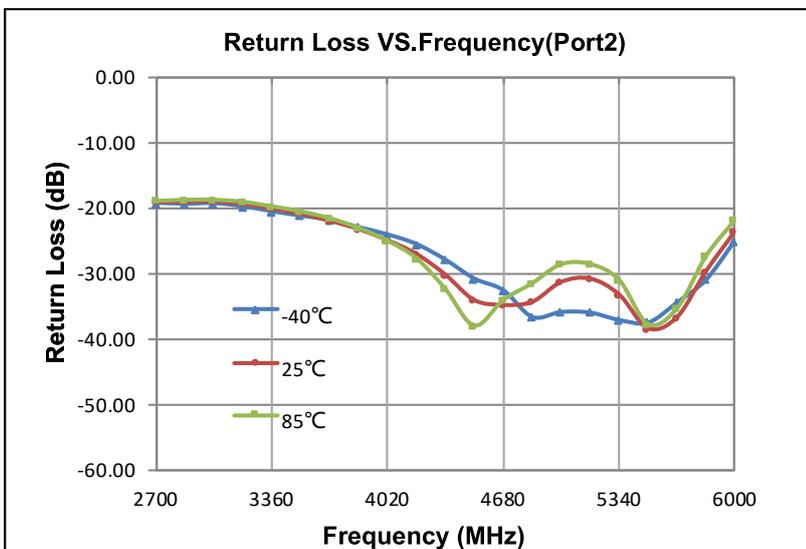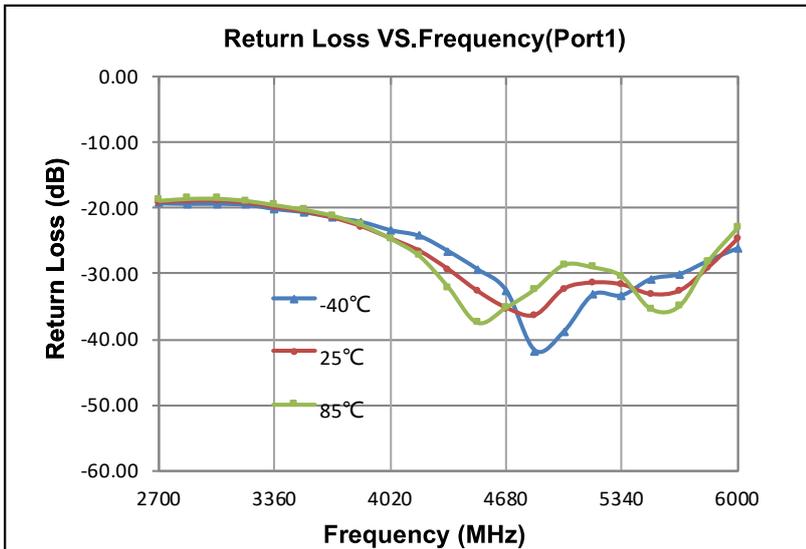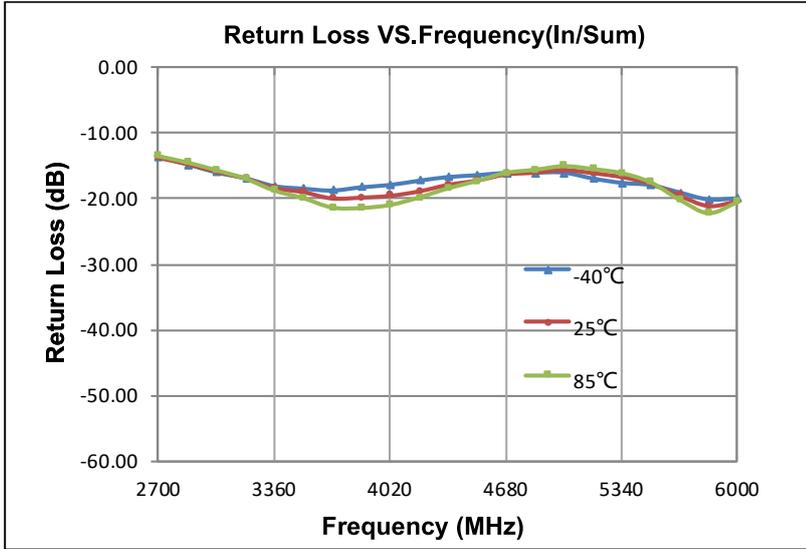

Data Sheet


PD4350U03W

Power Divider/Combiner


2-Way 0° 50Ω 2700-6000 MHz



Outline Drawing

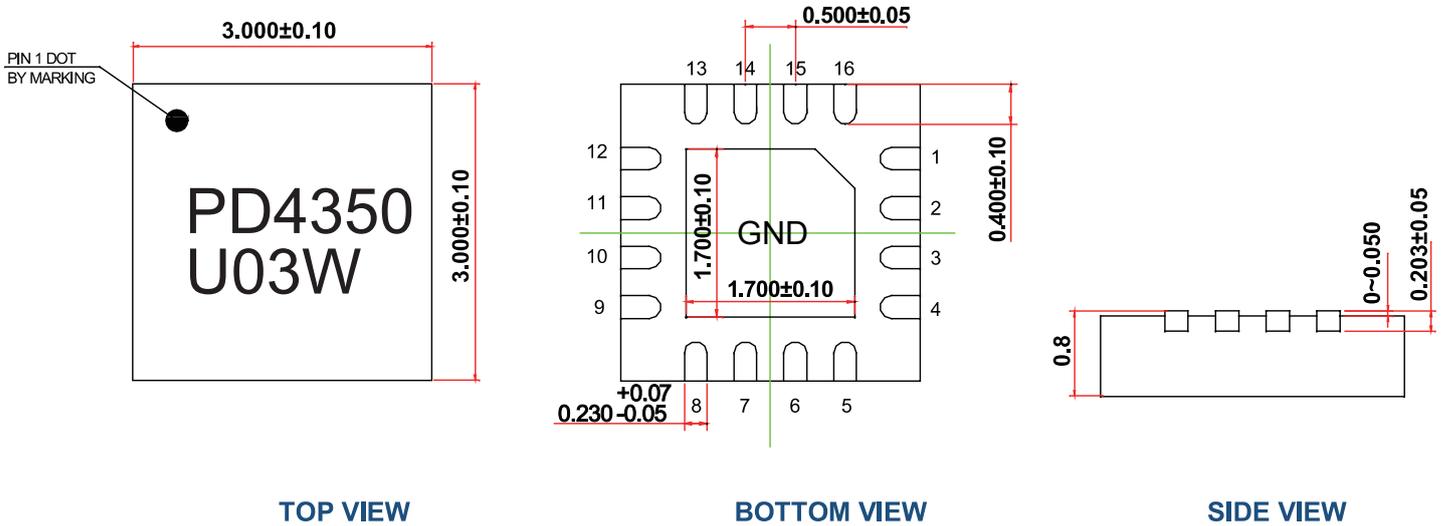


Land Pattern

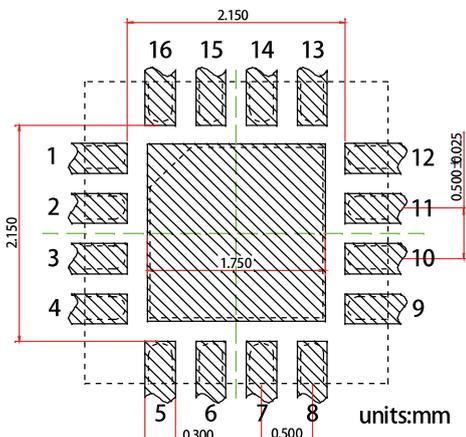

Recommended Land Pattern
Top View

Notes: All dimensions show in millimeters

Pin Out

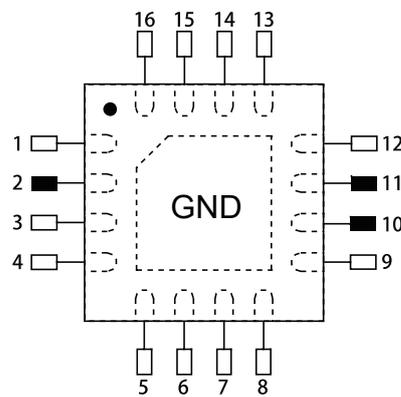

TOP VIEW

Notes:

1. Require to add Capacitors of DC Blocker between Pins (with black color) and external circuit to prevent DC signal entry to guarantee normal work.
2. This part has passed through 100% RF test.

Pin #	Connection
1	NC
2	PORT 1 (IN/SUM)
3	NC
4	NC
5	NC
6	NC
7	NC
8	NC
9	NC
10	PORT 2
11	PORT 3
12	NC
13	NC
14	NC
15	NC
16	NC
Center Pad	GND