


### Features

- Multilayer monolithic construction yields high reliability
- Low insertion loss and small size SMD chip design
- Can simplify your complex tuning and circuit design
- LTCC process

### Specifications



NO.	Parameter	SPC
1	Frequency range	9290-9310 MHz
2	Insertion Loss	3.2dB max. at +25°C;
3	Ripple	0.5dB
4	Attenuation	60 dB min. @ DC-6000MHz 40 dB min. @ 7620MHz 55 dB min. @12000-20000MHz
5	VSWR (In BW)	1.6max.
6	Port Impedance	50Ω
7	Power	0.5W max.
8	Operation Temperature Range	-45°C ~ +85°C

### Construction

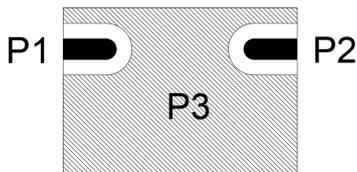


PIN	Connection
1	Input port
2	Output port
3	GND

### Mounting Considerations

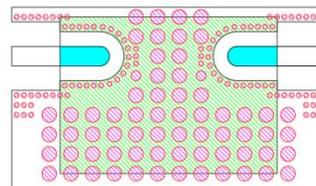


Unit: mm  
Line width to be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness


### Dimensions

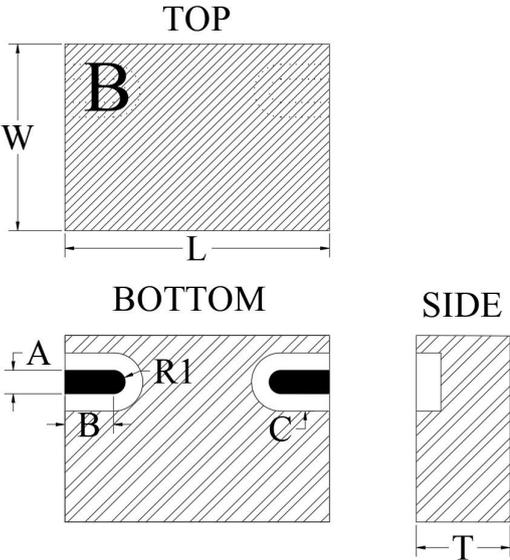Figure	Symbol	Dimension (mm)
	L	4.5 ± 0.20
	W	3.2 ± 0.20
	T	1.5 ± 0.20
	A	0.4 ± 0.10
	B	0.83 ± 0.10
	C	0.3 ± 0.10
	R1	0.2 ± 0.10

### Typical Electrical Characteristics (T=25°C)

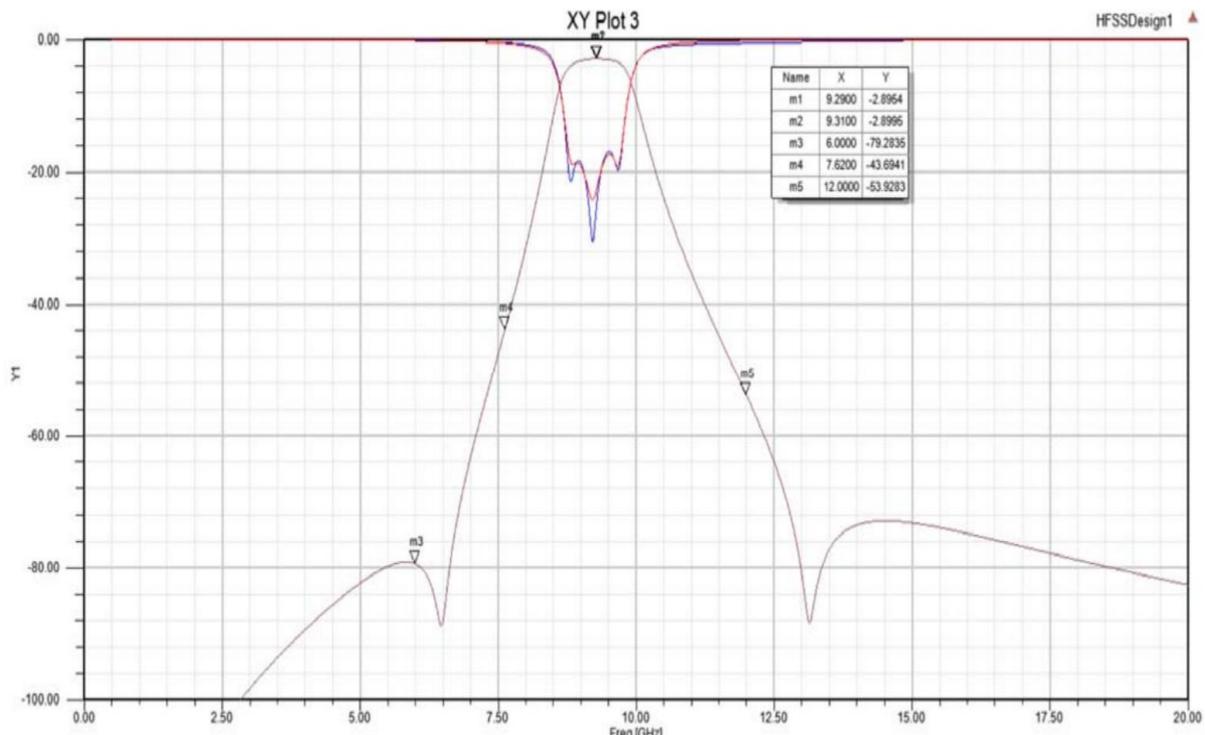

### Solder Reflow Standard Conditioning

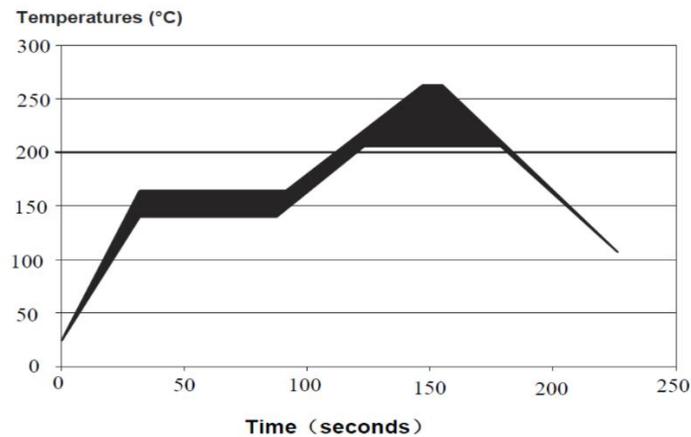

### Storage Conditions

Temperature : +5 to +30 °C

Humidity : 20 to 70% RH

Term of storage : Within 12 months (After the delivery) \*

Baking : Unnecessary

\* After peeling off cover tape, do not keep exposing the products to the open air. For the products stored longer than 12 months, confirm their terminals and solderability before use.