

Features

- Multilayer monolithic construction yields high reliability
- Low insertion loss and small size SMD chip design
- Can simplify your complex tuning and circuit design
- LTCC process
- Isolation resistor, external 100 ohms


Specifications

NO.	Items	Spec	Unit
1	Frequency range	5200~7700	MHz
2	Insertion Loss, above 3.0 dB	0.9 max.	dB
3	Isolation.	12 min.	dB
4	Phase Unbalance	5 max.	°
5	Amplitude Unbalance	0.5 max.	dB
6	Return Loss (Input)	9 min.	dB
7	Return Loss (Output)	10 min.	dB


Operating & Storage Condition (Component)
 Operation Temperature Range: -40°C ~ +85°C
 Storage Temperature Range: -40°C ~ +85°C

Storage Condition before Soldering (Included packaging material)
 Storage Temperature Range: +5 ~ +40 °C
 Humidity: 30 to 70% relative humidity


Construction & Dimensions

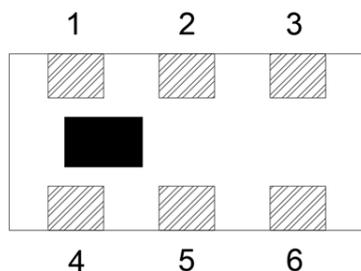

SUM PORT	5
PORT 1	1
PORT 1	3
GND	2, 4, 6
1-3	resistor external 100 ohms

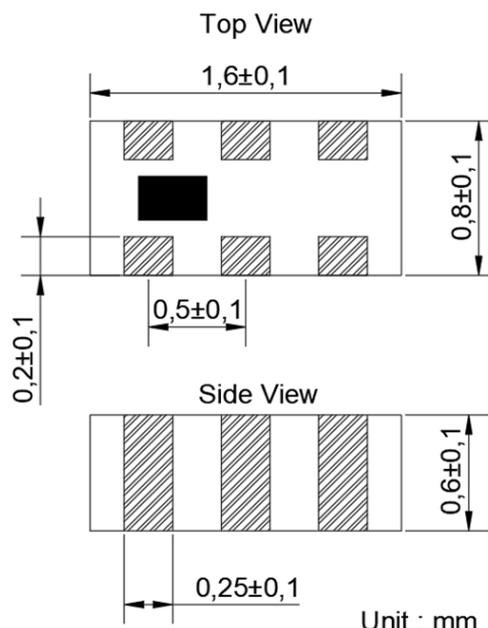

Mounting Considerations

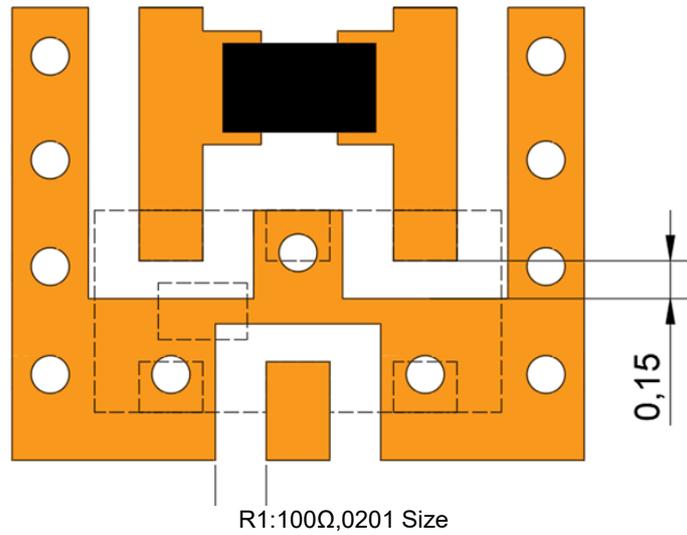

Typical Electrical Characteristics (T=25°C)

