

Part No. Descriptions

| | | | | | | |
|--------|-----------|----------------------------|------------------------------|-------------------------|-------------------------------------|---|
| *** | ** | ** | ** | ** | ** | * |
| Series | Frequency | Attenuation | Temperature Coefficient Code | Metallization Options | Termination Plating Options | |
| | | | | | | |
| STCA, | 06 | (01 to 10) 1dB to 10 dB | N3 to N10 | Planar(no code), W1, W3 | (no code)=lead free or (S)=Lead(Pb) | |

| Part No. | Frequency Range (GHz) | Attenuation (dB) | Temperature Coefficient Code | Temperature Coefficient of Attenuation (dB/dB/°C) | Max. VSWR (:1) @1GHz@25°C | Max. Input Power (mW) | Attenuation Accuracy (dB) |
|------------|-----------------------|------------------|------------------------------|---|---------------------------|-----------------------|---------------------------|
| STCA0601N* | DC-6 | 1 | N3~N9 | -0.003~ -0.009 | 1.20 | 100 | ±0.5 |
| STCA0602N* | DC-6 | 2 | N3~N10 | -0.003~ -0.010 | 1.20 | 100 | ±0.5 |
| STCA0603N* | DC-6 | 3 | N3~N10 | -0.003~ -0.010 | 1.20 | 100 | ±0.5 |
| STCA0604N* | DC-6 | 4 | N3~N10 | -0.003~ -0.010 | 1.20 | 100 | ±0.5 |
| STCA0605N* | DC-6 | 5 | N3~N10 | -0.003~ -0.010 | 1.20 | 100 | ±0.5 |
| STCA0606N* | DC-6 | 6 | N3~N10 | -0.003~ -0.010 | 1.20 | 100 | ±0.5 |
| STCA0607N* | DC-6 | 7 | N3~N10 | -0.003~ -0.010 | 1.20 | 100 | ±0.5 |
| STCA0608N* | DC-6 | 8 | N3~N10 | -0.003~ -0.010 | 1.20 | 100 | ±0.5 |
| STCA0609N* | DC-6 | 9 | N3~N10 | -0.003~ -0.010 | 1.20 | 100 | ±0.5 |
| STCA0610N* | DC-6 | 10 | N3~N10 | -0.003~ -0.010 | 1.20 | 100 | ±0.5 |

General Specifications






- Frequency Range DC to 6GHz
- Attenuation 3dB
- Attenuation Accuracy at 25°C ±0.5dB@1GHz
- VSWR 1.20:1 Max. @1GHz at 25°C
1.20:1 typical @2GHz at 25°C
1.20:1 typical @3 GHz at 25°C
- Nominal Impedance 50 Ohms
- Power Rating 100 mW CW
- Power Derating 100% @ 125°C
Derates to 0% @ 150°C
- Operating Temperature -55°C to +150°C
- Temperature Coefficient over Operating Temperature Range: See Table Above.
Temperature Coefficient Tolerance: ±0.001dB/dB/°C.
- Substrate: Alumina (Al₂O₃)
- Resistive material: Thick film
- Terminal material: Thick film, Nickel barrier with pure tin plate (lead free) or with tin (Sn90) plate (10% lead contained)
- Protective Coating: Thick film (ethyl acetate)
- Package Outline: See Sheet 3.
- Workmanship: per MIL-PRF-55342.
- RoHS Compliant.
- Electrostatic Discharge Control: per MIL-STD-1686.

Unit Marking dB Value (XX), Direction of Shift (N) and TCA Shift (X).
Legibility and Permanency: per MIL-STD-130.

Quality Assurance

- Sample inspect per ANSI/ASQC Z1.4 general inspection, LEVEL II, AQL = 1.0.
 - 1.1 Visual and mechanical examination for conformance to outline package requirements.
- Select five (5) Units from lot measure attenuation from DC to 6 GHz every 20°C over the temperature range -35°C to +105°C.
 - 2.1 Calculate, using linear regression, the slope of the curve.
 - 2.2 Calculate TCA using the following formula: TCA = Slope / Attenuation @ 25°C.
- Test data required for customer.

STCA Response

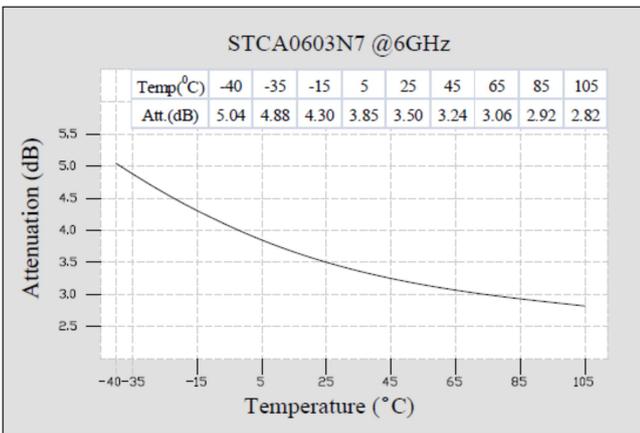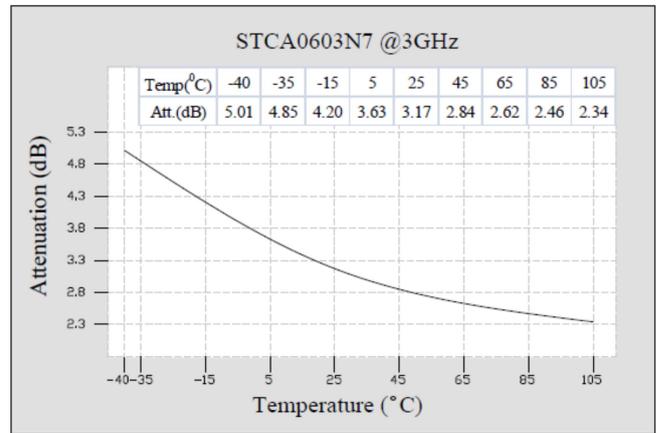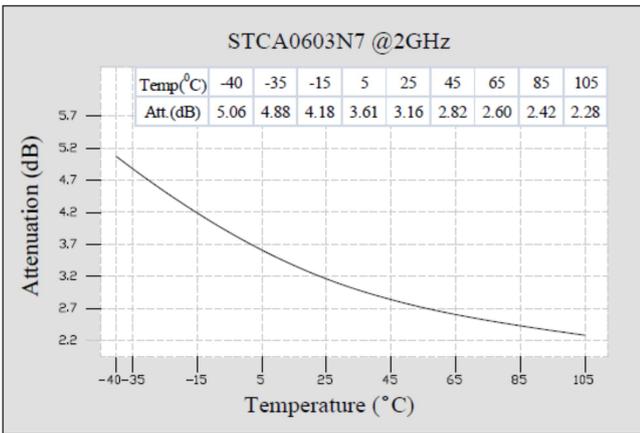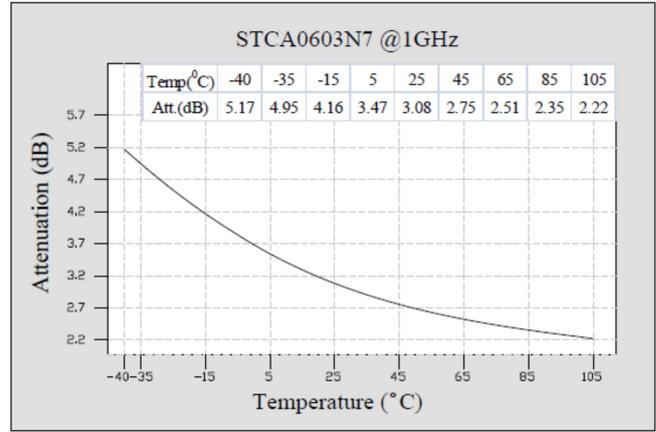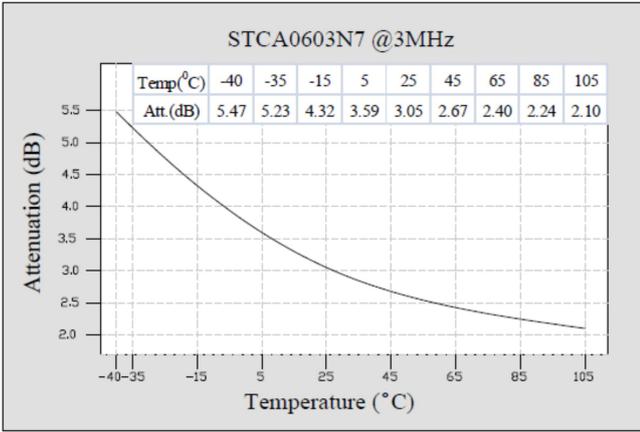


Statistical Table of Attenuation(typ.) VS Temperature

| ATT(dB) \ Temp(°C) | 3MHz | 1GHz | 2GHz | 3GHz |
|--------------------|------|------|------|------|
| -40 | 5.47 | 5.17 | 5.06 | 5.01 |
| -35 | 5.23 | 4.95 | 4.88 | 4.85 |
| -15 | 4.32 | 4.16 | 4.18 | 4.20 |
| 5 | 3.59 | 3.47 | 3.61 | 3.63 |
| 25 | 3.05 | 3.08 | 3.16 | 3.17 |
| 45 | 2.67 | 2.75 | 2.82 | 2.84 |
| 65 | 2.40 | 2.51 | 2.60 | 2.62 |
| 85 | 2.24 | 2.35 | 2.42 | 2.46 |
| 105 | 2.10 | 2.22 | 2.28 | 2.34 |

Recommended Layout

All dimensions shown in mm unless stated otherwise

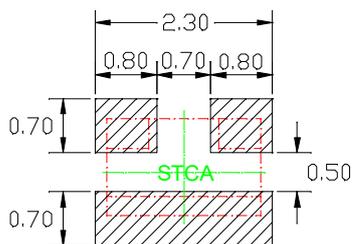


Power Rating & Derating Curve



Package Outlines


All dimensions shown in mm unless stated otherwise

Note: Dimension tolerance in ± 0.10 otherwise mention. * represents number

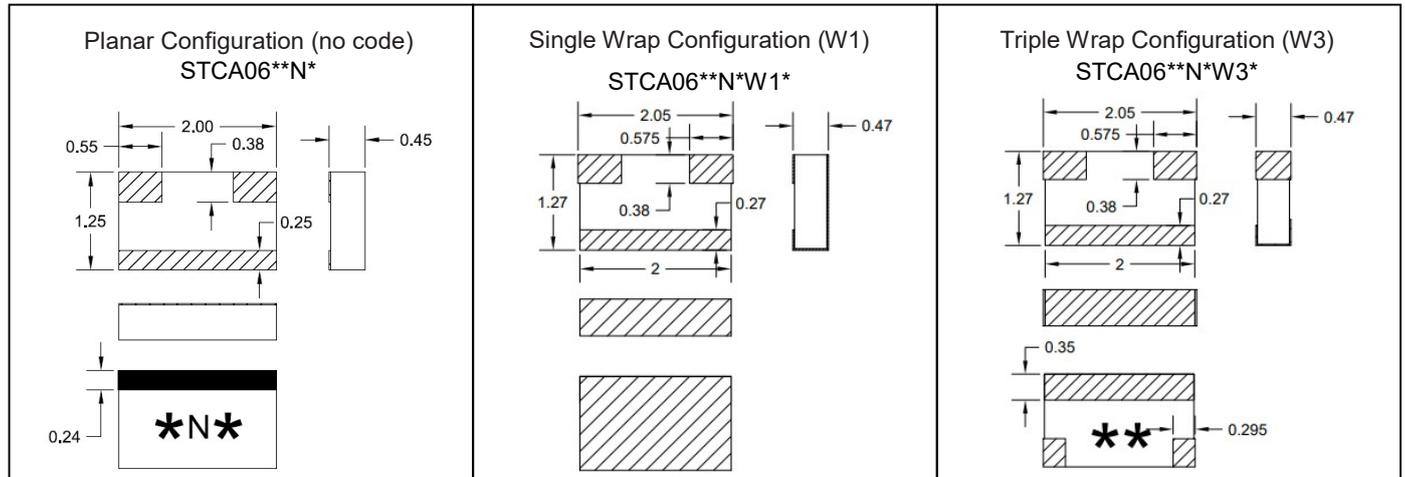

Tape & Reel Drawing


All dimensions shown in mm unless stated otherwise

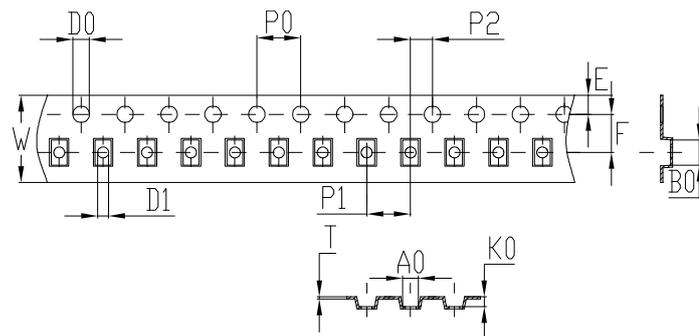

Notice:

- A. 10 Sprocket hole pitch cumulative tolerance is 0.2mm.
- B. Carrier camber shall be not more than 1mm per 100mm through a length of 250mm.
- C. All dimensions meet EIA-418-B requirements.
- D. A0 & B0 measured as indicated.
- E. K0 measured from a place on the inside bottom of the pocket to top surface of carrier.
- F. Material: PE 100
- G. Thickness: 0.20 ± 0.05 mm
- H. 3000 units (maximum) / T&R

| | | | | | | |
|--------|----------------|-----------------|----------------|---------------|--------------------------|--------------------------|
| symbol | A0 | B0 | K0 | P0 | P1 | P2 |
| spec | 1.45 ± 0.1 | 2.30 ± 0.1 | 0.9 ± 0.1 | 4.0 ± 0.1 | 4.0 ± 0.1 | 2.0 ± 0.1 |
| symbol | W | T | E | F | D0 | D1 |
| spec | 8.0 ± 0.1 | 0.20 ± 0.05 | 1.75 ± 0.1 | 3.5 ± 0.1 | $\Phi 1.5^{+0.1}_{-0.0}$ | $\Phi 1.0^{+0.1}_{-0.0}$ |

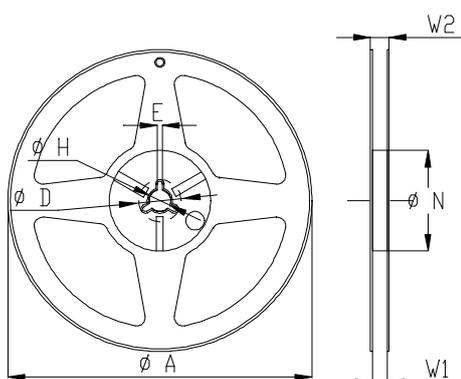

| Symbol | Dimensions(mm) |
|--------|----------------|
| A | $180^{+0/-3}$ |
| N | $60^{+1/-0}$ |
| W1 | 9.0 ± 0.3 |
| W2 | 11 ± 1.0 |
| D | 25 ± 0.8 |
| H | 13 ± 0.2 |
| E | 3 ± 0.5 |

