

Manual Step Attenuator

- ◆ DC to 3GHz
- ◆ 0 to 24dB in 2dB Step
- ◆ 2 Watt
- ◆ Choice of SMA or N Type Connectors



Features

- Using advanced microstrip technology, ultra-small size
- Attenuation values are adjustable in a power-on state, no sudden big reflection.
It adopts an innovative technology, and thus it eliminates sudden big reflection in attenuators when attenuation is being adjusted, preventing the preliminary RF circuit from being burnt, and keeping the system stable
- Step attenuation: 2dB, 4dB, 8dB, 10dB
- 13 attenuation values
- High attenuation accuracy, low insertion loss
- High adjustment accuracy
- Low cost – High Performance
- Adjusting the transmitting (receiving) distance of RF signal precisely. Adjusting accuracy is limited to 5cm.
- Switch repeatability avg.> 10000 operations (5000 cycles) per switch.
- PC(Polycarbonate) Switch, operating temperature of 120°C is available.
- Attenuation values are adjustable in a power-on state, test data can be read continuously, no interruption.



Specifications

Frequency Range	DC to 3.0GHz
Attenuation	0 to 24dB
Step Value	2dB
Insertion loss at 0dB	
SMA connector	0.30dB at 1 GHz 0.60dB at 2 GHz 0.95dB at 3 GHz
Attenuation Accuracy	
SMA connector	0 to +0.35dB at 1GHz 0 to +0.75dB at 2GHz 0 to +1.45dB at 3GHz
Nominal Impedance	50 Ohm
Average Power	2 Watt
Operating Temperature	-40°C to +85°C

Freq. Range (GHz)	Connector Type	VSWR(:1)	
		Typ.	Max.
DC to 3.0	SMA	1.20	1.35

Characteristic

For example the testing curves of VAS062402S2*A of 24dB

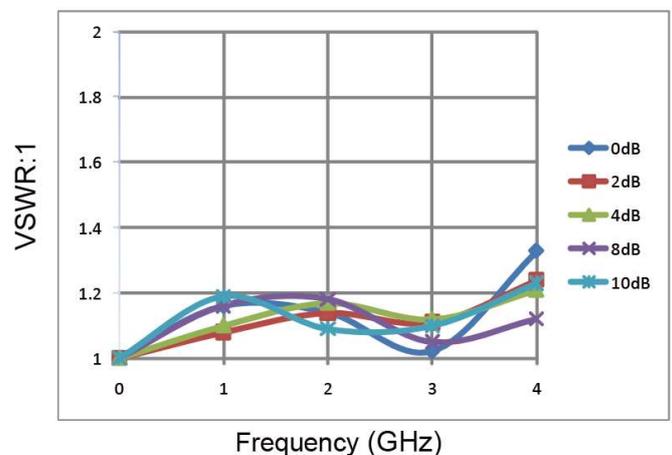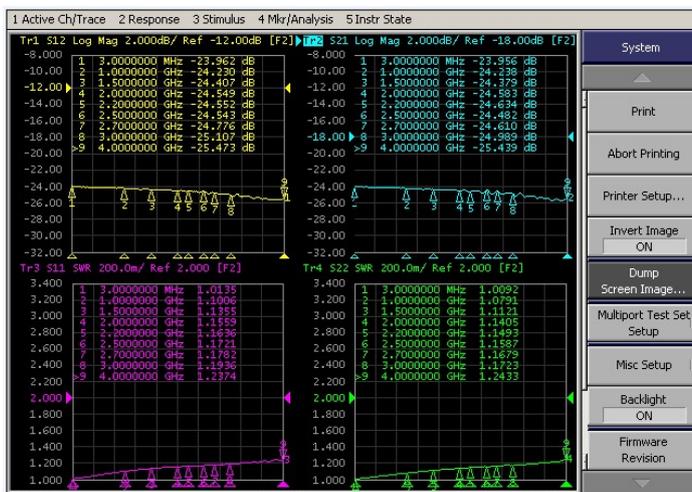

Model No. Description

VAS	<u>**</u>	<u>**</u>	<u>**</u>	<u>*</u>	<u>*</u>	<u>*</u>
	Type	Attenuation Range	Step Value	Connector Type	Max. Power	Connector Option

VAS: Step Variable Attenuator

Type: 06 represents type number

Attenuation Range: Maximum attenuation.

Connector Type: S and N available. S is SMA and N is N type connector.

Max. Power: 2 and 5 are available, currently 2W and 5W are available.


Connector Options:

Options	IO
1	Female/Female
2	Male/Female
3	Male/Male

Package Outlines


Connector Position: "A" represents back connectors, without "A" represents left and right connectors.

SMA Connector Units:mm(inch)

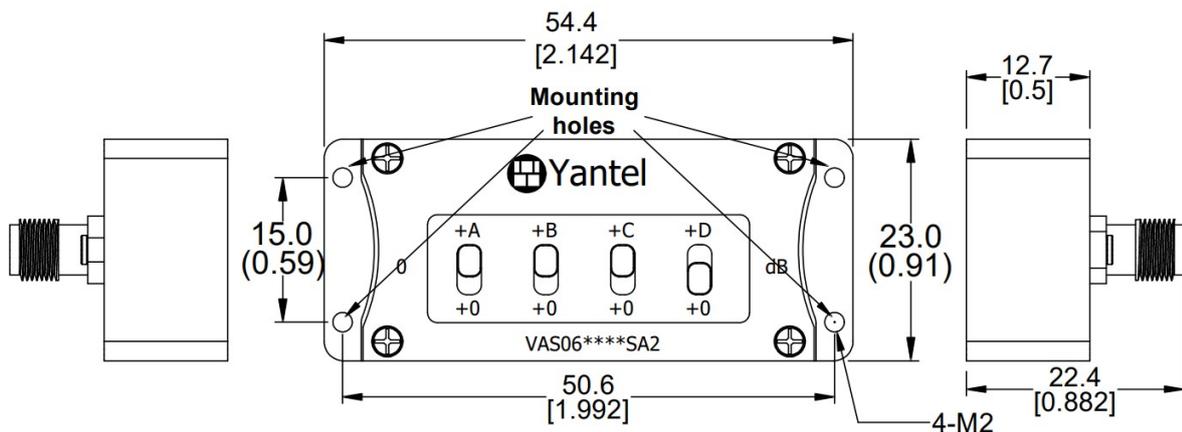

Panel:

Mounting Holes Dimension

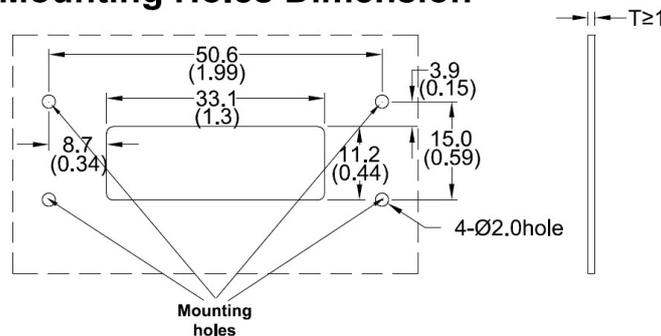


NOTE :

1. ALL dimensions shown in mm (tolerance: +/-0.2mm) unless stated otherwise
2. RoHS Compliant in accordance with EU Directive (2011/65/EU)

Application case:

Repeater: This VAS series can be rack mountable, easier to operate from the rack outside.

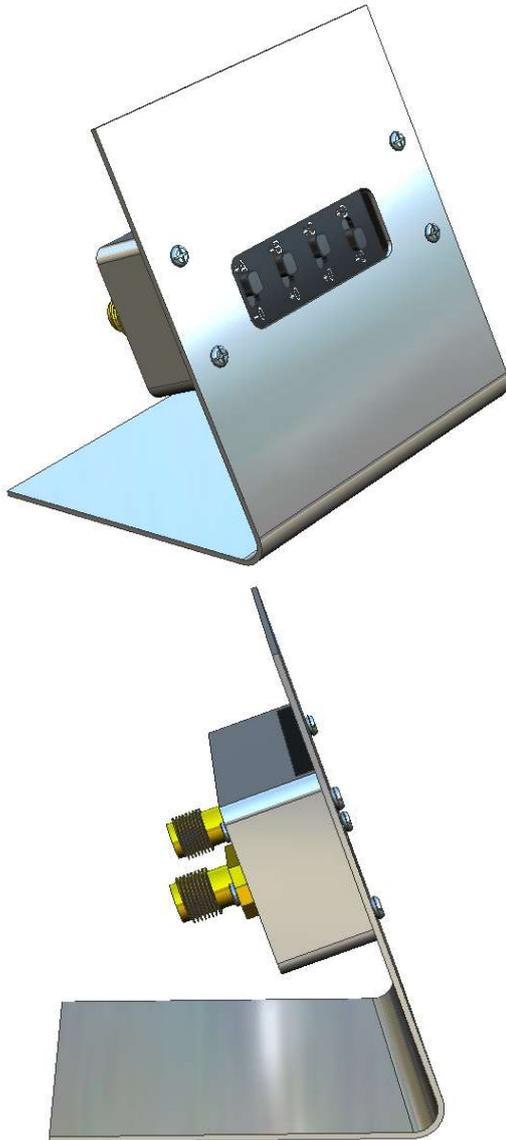Application**Note:**

Attempt to disassemble the product can damage it and void your warranty. In case of any malfunction, please contact your local representative, distributor or the factory immediately.

Attention

It is much easier to adjust the switch by tools like plastic screw driver.