

Description

Yantel's surface mount catalog bandpass filters utilize Yantel's low loss temperature stable materials which offer small size and minimal performance variation over temperature. The catalog BPF's are offered in a variety of frequency bands, which offers a drop in solution with highly repeatable performance.

Features

- Small Size
- Fully Shielded Component
- Solder Surface Mount Package
- Moisture Sensitivity Level: MSL1
- Frequency Stable over Temperature
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω


Specifications*

| Parameter | Frequency Range (GHz) | Min | Typ. | Max |
|--|-----------------------|-----|------|-----|
| Insertion Loss (dB) | 13.0 - 16.0 | | 2.25 | 2.5 |
| Return Loss (dB) | | 12 | 15 | |
| Low Side Rejection (dB) | DC - 10.5 | 40 | 45 | |
| High Side Rejection (dB) | 18.0 - 25.0 | 40 | 45 | |
| CW Input Power** (W) | | | | 5 |
| $\theta_{jc} \left(\frac{^{\circ}\text{C}}{\text{W}} \right)$ | 15 | | | |
| Size (L x W x H) | 9.52 x 3.56 x 2.24 mm | | | |

*Electrical specifications based on typical probed performance at room temperature. Insertion loss shall vary ± 0.5 dB over temperature.

**Power rating assumes the component will be mounted to a PCB with good thermally conducting ground vias as outlined in the recommended PCB layout that are connected to an adequate heat sink. Max power is based on 125°C base temperature.


Typical Measured Performance

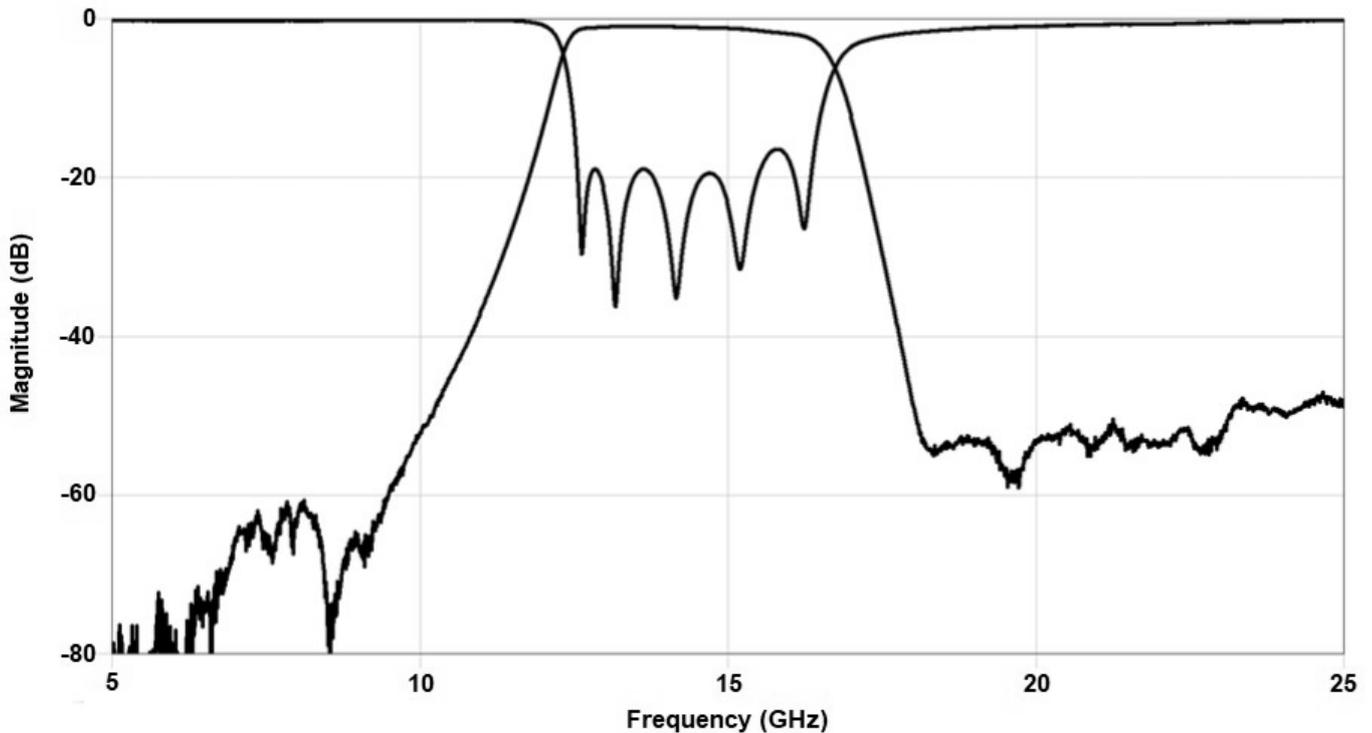

*Typical de-embedded measured performance mounted on a connectorized test fixture. DEB is 0.254mm RO4350B with 50.00ohm CPW ground traces going into the ports at room temperature.

Physical Dimensions

Units = mm

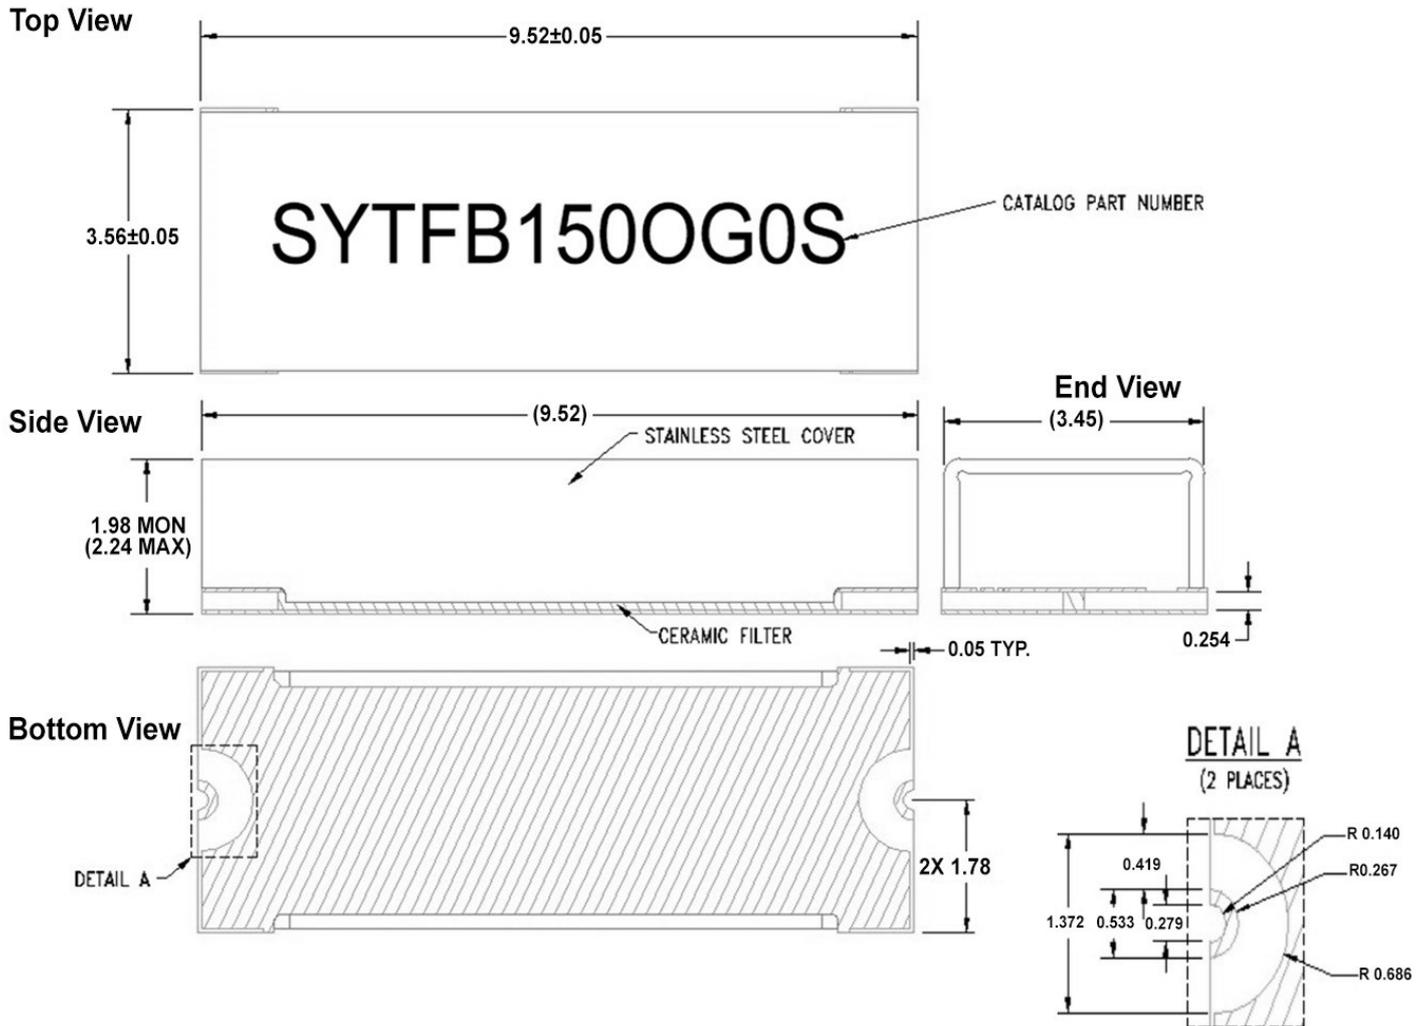


Notes :

1. Termination Finish:
 ENIG: 76-152 μm Au over 1270 μm Ni
2. Maximum Assembly Process Temperature: 250°C
3. Dimension tolerance: ±0.05

Recommended PCB Layout

Unit = mm

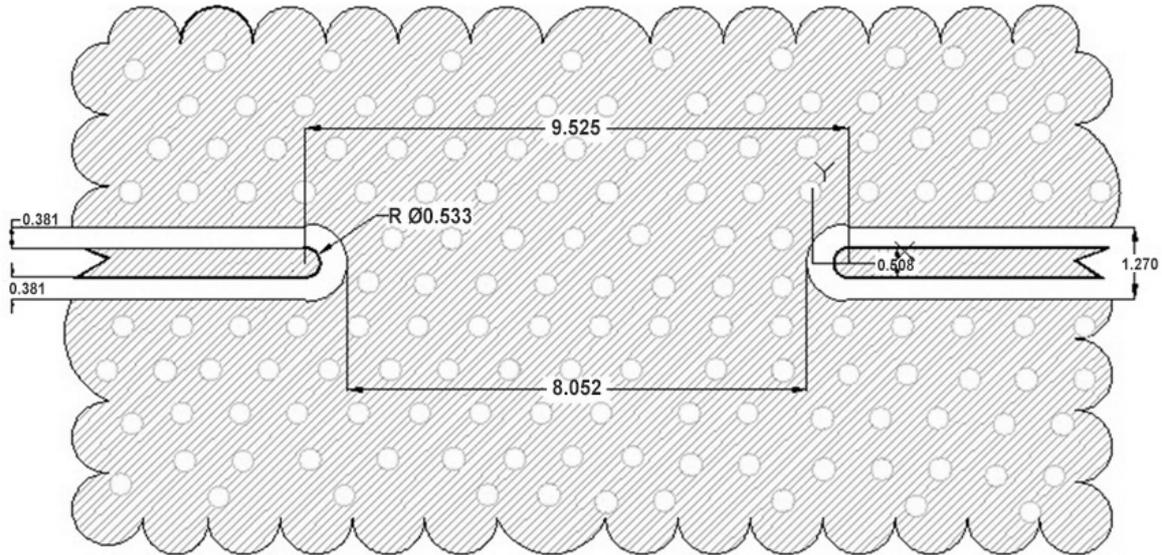

PWB DRILL



PWB TOP METAL

PCB RECOMMENDED STACKUP

Filter is matched to RF layer stackup seen below

Dimensions are specified below in mm (not to scale)

Board material : RO4350b
 Board material design dk : 3.66
 CPWG : 0.51mm trace width, 0.38mm gaps

