

### Description

Yantel's surface mounted low-pass filters have the advantages of low insertion loss and return loss, small size, high rejection, good product consistency, etc. The product adopts high-precision innovative manufacturing process, suitable for mass production, competitive cost, and has obvious cost advantages compared with thin film filters.


### Features

- Small size
- Low loss, High rejection
- With shielding cover
- SMD Surface mounted
- Humidity level: MSL1
- Working temperature: -55 to +85°C
- Characteristic Impedance: 50Ω
- Tape package
- Competitive price and suitable for large volume use

### Technical Data (Normal temperature +25°C)

No.	Parameter	Min.	Typical	Max.	Unit
1-1	Model No.	SYTFL185XF4S			
1-2	Size	5.69mm*3.66mm*2.2mm			
1-3	Cut-off Frequency $f_c$		18.0		GHz
1-4	Working Frequency	DC		18.0	GHz
1-5	Insertion Loss		2.5	3.0	dB
1-6	Return Loss	15	20		dB
1-7	Hight Side Rejection	@20.9-39.5GHz	20	25	dB
1-8	Power				dBm
1-9	Working temperature	-55		+85	°C
1-10	Storage temperature	-55		+125	°C
1-11	Output installation method	Surface mounted			


## Dimensions

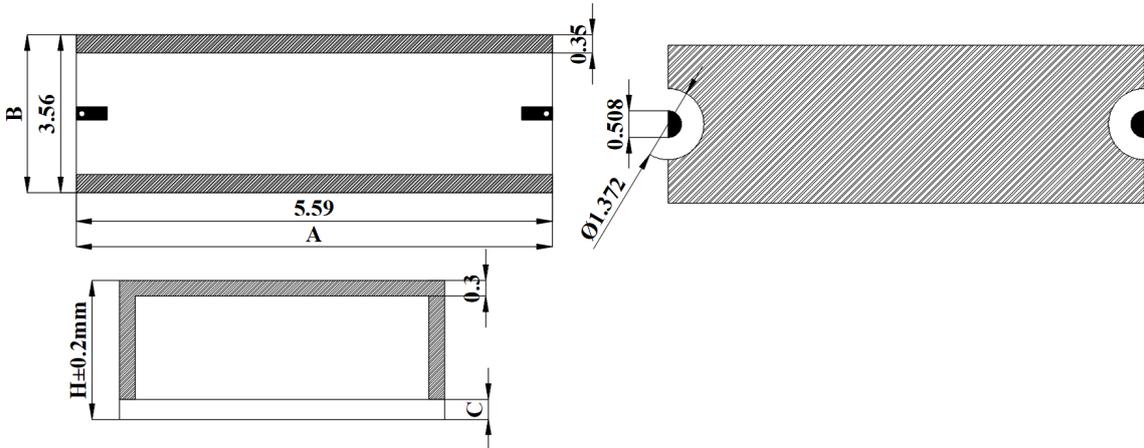2-1	Dimension	See below picture (A、B dimension tolerance: $\pm 0.1\text{mm}$ )
		
2-2	Size	A: 5.69 B: 3.66 C:0.254 H:2.2 (the dimension unit in the drawing is mm, and the shape tolerance of A and B is $\pm 0.1\text{mm}$ )
2-3	Substrate material	Alumina (Er=9.8)
2-4	Surface treatment	Gold plating

## Version status

Version No.	Version date	File status
V5	20250717	√

## Recommended assembly drawing

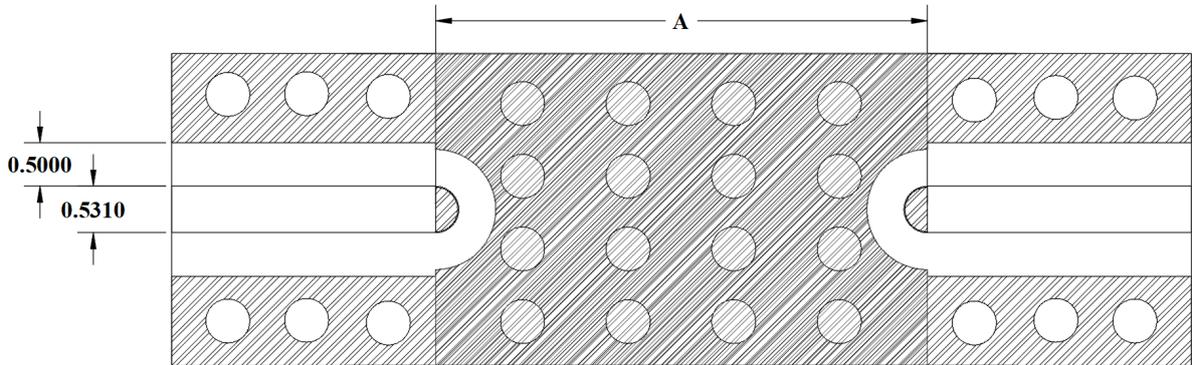

## Remark point:

1. Testing Substrate material is Rogers4350B(Er=3.66),thickness is 0.254mm
2. Make sure there is enough solder on the bottom surface of the filter and ensure good grounding.
3. The maximum temperature during assembly is 250°C.

## Simulation Curve:

