

### Fixed Attenuator Chip

- ◆ DC to 6 GHz
- ◆ 3 dB
- ◆ 2W(Al<sub>2</sub>O<sub>3</sub>) 或 5W(BeO)

#### Features

- High attenuation accuracy
- Small VSWR
- Laser trimmed
- Low cost-high performance

#### Model No. Description

FACXXXX



X-Power:(no code)=2W or (P)=5W

XX- attenuation: \*\*dB.

XX- frequency range 06: DC to 6GHz  
 10: DC to 10GHz  
 12: DC to 12.4GHz  
 18: DC to 18GHz  
 26: DC to 26.5GHz.

#### Characteristic

For example the testing curves of FAC0603\*

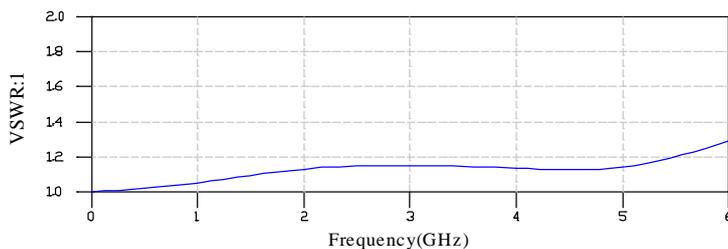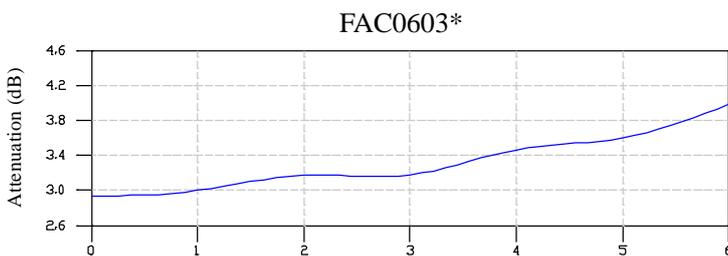


#### Specifications


Frequency Range	DC to 6 GHz
Attenuation	3 dB
Attenuation Accuracy (Typical.)	±0.2 dB DC to 2 GHz + 0.5 dB 2 to 4 GHz + 0.8 dB 4 to 6 GHz
Nominal Impedance	50 Ohm
Rated Input Power	2W(Al <sub>2</sub> O <sub>3</sub> ) or 5W(BeO)
Operating Temperature	-55 °C to +150 °C

FREQ. RANGE (GHz)	VSWR(:1) Typical
DC to 2	1.10
2 to 4	1.20
4 to 6	1.30

#### Package Outlines

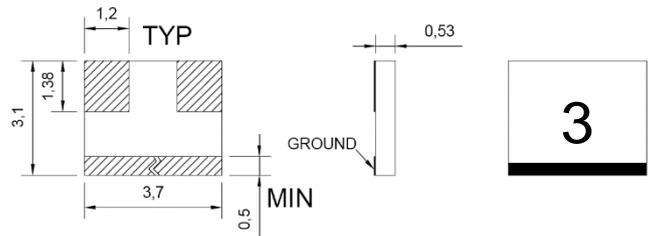


FAC0603 2W(Al<sub>2</sub>O<sub>3</sub>)

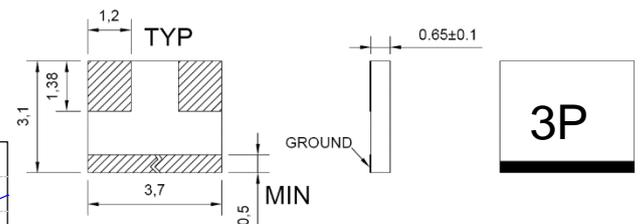

FAC0603P 5W(BeO)

#### Recommended Layout

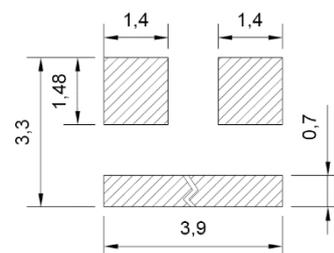

Note: all dimensions shown in mm