

Fixed Attenuator

- ◆ DC to 6 GHz
- ◆ 10 dB
- ◆ 5 Watt
- ◆ SMA Stainless Steel Connectors

Features

- High attenuation accuracy
- Small VSWR
- Stainless Steel
- Ceramic chip
- Low cost-high performance

Model No. Description


FATXXXXXX

- X- Material: (no code)=Brass
(S)=Stainless steel
- X- power handling: 2W or 5W.
- X- connector type: SMA, N type or
SMB connector.
- XX- attenuation: **dB.
- XX- 06 represents type number.

Characteristic

For example the testing curves of FAT0610S5S

FAT0610

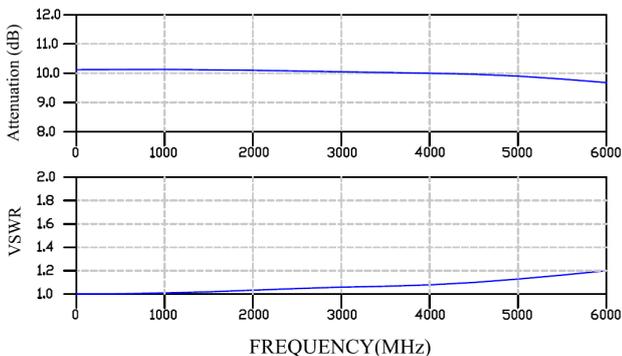

Specifications


Frequency Range	DC to 6 GHz
Attenuation	10 dB
Attenuation Accuracy (Max.)	±0.60 dB over DC – 6 GHz
Nominal Impedance	50 Ohm
Average Power	5 Watt
Operating Temperature	-55 °C to +125°C
Storage Temperature	-55 °C to +125°C

FREQ. RANGE (GHz)	Typical VSWR(:1)	Maximum VSWR(:1)
DC to 2	1.10	
2 to 4	1.15	
4 to 6	1.20	
DC to 6		1.30

Material & Plating

Parts	Material	Plating(Micro-inch)
Body & Nut	Stainless Steel	Passivated
Contact (female & male)	Beryllium Copper	Gold 30
Insulator	Teflon	

Package Outlines

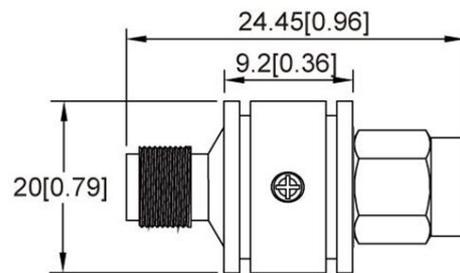

Package type: SMA

Note: all dimensions shown in mm & inch

Note:**Average power at 25°C ambient, derate linearly to 0.5W at 125°C**