

Fixed Attenuator

- ◆ DC to 6 GHz
- ◆ 30 dB
- ◆ 2 Watt
- ◆ SMA Stainless Steel Connectors

Features

- High attenuation accuracy
- Small VSWR
- Stainless Steel
- Ceramic chip
- Low cost-high performance

Specifications

Frequency Range	DC to 6 GHz
Attenuation	30 dB
Attenuation Accuracy (Max.)	±2.0 dB over DC – 6 GHz

Nominal Impedance	50 Ohm
Average Power	2 Watt
Operating Temperature	-55 °C to +125 °C
Storage Temperature	-55 °C to +125 °C

FREQ. RANGE (GHz)	Typical VSWR(:1)	Maximum VSWR(:1)
DC to 3	1.15	
3 to 4	1.20	
4 to 6	1.25	
DC to 6		1.35

Model No. Description

FATXXXXXXXX


- X- Material: (no code)=Brass
(S)=Stainless steel
- X- power handling: 2W or 5W.
- X- connector type: SMA, N type or SMB connector.
- XX- attenuation: **dB.
- XX- 06 represents type number.

Material & Plating


Parts	Material	Plating(Micro-inch)
Body & Nut	Stainless Steel	Passivated
Contact (female & male)	Beryllium Copper	Gold 30
Insulator	Teflon	

Characteristic

For example the testing curves of FAT0630S2S


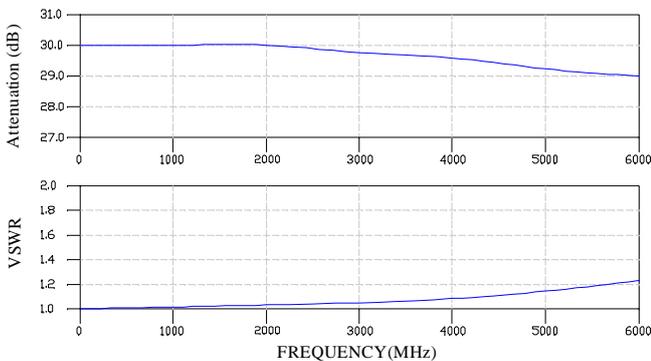


Package Outlines

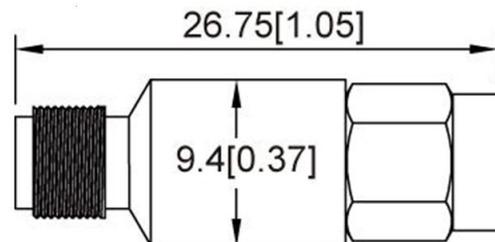


Package type: SMA

Note: all dimensions shown in mm & inch

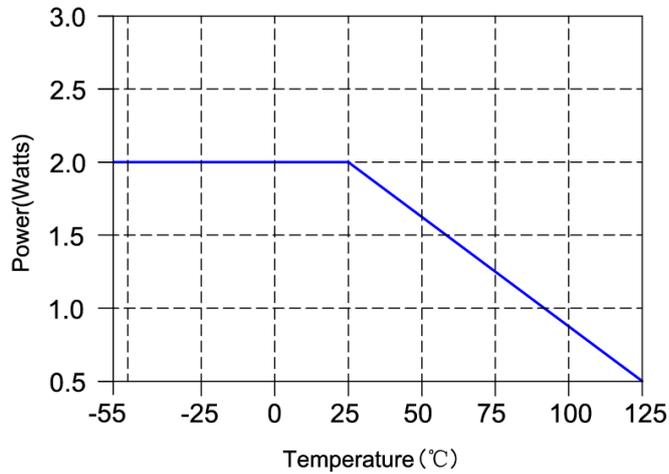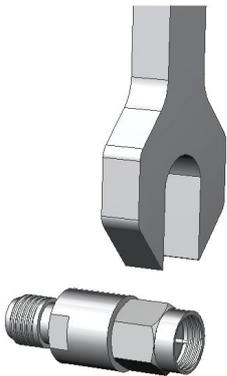Note:**Average power at 25°C ambient, derate linearly to 0.5W at 125°C****Attention**

Screw the male of connector to connect/disconnect.

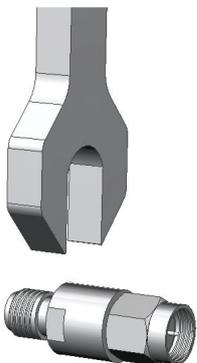

Don't screw the slot of body to connect/disconnect.