

### Description

Yantel's surface mount catalog bandpass filters utilize Yantel's low loss temperature stable materials which offer small size and minimal performance variation over temperature. The catalog BPF's are offered in a variety of frequency bands, which offers a drop in solution with highly repeatable performance.

### Features

- Small Size
- Fully Shielded Component
- Solder Surface Mount Package
- Moisture Sensitivity Level: MSL1
- Frequency Stable over Temperature
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω


### Specifications\*

Parameter	Frequency Range (GHz)	Min	Typ.	Max
Insertion Loss (dB)	2.75 - 3.75		2.2	3.0
Return Loss (dB)		10.0	15.0	12.0
Low Side Rejection (dB)	DC - 1.875	40.0	45.0	
High Side Rejection (dB)	4.125 - 6.0	40.0	45.0	
CW Input Power** (W)				10
$\theta_{jc} \left( \frac{^{\circ}\text{C}}{\text{W}} \right)$	7.5			
Size (L x W x H)	9.14 x 6.60 x 2.50 mm			

\*Electrical specifications based on typical probed performance at room temperature. Insertion loss shall vary  $\pm 0.5\text{dB}$  over temperature.


\*\*Power rating assumes the component will be mounted to a PCB with good thermally conducting ground vias as outlined in the recommended PCB layout that are connected to an adequate heat sink. Max power is based on 125°C base temperature.

### Typical Measured Performance

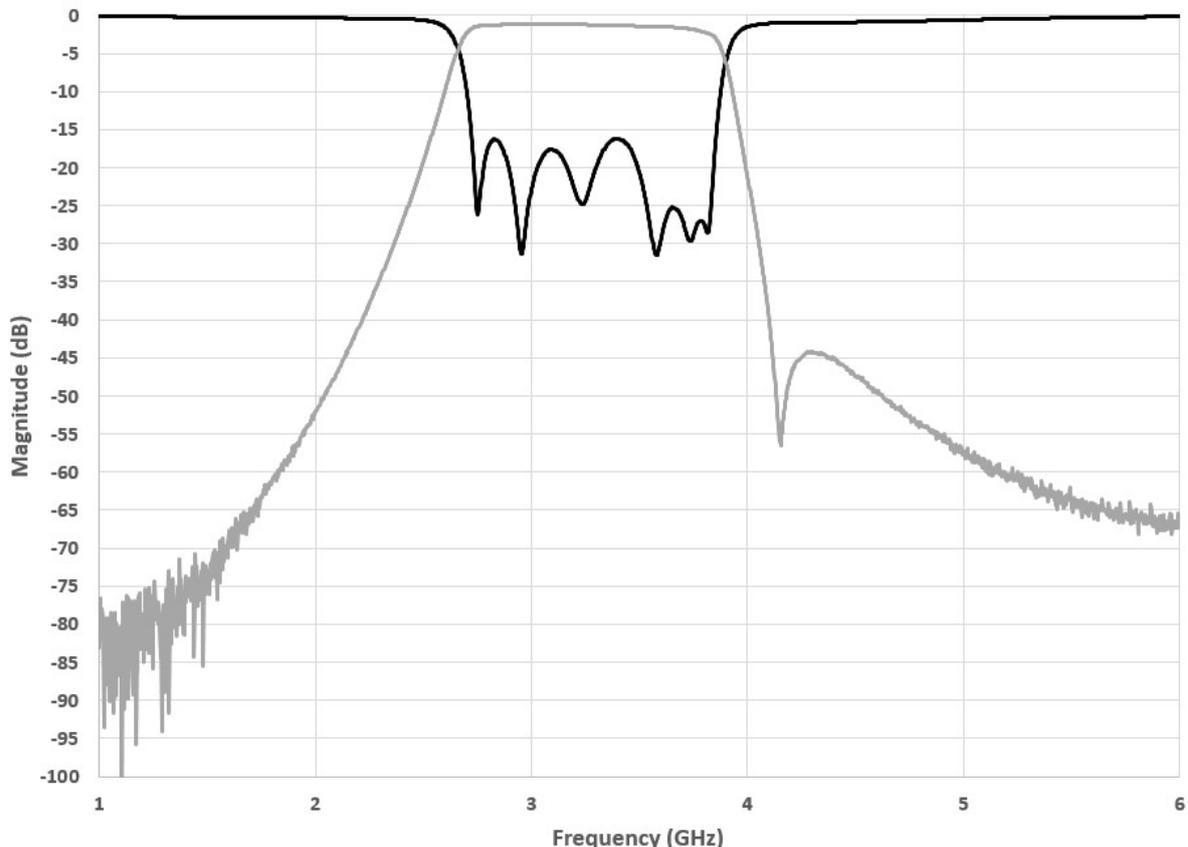

### Physical Dimensions


Units = mm

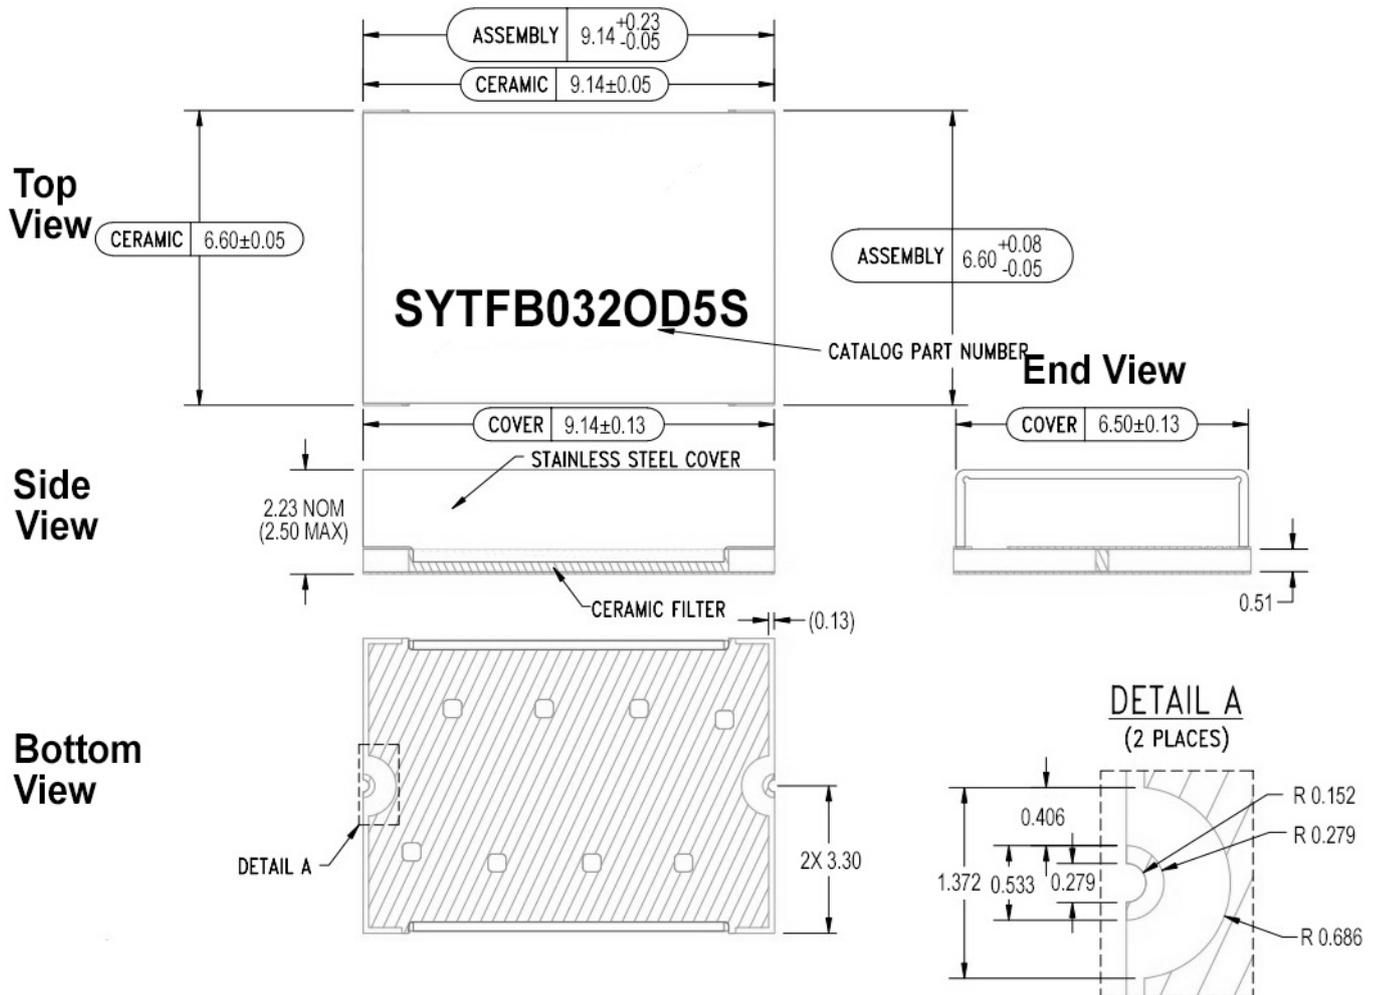

### Notes :

- Termination Finish:  
ENIG: 76-152  $\mu\text{m}$  Au over 1270  $\mu\text{m}$  Ni
- Maximum Assembly Process Temperature: 250°C
- Dimension tolerance:  $\pm 0.05$

## Recommended PCB Layout

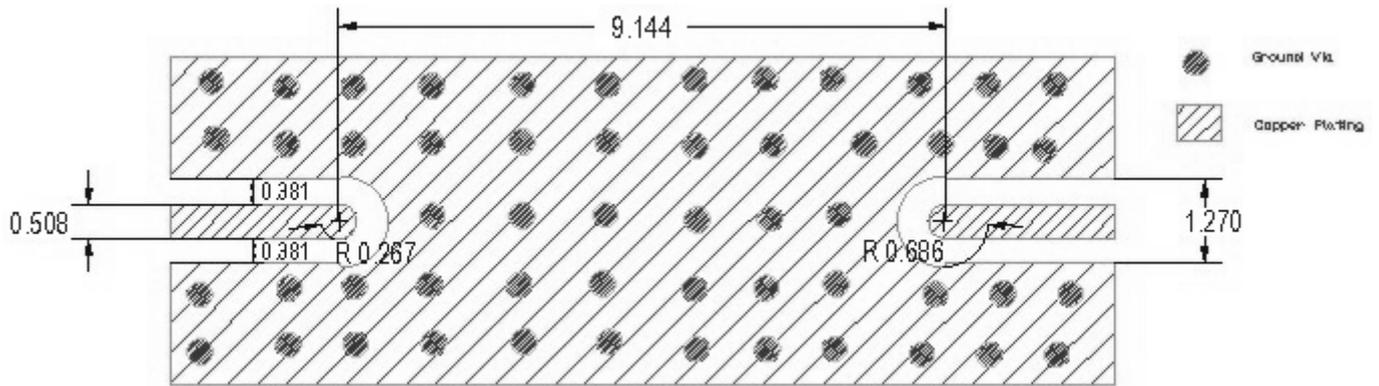

Units = mm

### Notes :

- 50Ω trace dimensions are application specific.
- 50Ω trace dimensions are designed for 0.254mm thick R04350B Rogers Board.
- Ensure adequate grounding beneath the part.